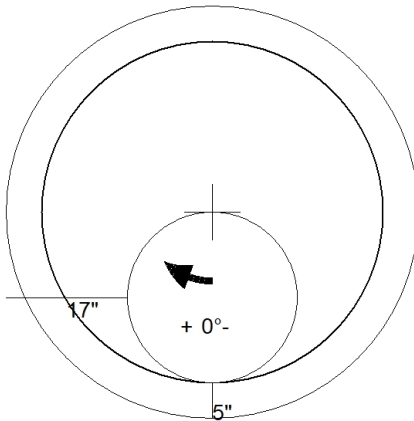
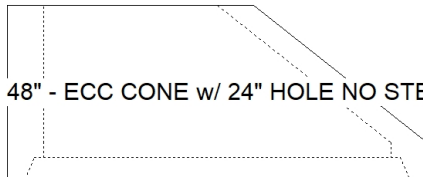


Job Name: 26-3805 - Goldfinch Sewer Ph.3		Plant: 100	Tech: J. Horsley		
Job Location: Evansville, IN Contractor: CAC Custom Homes		9/29/2026 7:43:47 AM	PC: T. Lewis		
Structure ID: SSMH 725					
P3 MH048CN24X-S		ECC CONE w/ 24" HOLE NO STEP w/ XYPEX F/G			
P5) 24" - CASTING HEIGHT - 7" P4) 24" - XYPEX GRADE RING F/F - 3" P3) 48" - ECC CONE w/ 24" HOLE NO STEP w/ XYPEX F/G - 24" P2) 48" - MH RISER w/XYPEX/NO STEP T/G - 36" P1) 48" - MH BASE w/XYPEX T/n - 24" 1) 48" - MH INVERT CHANNEL EWSU w/XYPEX - FULL HEIGHT 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) CASTING - HOE MC-315 F/C Sanitary 2) 48" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 2) PSX - 12-08 NYLO		0 lb 202 lb 1550 lb 2515 lb 2911 lb 1440 lb 0 lb 0 lb 258 lb 0 lb 0 lb 16 lb Structure Total: 8892 lb	<u>Structure Notes:</u> 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. ADMIX = XYPEX C500-NF-RED 4. CASTING BY ICAST (HOE MC-315 F/C "SANITARY") REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
					
					
Coating (Int): Coating (Ext):		Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 24"	Weight (Net): 1550 lb Volume (Net): 0.33cu.yd