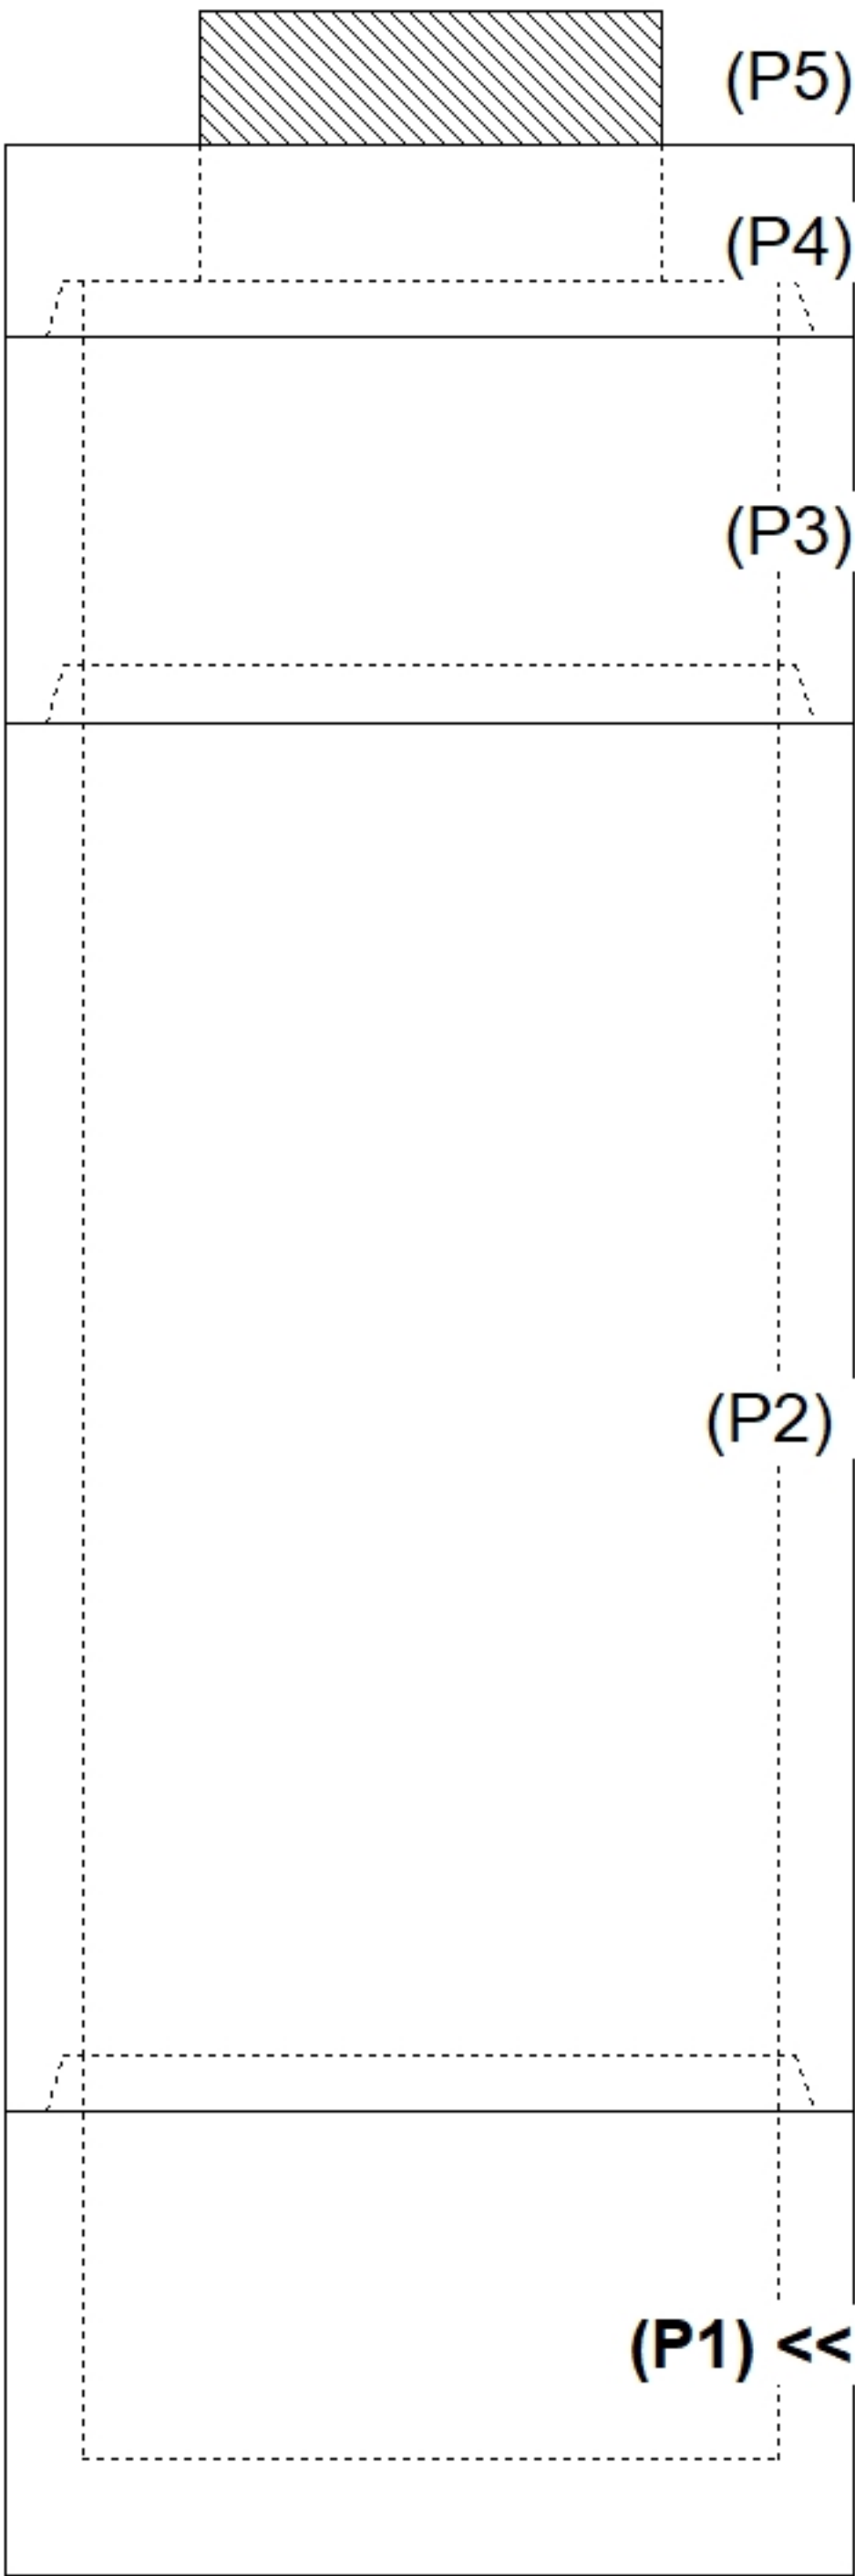
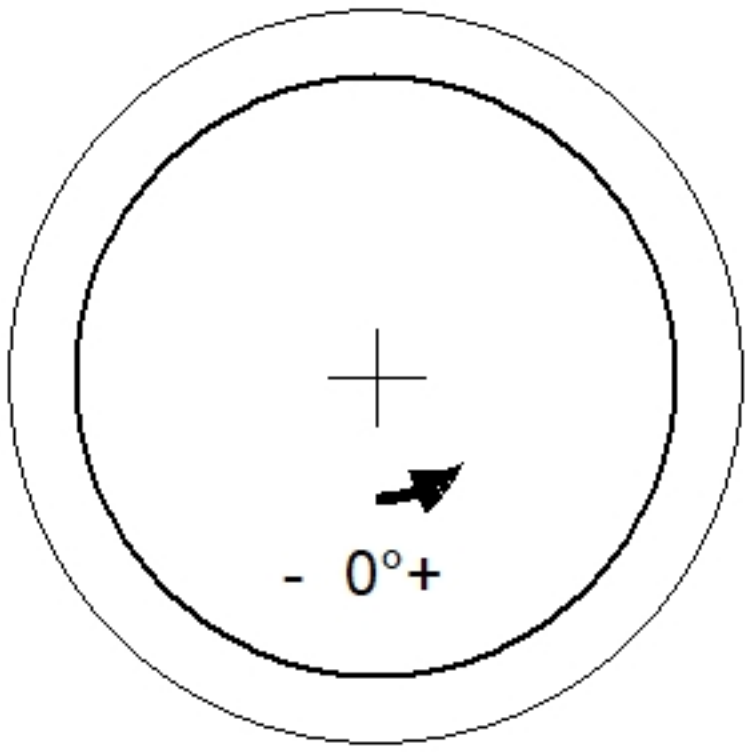
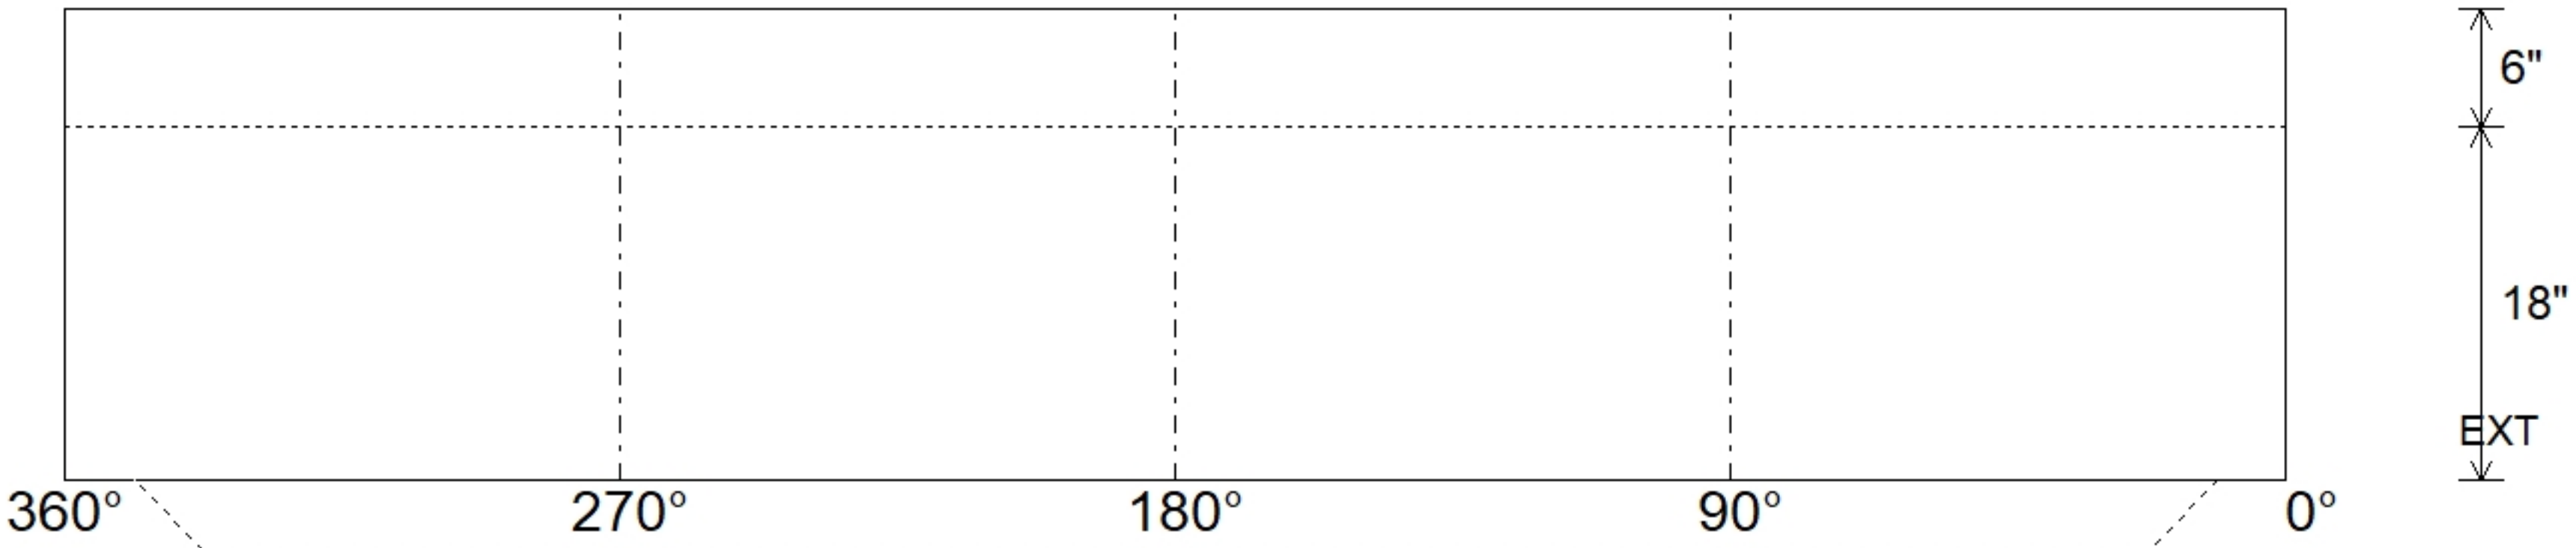


Job Name: 26-3807 ADS North Oldham HS Job Location: Goshen, KY Contractor: ADS Advanced Drainage Systems, Inc.					Plant: Beaver Dam 10/9/2026 12:55:25 PM		Tech: S. Felletter PC: M. Sullivan						
Structure ID: DS-1													
P1			MH036BA18			MH BASE T/n							
P5) 24" - CASTING HEIGHT - 7" P4) 36" - MH FLAT TOP w/ 24" Ctr. Hole F/G - 10" P3) 36" - MH RISER Custom Ht T/G - 20" P2) 36" - MH RISER T/G - 72" P1) 36" - MH BASE T/n - 18" 1) ASSEMBLY REQUIRED 1) CASTING - HOE MC-375 F/C Storm 3) 36" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 1) Hole - 20 1) Hole - 16						0 lb 896 lb 844 lb 2857 lb 1525 lb 0 lb 271 lb 0 lb 0 lb 0 lb 0 lb ----- 6392 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MC-375 F/C "STORM"). 4. LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE. . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 652.5' Rim to Invert: 6.05' Slack: 0.56" Sump: 54.96" Step Position:													
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset			
Invert 1													
Invert 2													
Invert 3													
Invert 4													
Invert 5													
Invert 6													
Invert 7													
Invert 8													
RIGHT-SIDE UP VIEW (int. dimensions) 						UPSIDE-DOWN VIEW (int. dimenions) 							
INSIDE WALL DIMENSIONS 													
Coating (Int): Coating (Ext):			Seam Up: Tongue Seam Dn: n/a		Wall Thickness: 4" Floor Height: 6"		Height (Int): 18" Height (Ext): 24"		Weight (Net): 1525 lb Volume (Net): 0.39cu.yd				