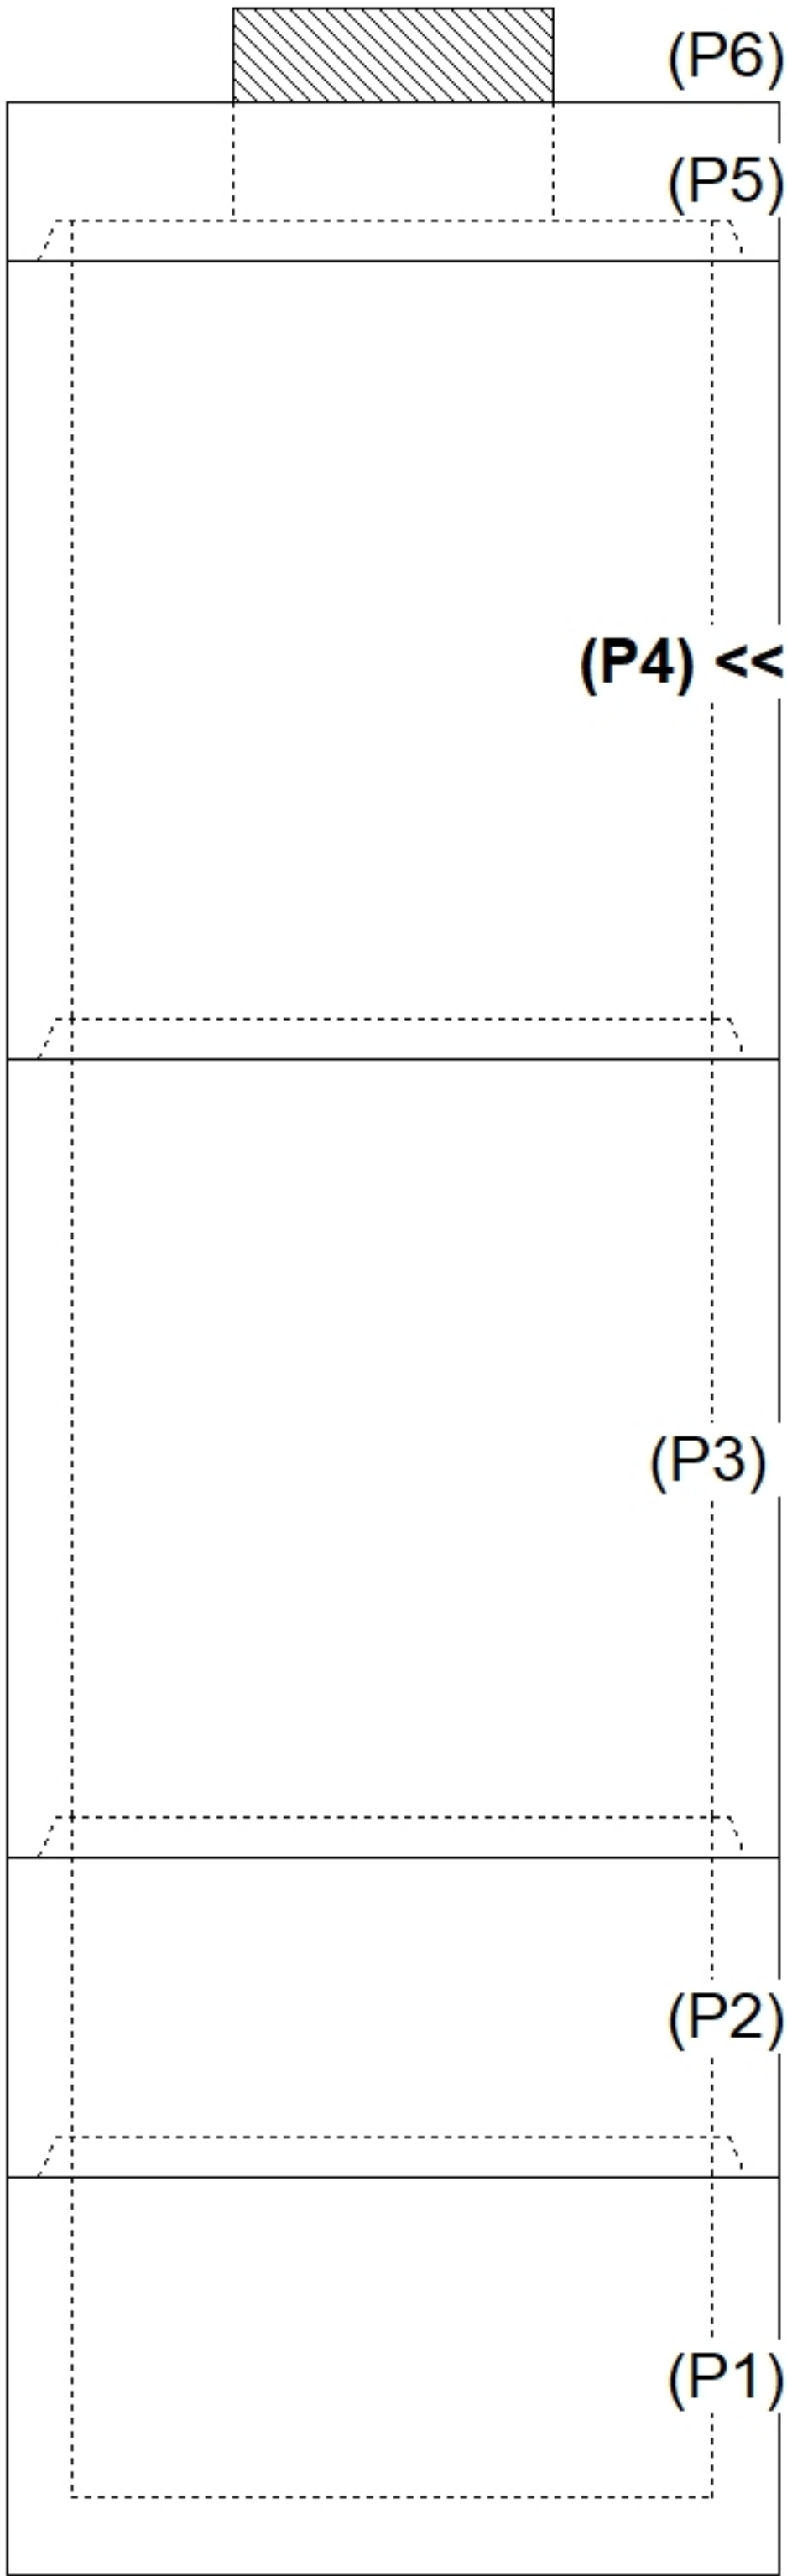
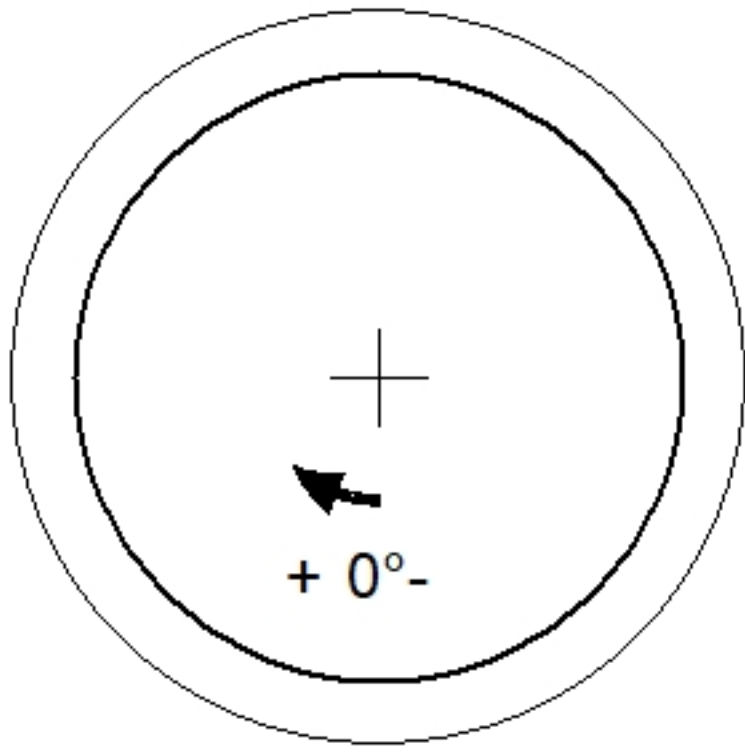
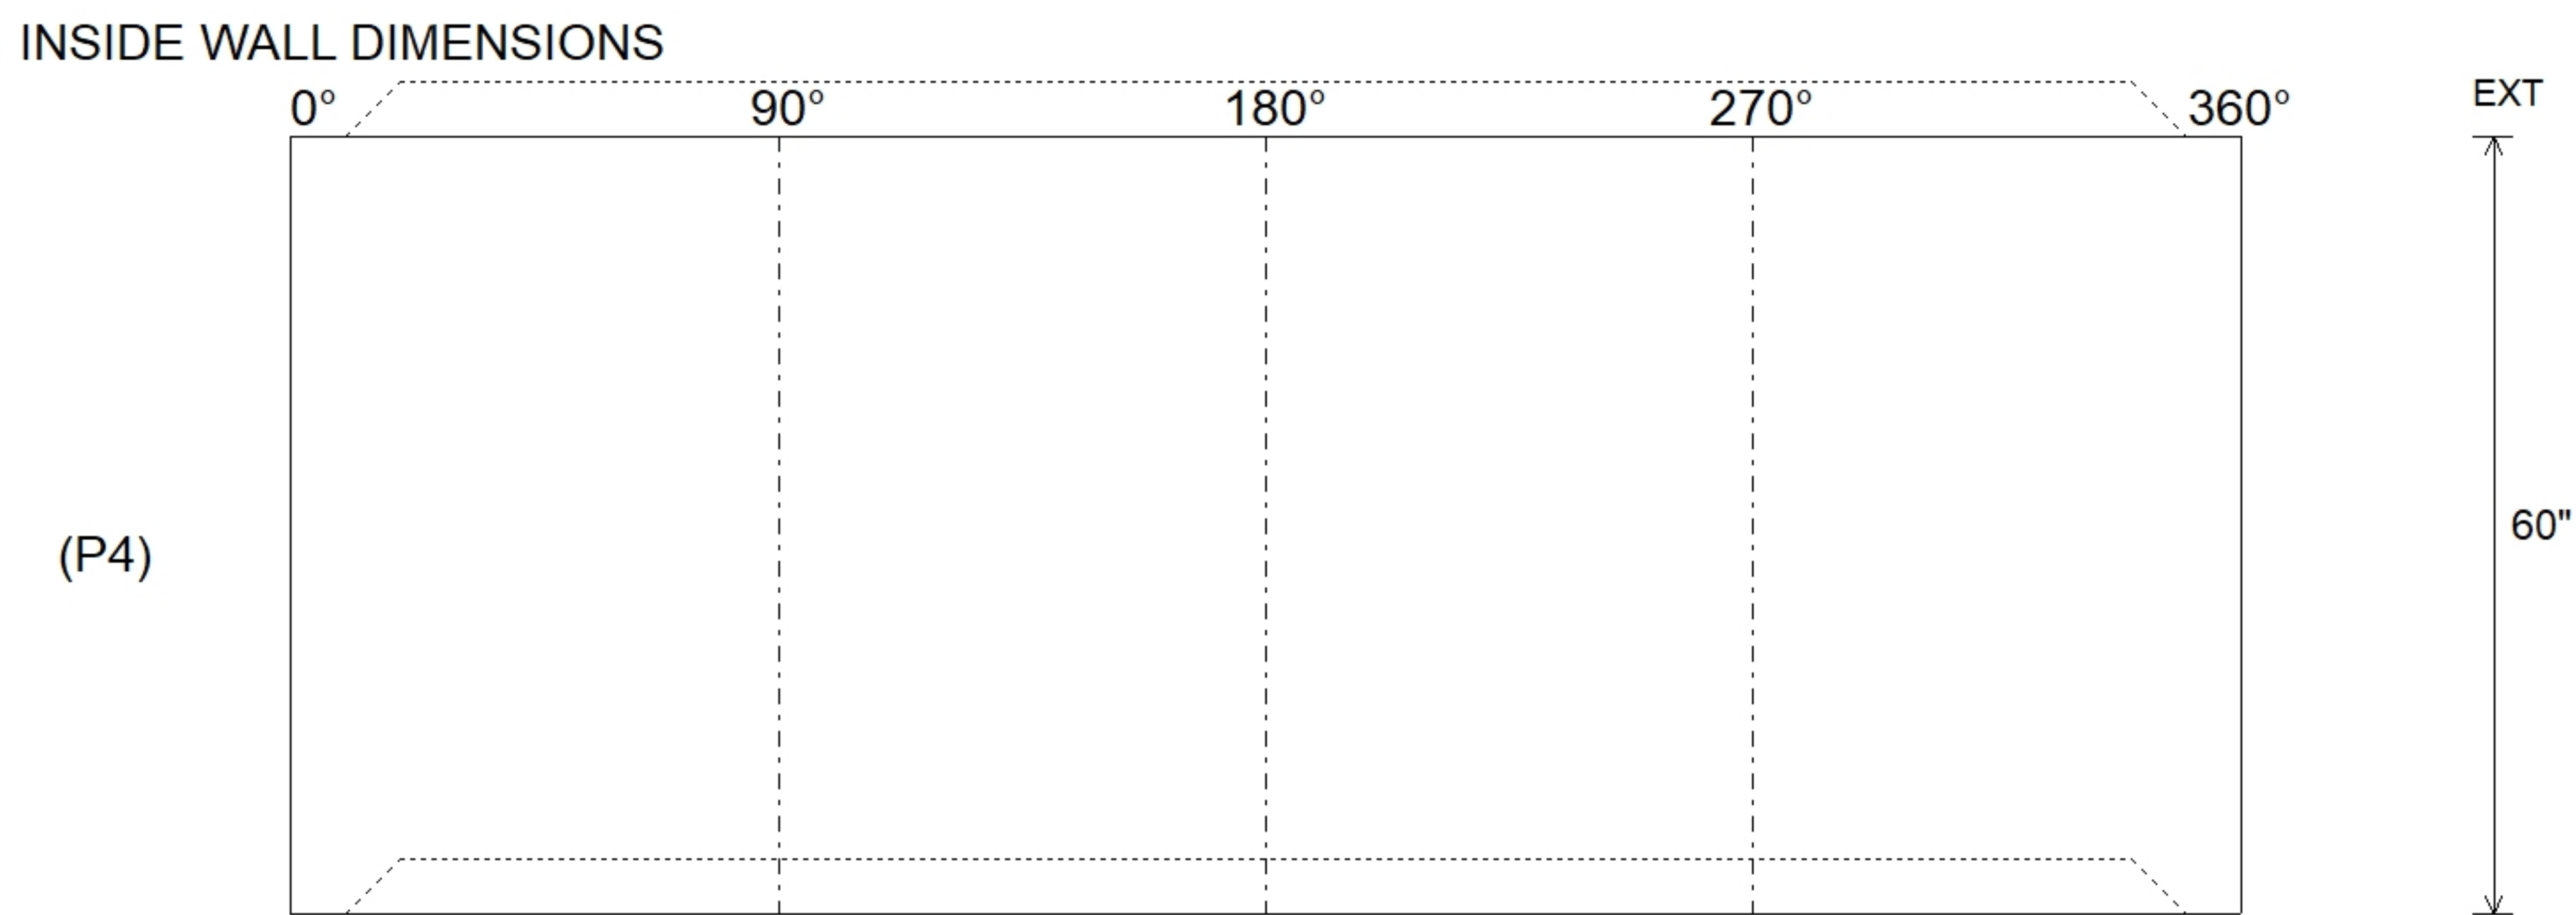


Job Name: 26-3849 ADS Take 5 Oil Job Location: Jackson, TN Contractor: ADS Advanced Drainage Systems, Inc.					Plant: Beaver Dam 10/13/2026 8:37:38 AM		Tech: S. Felletter PC: M. Sullivan						
Structure ID: A4													
P4		MH048RS60S		MH RISER SPECIAL T/G									
P6) 24" - CASTING HEIGHT - 7" P5) 48" - MH FLAT LID w/24" Center Hole F/G - 12" P4) 48" - MH RISER SPECIAL T/G - 60" P3) 48" - MH RISER SPECIAL T/G - 60" P2) 48" - MH RISER SPECIAL T/G - 24" P1) 48" - MH BASE T/n - 24" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) ASSEMBLY REQUIRED 1) CASTING - HOE MCB-375-B F/Bar Grt 4) 48" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 1) Hole - 24 1) Hole - 20 1) Hole - 18						0 lb 1580 lb 4192 lb 3750 lb 1677 lb 3007 lb 0 lb 0 lb 0 lb 250 lb 0 lb 0 lb 0 lb 0 lb 0 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MCB-375-B F/C "STORM"). 4. LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE. 5. P2 & P3 RISERS TO BE MECHANICALLY ATTACHED PRIOR TO INTERNAL INSTALLATION/DELIVERY. . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 416.06'		Rim to Invert: 8.87'		Slack: 0.68"		Sump: 81.24"		Structure Total: 14455 lb Step Position: 0°					
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (┘)	Offset			
Invert 1													
Invert 2													
Invert 3													
Invert 4													
Invert 5													
Invert 6													
Invert 7													
Invert 8													
RIGHT-SIDE UP VIEW (int. dimensions)													
													
				INSIDE WALL DIMENSIONS									
													
Coating (Int): Coating (Ext):				Seam Up: Tongue Seam Dn: Groove		Wall Thickness: 5" Floor Height: 0"		Height (Int): 60" Height (Ext): 60"		Weight (Net): 4192 lb Volume (Net): 1.07cu.yd			