



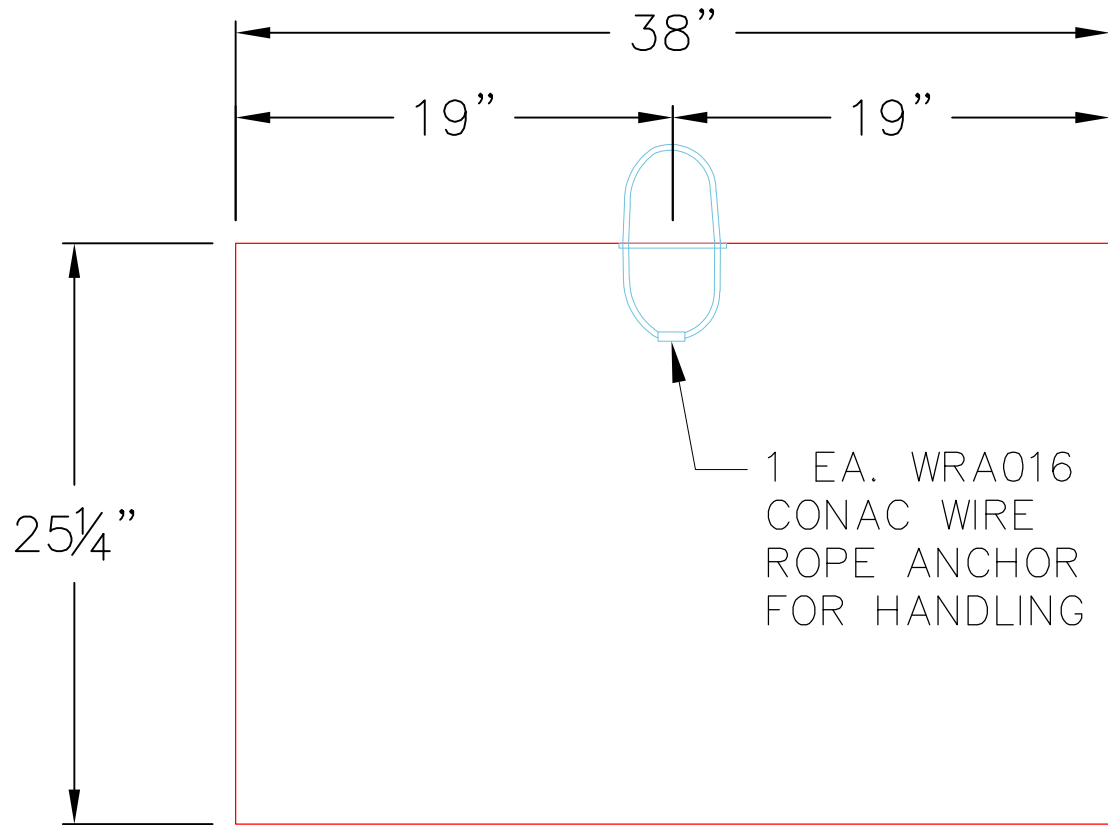

**PLAN VIEW**

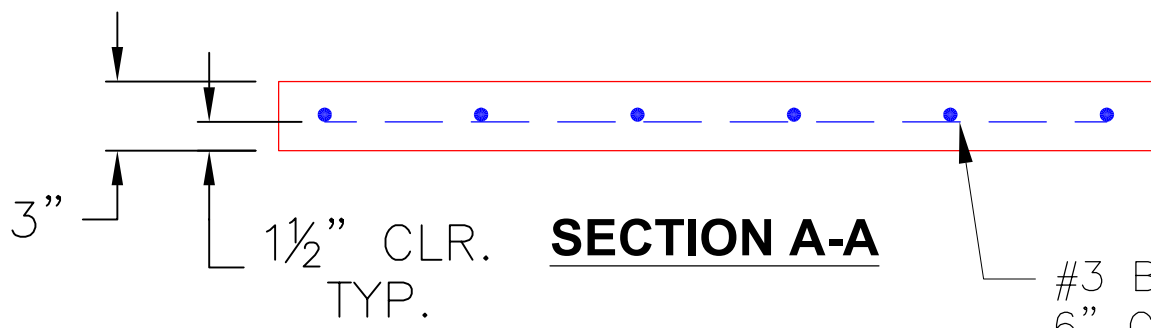

**SECTION A-A**

**GENERAL NOTES:**

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS.
3. REINFORCING: PER ASTM A615. (GRADE 60).
  - BASE #3 BAR @ 6" O.C.E.W. - 1 1/2" MIN. REBAR CLEARANCE (TYP)
5. WEIGHT: 241 LBS

#3 BAR @  
6" C.C.E.W.  
(GRADE 60)

|                                                                                    |                                                      |                             |                                                   |            |                     |
|------------------------------------------------------------------------------------|------------------------------------------------------|-----------------------------|---------------------------------------------------|------------|---------------------|
| PRODUCTION WORK ORDER                                                              |                                                      | PRODUCT I.D.:<br>CVW        | DESCRIPTION:<br>38" X 3" X 25 1/4" TALL WEIR WALL |            |                     |
|  | QUALITY CONTROL CHECKLIST                            | PRODUCT VIEW: RIGHT SIDE UP | CUSTOMER: CONVERGENT WATER TECHNOLOGIES           |            |                     |
|                                                                                    | <input type="checkbox"/> ALL DIMENSIONS CORRECT.     | PLANT: BEAVER DAM, KY.      | PROJECT: WEST FRANKLIN PARK P02818                |            |                     |
|                                                                                    | <input type="checkbox"/> LIFTERS INSTALLED.          | WEIGHT: 241 LBS.            | STRUCTURE: C3.1.2                                 |            |                     |
|                                                                                    | <input type="checkbox"/> HOLE LOCATION(S) CORRECT.   | TOP SECTION JOINT: N/A      | ORDER NO: 26-3904                                 |            |                     |
|                                                                                    | <input type="checkbox"/> REINFORCING CORRECT.        | BASE SECTION JOINT: N/A     | PC: C. GOFF                                       |            | DRAWING: J. HORSLEY |
|                                                                                    | <input type="checkbox"/> SURFACE QUALITY ACCEPTABLE. | QC CHECK INITIALS:          | DATE: 10/07/26                                    | SCALE: NTS | PG. 1 of 1          |
|                                                                                    | <input type="checkbox"/> EDGES CHAMFERED.            |                             |                                                   |            |                     |
| <input type="checkbox"/> ALL PATCHWORK ACCEPTABLE.                                 |                                                      |                             |                                                   |            |                     |