




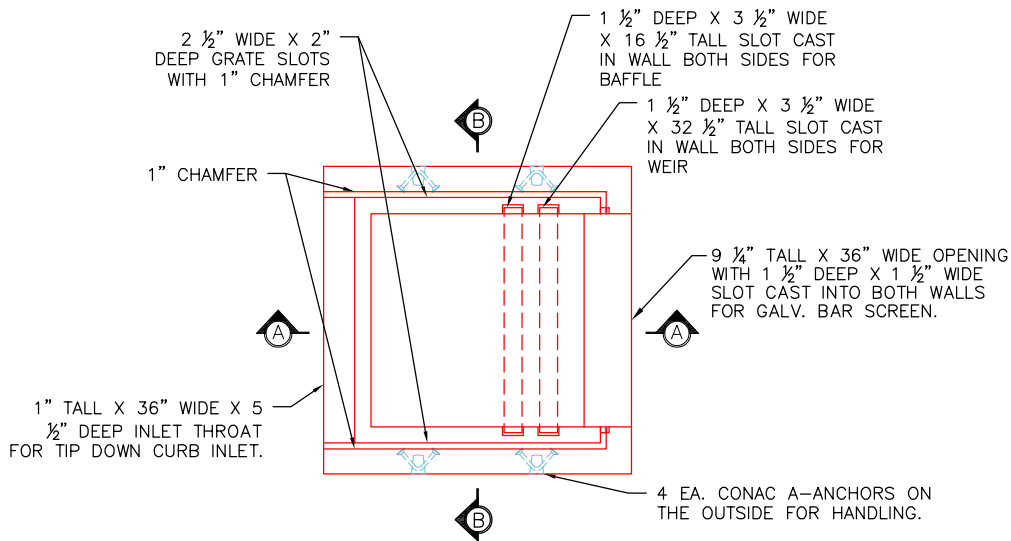

PLAN VIEW

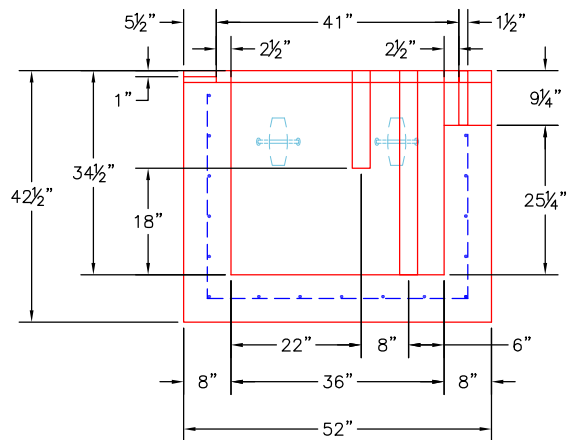

SECTION A-A

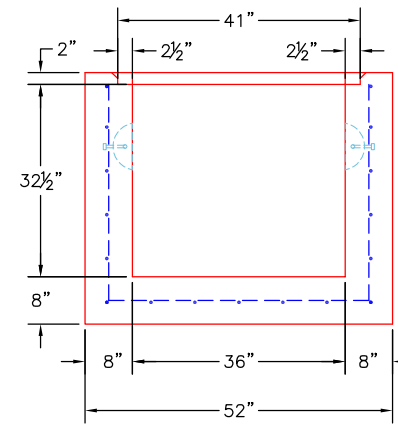

SECTION B-B

# GENERAL NOTES:

1. MANUFACTURED PER ASTM C-913 (LATEST REVISION).
2. CONCRETE : 5,000 PSI AT 28 DAYS.
3. REINFORCING: PER ASTM 615 (GRADE 60).
  - TOP SLAB (As. 62) #5 BAR @ 6" C.C.E.W.
  - WALLS/FLOOR (As. 12) #5 BAR @ 12" C.C.E.W.
4. WEIGHTS: TOTAL = 4,305 LBS
  - BASE = 3,924 LBS.
  - WEIR = 241 LBS
  - BAFFLE = 140 LBS
5. 41" X 41" X 1.25" GALV. BAR GRATE BY ICAST.
6. 1.25" X 7" X 39" GALV. BAR SCREEN BY ICAST.
7. VERIFY ALL ASPECTS OF DESIGN.

## REVISIONS

|  |  |
|--|--|
|  |  |
|  |  |
|  |  |
|  |  |



|                                         |                      |            |
|-----------------------------------------|----------------------|------------|
| SUBMITTAL DRAWING: 36" X 36" PRETX LT   |                      |            |
| CUSTOMER: CONVERGENT WATER TECHNOLOGIES |                      |            |
| PROJECT: GALLATIN PRETX                 |                      |            |
| STRUCTURE ID.:                          |                      |            |
| QUOTE/SALES ORDER NO: 26-3904           |                      |            |
| PC C. GOFF                              | DRAWN BY: J. HORSLEY |            |
| DATE: 10/7/26                           | SCALE: NTS           | PG. 1 of 1 |