
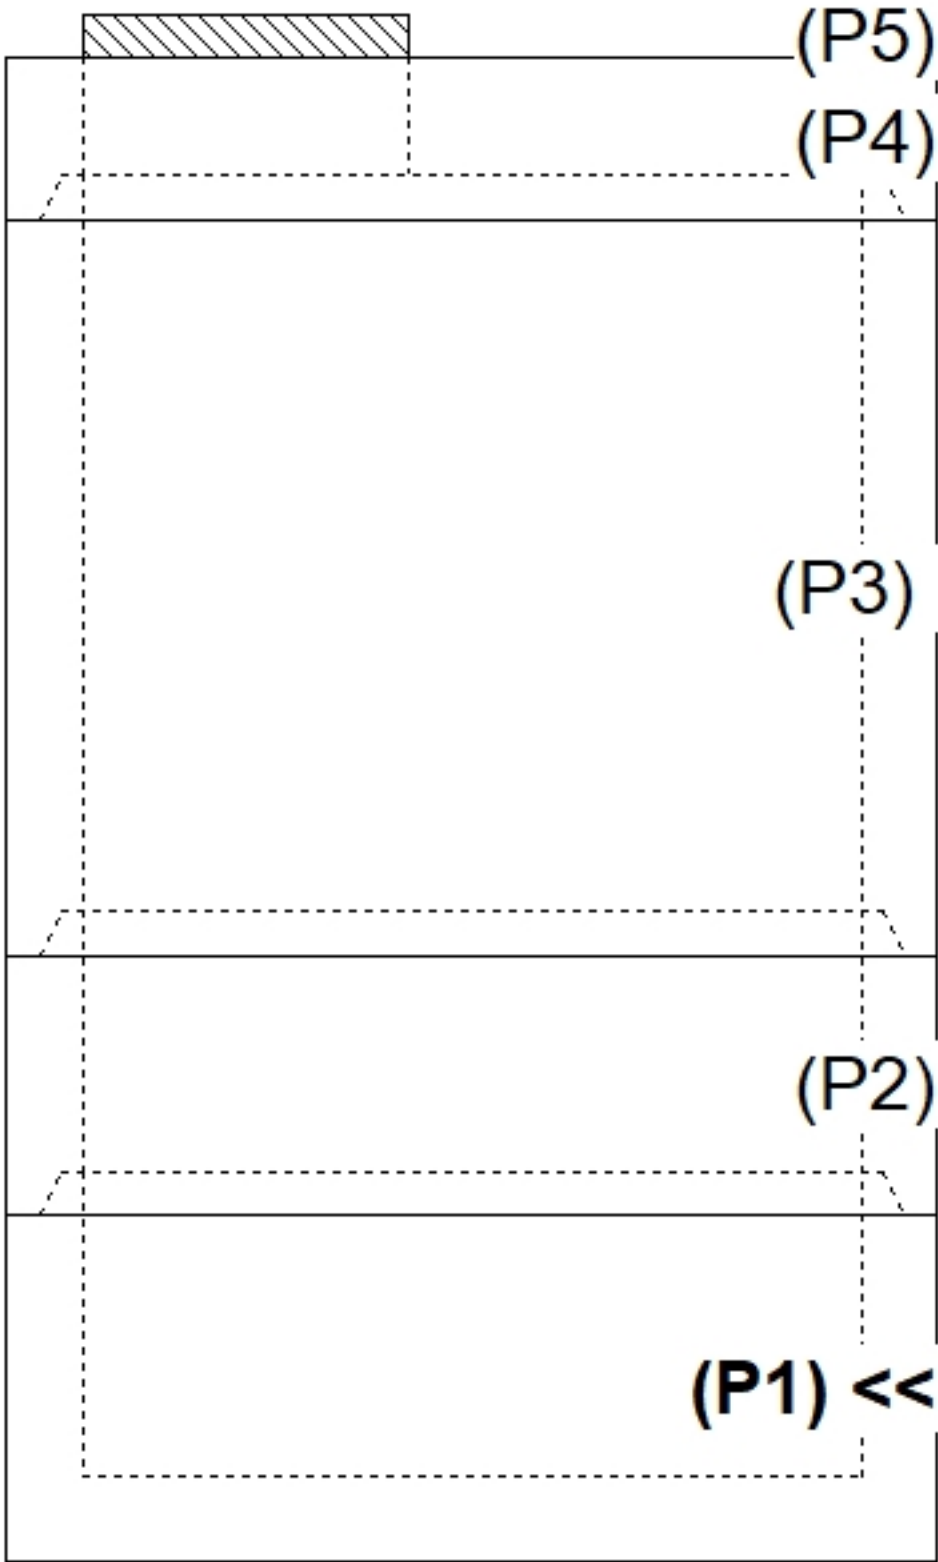
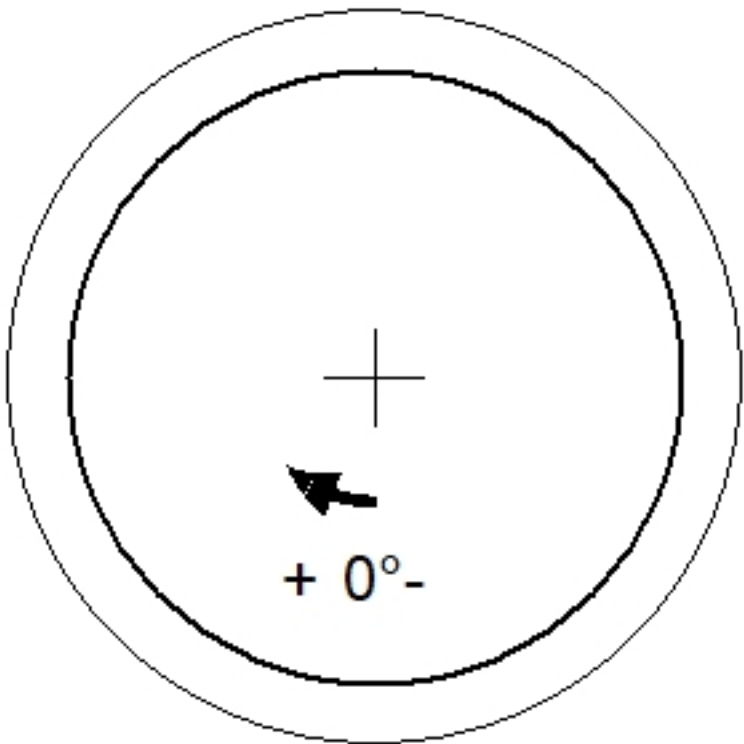


Job Name: 26-3958 908730 Summit View Farms 6th Plat Job Location: Lees Summit, MO Contractor: Contech Engineering Solutions					Plant: Beaver Dam 10/15/2026 9:40:02 AM		Tech: S. Felletter PC: C. Goff				
Structure ID: 10-CS-6											
P1			MH072BA24			MH BASE T/n					
P5) 30" - CASTING HEIGHT - 4" P4) 72" - MH FLAT TOP SPEC. (30" ECC HOLE) F/G - 15" P3) 72" - MH RISER Custom Ht T/G - 68" P2) 72" - MH RISER SPECIAL T/G - 24" P1) 72" - MH BASE T/n - 24" 1) ASSEMBLY REQUIRED 1) CVSTENCILING 3) 72" - Conseal CS-102 1.00" 2) Hole - 32						0 lb 4661 lb 8939 lb 3499 lb 7398 lb 0 lb 0 lb 0 lb 0 lb ----- 24497 lb		Structure Notes: . 4" CASTING BY OTHERS . LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE . ICAST TO INSTALL THE INTERNALS . CONTECH'S LOGO AS WELL AS THE INLET AND OUTLET MUST BE STENCILED ONTO THE STRUCTURE . P2 & P3 RISERS TO BE MECHANICALLY ATTACHED PRIOR TO INTERNAL INSTALLATION/DELIVERY			
Rim: 987.3'		Rim to Invert: 6.12'		Slack: 8.4"		Sump: 69.96"		Step Position: 0°			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (┘)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
						RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimenions) 					

INSIDE WALL DIMENSIONS

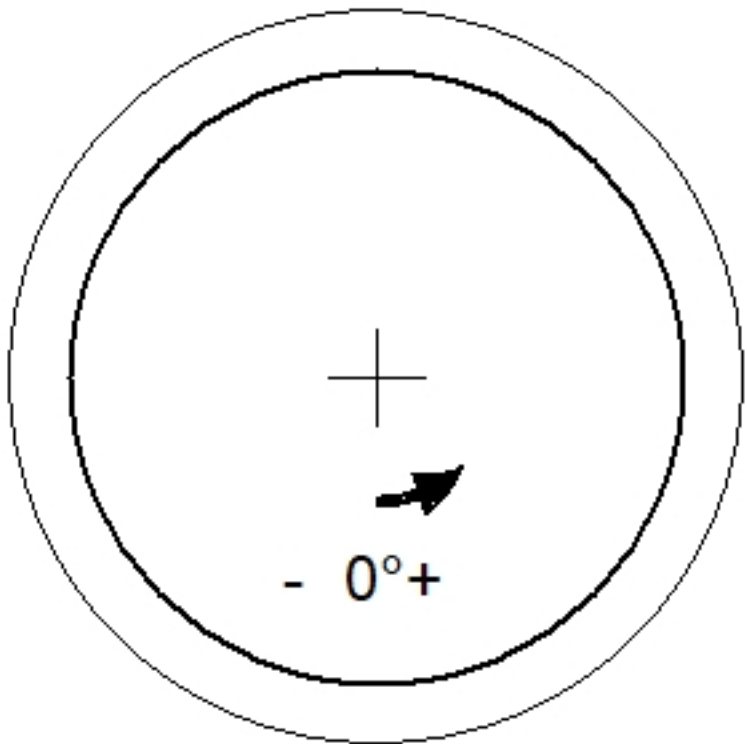