



Job Name: 25-1401 Irwin Landing Ph. 1 Job Location: Murfreesboro, TN Contractor: Bear Construction LLC					Plant: Beaver Dam 6/9/2026 10:37:21 AM		Tech: S. Felletter PC: Erica Bradley				
Structure ID: R37											
P1 BX28280606VH BOX BASE 6inW, 6inF, Variable Ht F/n											
P2) 28" x 28" - CASTING HEIGHT - 5" P1) 28" x 28" - BOX BASE 6inW, 6inF, Variable Ht F/n - 43" 1) 28" x 28" - STORM INVERT CHANNEL (FLAT) - 4" THK 1) CASTING - JBS 3104-V SINGLE SET 1) 28" x 28" - Conseal CS-102 1.00" 1) Hole - 26"					0 lb 3483 lb 450 lb 250 lb 0 lb 0 lb ----- 4183 lb Structure Total:		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (JBS-3104 SINGLE SET). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Rim: 589.09' Rim to Invert: 3.86' Slack: 0.82" Sump: 2.5" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1	585.23'	0°	20"	18" RCP B WALL	23"	Hole 26	26"	26"	0"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

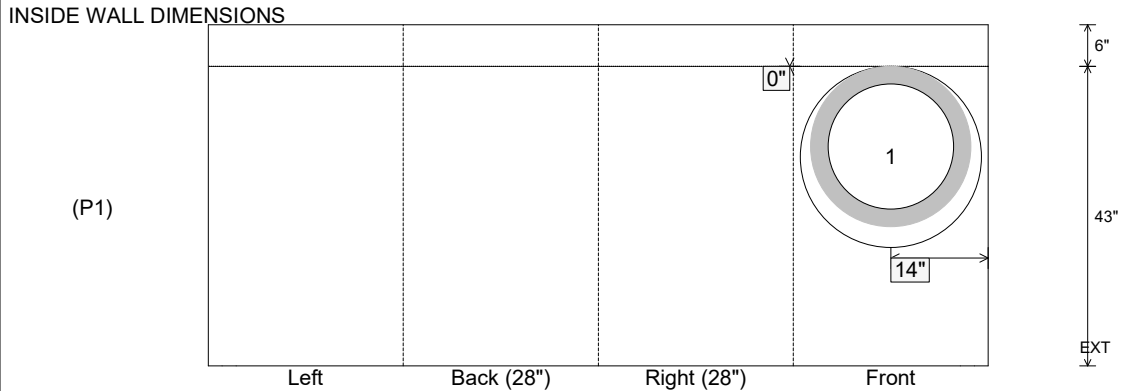

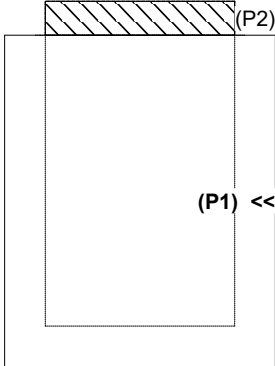


Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: n/a

Wall Thickness: 6"
Floor Height: 6"

Height (Int): 43"
Height (Ext): 49"

Weight (Net): 3483 lb
Volume (Net): 0.89cu.yd



Weight (Net): 3483 lb
Volume (Net): 0.89cu.yd