




Job Name: 25-1401 Irwin Landing Ph. 1 Job Location: Murfreesboro, TN Contractor: Bear Construction LLC					Plant: Beaver Dam 6/9/2026 10:37:12 AM		Tech: S. Felletter PC: Erica Bradley				
Structure ID: R25											
P1		BX2828-06BA42		BOX BASE 6inW, 6inF F/n							
P2) 28" x 28" - CASTING HEIGHT - 5" P1) 28" x 28" - BOX BASE 6inW, 6inF F/n - 42" 1) 28" x 28" - STORM INVERT CHANNEL (FLAT) - 4" THK 1) CASTING - JBS 3104-V SINGLE SET 1) 28" x 28" - Conseal CS-102 1.00" 1) Hole - 26"					0 lb 3414 lb 450 lb 250 lb 0 lb 0 lb ----- 4114 lb Structure Total:		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (JBS-3104 SINGLE SET). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Rim: 574.67' Rim to Invert: 3.79' Slack: 0.98" Sump: 2.5" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1	570.88'	0°	20"	18" RCP B WALL	23"	Hole 26	26"	26"	0"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											




Invert: 1
Degree: 0°
Horz: 14"
Hole: 26"
Up(_): 0"



Invert: 1
Degree: 0°
Horz: 14"
Hole: 26"
Up(_): 0"

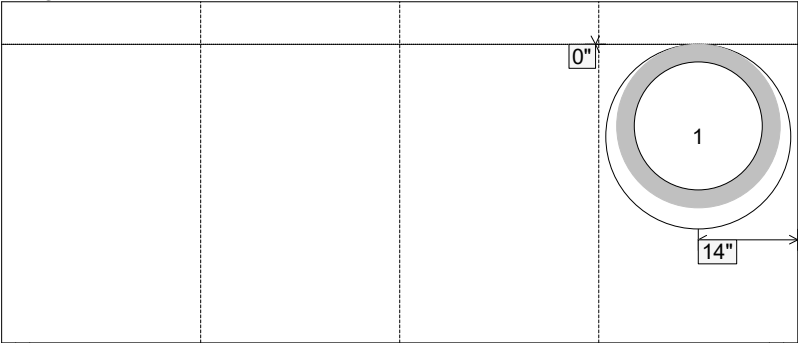

Left Back (28") Right (28") Front

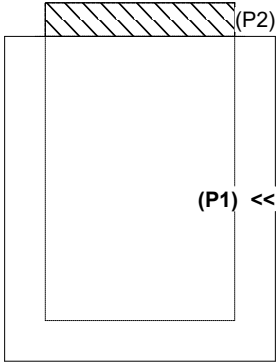

(P1) << (P2)

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 6" Floor Height: 6"	Height (Int): 42" Height (Ext): 48"	Weight (Net): 3414 lb Volume (Net): 0.87cu.yd
----------------------------------	-------------------------------	--	--	--

Job Name: 25-1401 Irwin Landing Ph. 1

Job Location: Murfreesboro, TN

Contractor: Bear Construction LLC

Plant: Beaver Dam

6/9/2026 10:37:12 AM

Tech: S. Felletter

PC: Erica Bradley



Structure ID: R25

P1 BX2828-06BA42

BOX BASE 6inW, 6inF F/n

P2) 28" x 28" - CASTING HEIGHT - 5"

P1) 28" x 28" - BOX BASE 6inW, 6inF F/n - 42"

1) 28" x 28" - STORM INVERT CHANNEL (FLAT) - 4" THK

1) CASTING - JBS 3104-V SINGLE SET

1) 28" x 28" - Conseal CS-102 1.00"

1) Hole - 26

0 lb

3414 lb

450 lb

250 lb

0 lb

0 lb

0 lb

Structure Total: 4114 lb

Structure Notes:

1. PER ASTM C913 SPECIFICATIONS.

2. CONCRETE = 4,000 PSI AT 28 DAYS.

3. CASTING BY ICAST (JBS-3104 SINGLE SET).

REINFORCING PER ASTM A615 (GRADE 60).

- WALLS (As .31) #5 BARS AT 12" C.C.E.W.

- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Invert channel drawing

4" Thick flat storm invert

Rim: 574.67'

Rim to Invert: 3.79'

Slack: 0.98"


Sump: 2.5"

Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1	570.88'	0°	20"	18" RCP B WALL	23"	Hole 26	26"	26"	0"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimenions)




Invert: 1
Degree: 0°
Horz: 14"
Hole: 26"
Up(_): 0"



Invert: 1
Degree: 0°
Horz: 14"
Hole: 26"
Up(_): 0"

INSIDE WALL DIMENSIONS

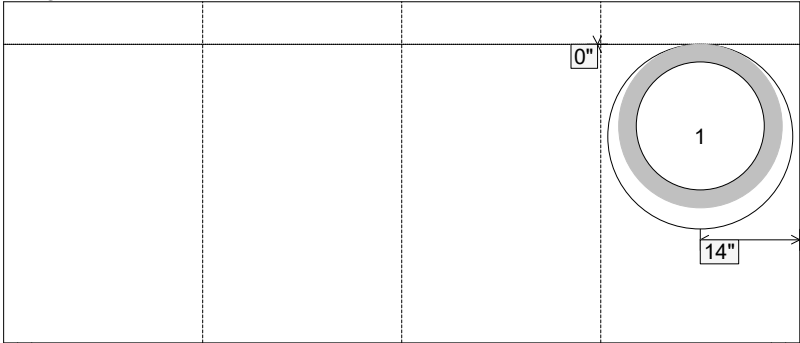

6"
42"
14"
0"

LeftBack (28")Right (28")Front

Coating (Int):

Coating (Ext):

Seam Up: Flat

Seam Dn: n/a

Wall Thickness: 6"

Floor Height: 6"

Height (Int): 42"

Height (Ext): 48"

Weight (Net): 3414 lb

Volume (Net): 0.87cu.yd