
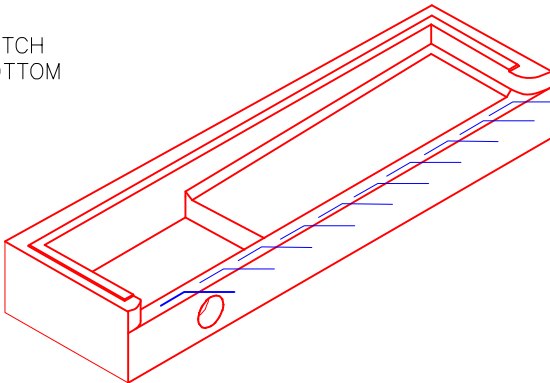




KYTC STATE PRODUCT

GENERAL NOTES:

- 1. MANUFACTURED PER KYTC SPECIFICATIONS
- 2. CONCRETE F'C = 4,500 PSI AT 28 DAYS.
- 3. REINFORCING: #5 BAR @ 12" C/C E.W. (GRADE 60)
- 4. TOP PHASE OVERALL HEIGHT NOT TO EXCEED 28"
- 5. REBAR EXTENSIONS TO BE CAPPED AFTER BEING BENT.

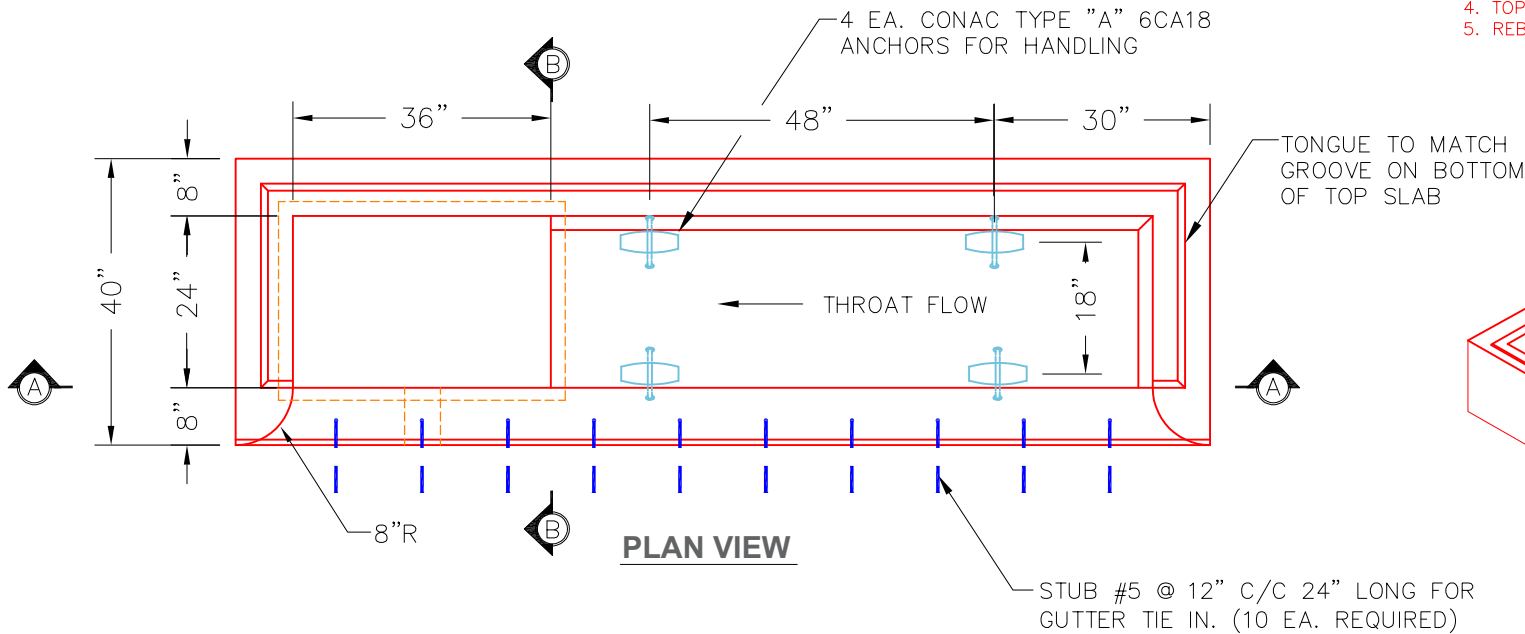

ISOMETRIC VIEW
(LEFT HAND ORIENTATION)

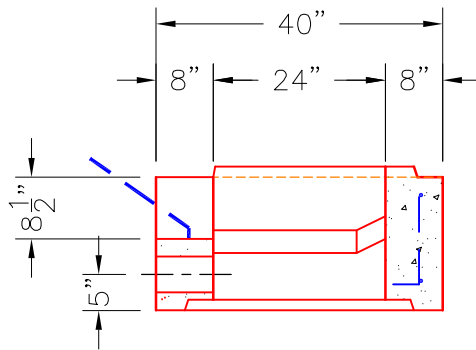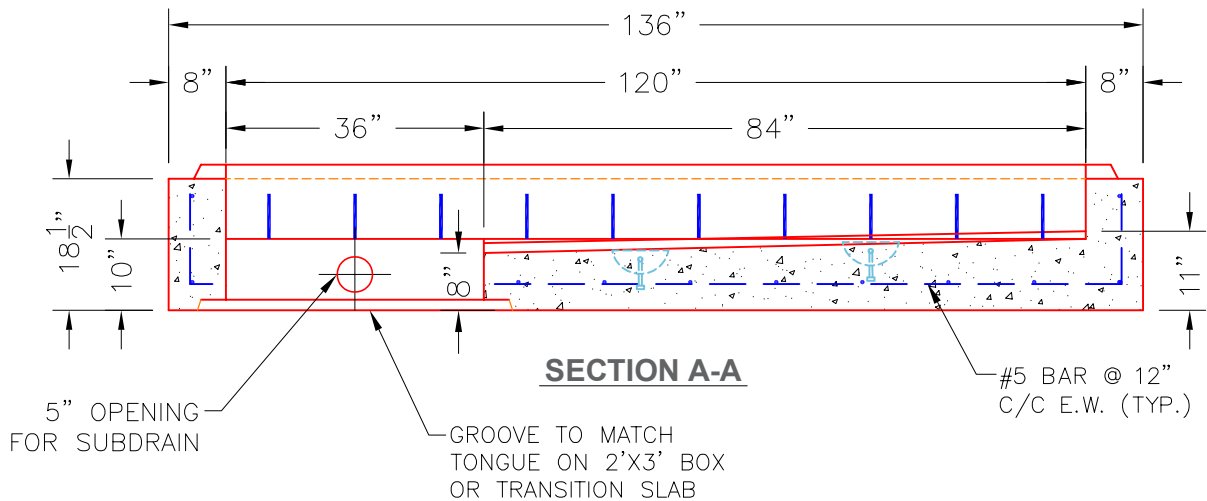

PRODUCTION WORK ORDER

PRODUCT I.D.: CBITA-10BL

DESCRIPTION: KYTC 10' CBI-TYPE A TOP PHASE BOTTOM (LEFT)

QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ SUBDRAIN HOLE CORRECT.
- ☐ REINFORCING CORRECT.
- ☐ EXTENDED REBAR INSTALLED.
- ☐ KYTC THROAT CORRECT.
- ☐ ALL PATCHWORK ACCEPTABLE.

PRODUCT VIEW: RIGHT SIDE UP

PLANT: BEAVER DAM, KY.

WEIGHT: 5,270 LBS.

TOP JOINT: SHIP-LAP TONGUE

BOTTOM JOINT: N/A

QC CHECK INITIALS:

CUSTOMER: STOCK

PROJECT: STOCK

STRUCTURE ID.: N/A

SALES ORDER NO: N/A

CHECK: J.H. ROSS, PE

DRAWING: N. RICHARDS

DATE: 06/19/23

SCALE: NTS

PG. 1 of 1

