



NOTES:

1. MANUFACTURED TO KYTC SPECIFICATIONS.
2. CONCRETE f'_c = 4,500 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" C/C E.W. (GRADE 60)
4. J.R. HOE KY-206 FRAME & COVER TO BE CAST IN TOP.
5. LIGHT BRUSH FINISH REQUIRED ON TOP.

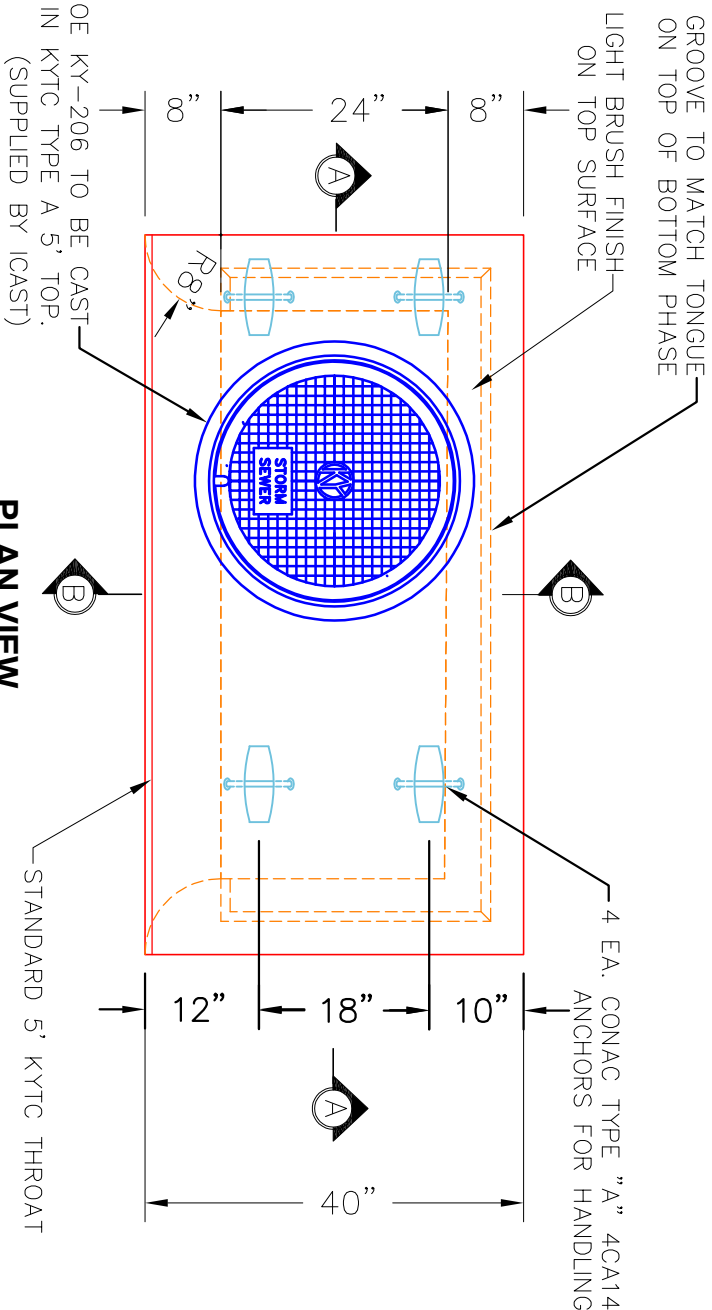


PLAN VIEW

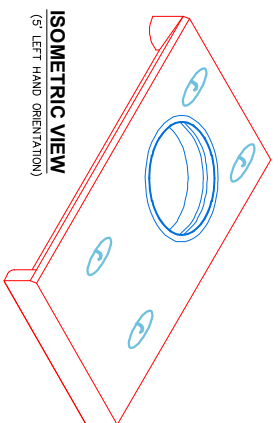

ISOMETRIC VIEW
(5' LEFT HAND ORIENTATION)


SEE STANDARD
DETAIL

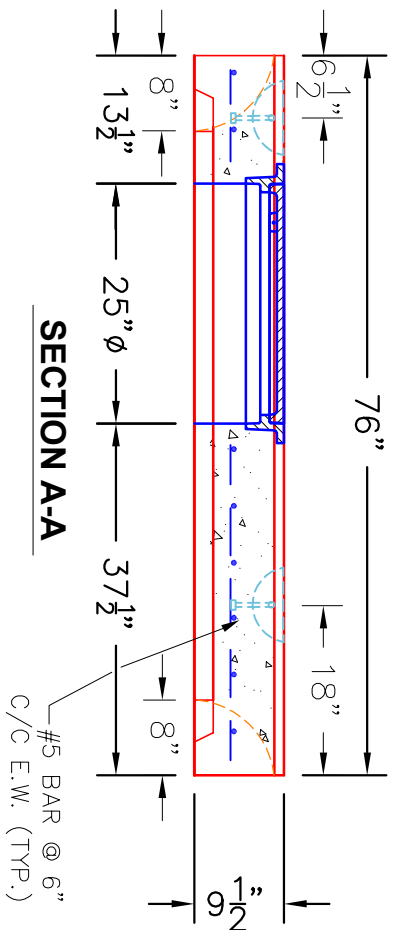

SECTION A-A

#5 BAR @ 6"
C/C E.W. (TYP.)

STANDARD CURB
DETAIL

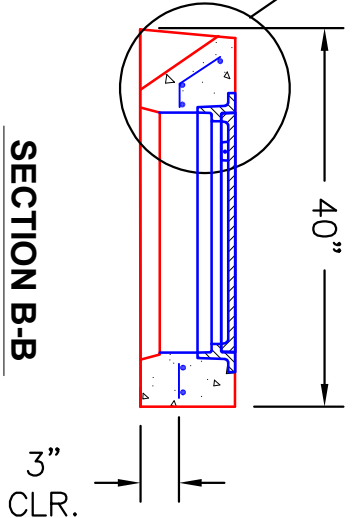

SECTION B-B

3"
CLR.

PRODUCTION WORK ORDER

	QUALITY CONTROL CHECKLIST		PRODUCT VIEW: RIGHT SIDE UP		CUSTOMER: STOCK	
	☐ ALL DIMENSIONS CORRECT.		PLANT: BEAVER DAM, KY.		PROJECT: STOCK	
	☐ LIFTERS INSTALLED.		WEIGHT: 1,832 LBS.		STRUCTURE ID.: STOCK	
	☐ CASTING AT CORRECT LOCATION.		TOP SECTION JOINT: N/A		SALES ORDER NO: N/A	
	☐ REINFORCING CORRECT.		BOTTOM SECTION JOINT: SHIP-LAP GROOVE		CHK.: J.H. ROSS, PE	
	☐ LIGHT BRUSH FINISH ACCEPTABLE.		QC CHECK INITIALS:		DRAWING: N. RICHARDS	
	☐ KYTC THROAT CORRECT.		DATE: 04/10/24		SCALE: NTS	
	☐ ALL PATCHWORK ACCEPTABLE.				PG. 1 of 1	