



THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.
LATEST REVISION 3-14-23

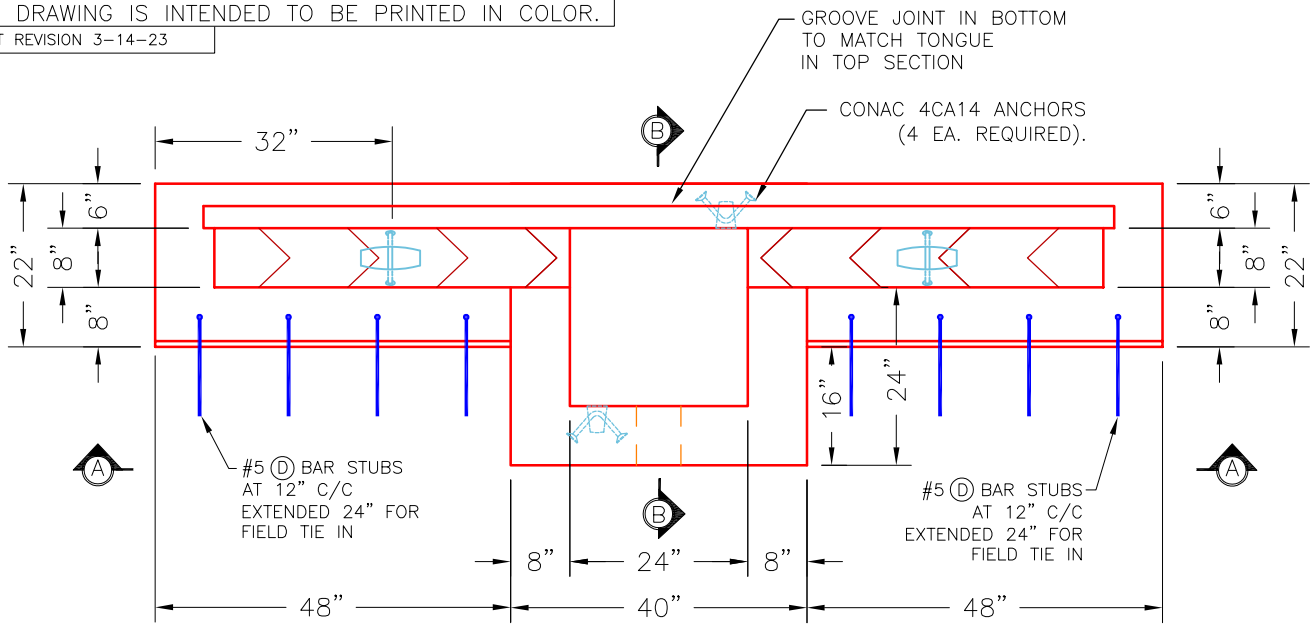

PLAN VIEW

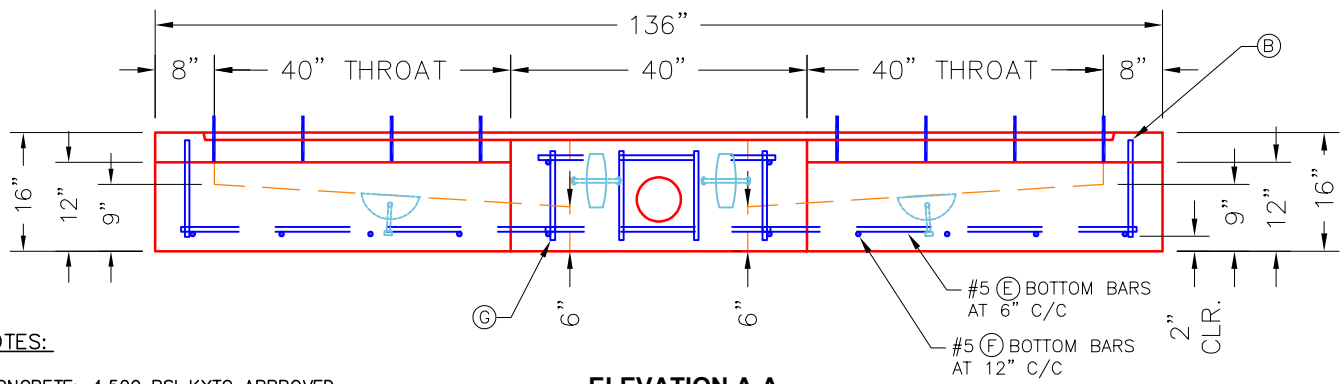


ELEVATION A-A

REINFORCING CUT LIST

BAR	QTY.	MATERIAL	LENGTH	SHAPE	TOTAL WEIGHT
(A)	6	#5 BAR	34"	STR.	18 LBS.
(B)	12	#5 BAR	12"	STR.	12 LBS.
(C)	3	#5 BAR	132"	STR.	34 LBS.
(D)	8	#5 BAR	29"	BENT	16 LBS.
(E)	8	#5 BAR	52"	STR.	36 LBS.
(F)	8	#5 BAR	18"	STR.	13 LBS.
(G)	4	#5 BAR	12"	STR.	4 LBS.

KYTC STATE PRODUCT

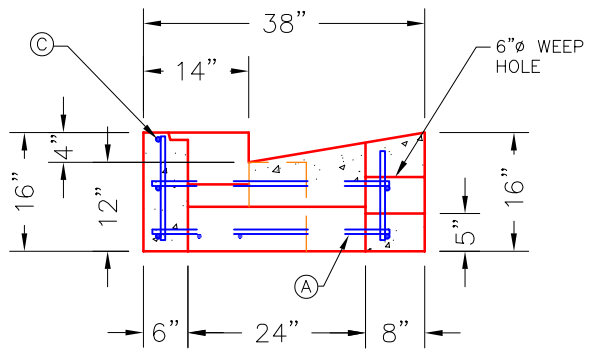

SECTION B-B

~NOTES:

1. CONCRETE: 4,500 PSI KYTC APPROVED.
2. REINFORCING: #5 BAR-SEE CHART (GRADE 60)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. LIFTING ANCHOR POCKETS TO BE GROUTED AFTER SETTING BY CONTRACTOR.
5. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWINGS
RDB-280-06, RDB-281-03, RDB-282-04, RDB-283-04, RDB-400-05,
RDB-410-06, RDB-420-05 AND THE STANDARD SPECIFICATIONS FOR ROAD
AND BRIDGE CONSTRUCTION.
6. 3/8" CHAMFER ON ALL EXPOSED EDGES.

PRODUCTION WORK ORDER		PRODUCT I.D.: CBITB10-BS	DESCRIPTION: KYTC CBI B 10' TOP PHASE BOTTOM (SAG)	
	QUALITY CONTROL CHECKLIST		PRODUCT VIEW: RIGHT SIDE UP	
	☐ ALL DIMENSIONS CORRECT.		CUSTOMER: STOCK	
	☐ LIFTERS INSTALLED.		PROJECT: STOCK	
	☐ CASTING AT CORRECT LOCATION.		STRUCTURE ID.: N/A	
	☐ REINFORCING CORRECT.		SALES ORDER NO.: N/A	
	☐ LIGHT BRUSH FINISH ACCEPTABLE.		PC: J.H. ROSS, P.E. DRAWING: N. RICHARDS	
☐ KYTC STANDARD THROAT CORRECT.		DATE: 02/14/23		SCALE: NTS PG. 1 of 1
☐ ALL PATCHWORK ACCEPTABLE.		QC CHECK INITIALS:		