
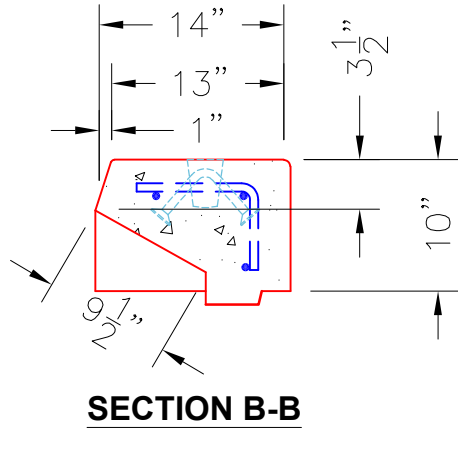
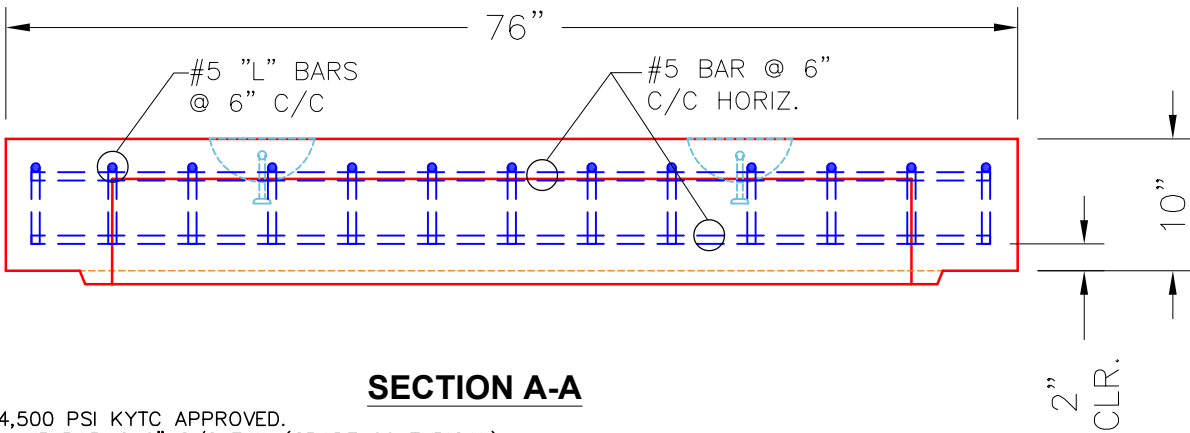
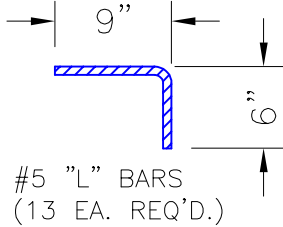


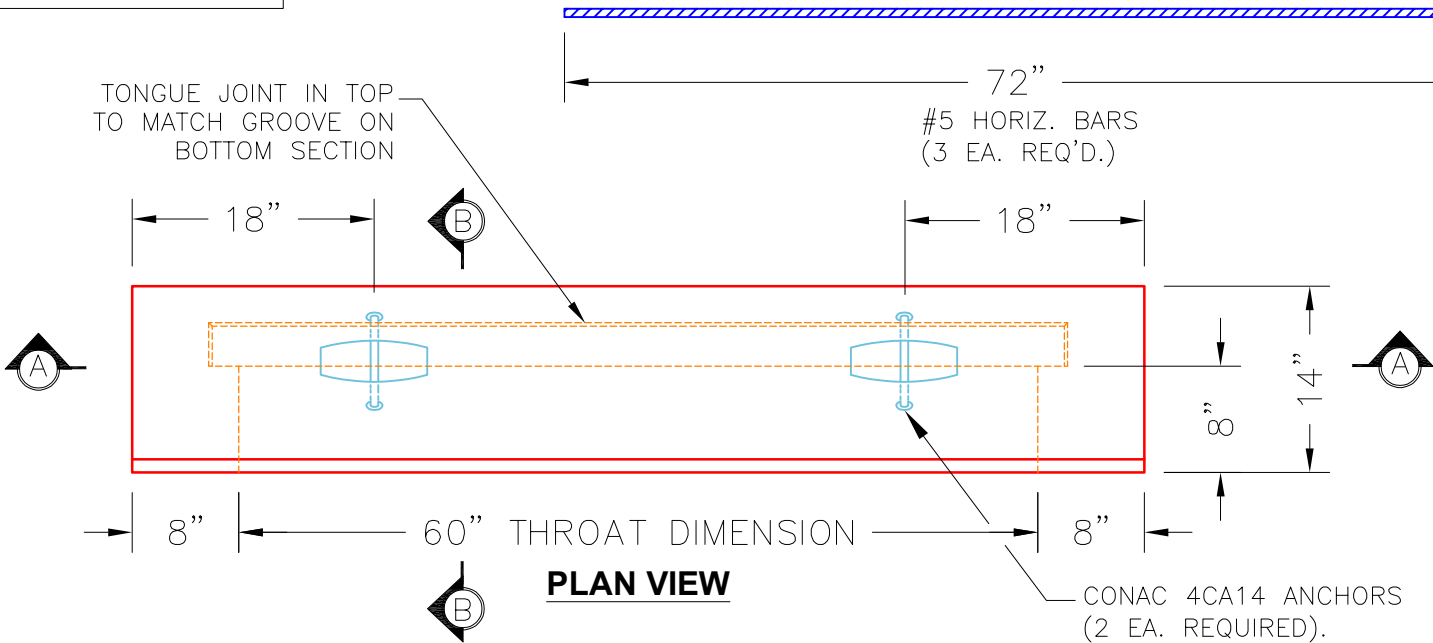

~NOTES:

1. CONCRETE: 4,500 PSI KYTC APPROVED.
2. REINFORCING: #5 BAR @ 6" C/C E.W. (GRADE 60 TYPICAL)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. LIFTING ANCHOR POCKETS TO BE GROUTED AFTER SETTING BY CONTRACTOR.
5. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWINGS RDB-280-06, RDB-281-03, RDB-282-04, RDB-283-04, RDB-400-05, RDB-410-06, RDB-420-05 AND THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.

SECTION A-A

SECTION B-B

KYTC STATE PRODUCT

PRODUCTION WORK ORDER		PRODUCT I.D.: CBIB5-T	DESCRIPTION: KYTC CBI B 5' TOP PHASE TOP (STANDARD)		
	QUALITY CONTROL CHECKLIST		PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER: STOCK	
	☐ ALL DIMENSIONS CORRECT.		PLANT: BEAVER DAM, KY.	PROJECT: STOCK	
	☐ LIFTERS INSTALLED.		WEIGHT: 720 LBS.	STRUCTURE ID.: N/A	
	☐ CASTING AT CORRECT LOCATION.		TOP JOINT: N/A	SALES ORDER NO.: N/A	
	☐ REINFORCING CORRECT.		BOTTOM JOINT: SHIP-LAP TONGUE	PC: J.H. ROSS, P.E.	DRAWING: N. RICHARDS
	☐ LIGHT BRUSH FINISH ACCEPTABLE.		QC CHECK INITIALS:	DATE: 03/14/23	SCALE: NTS
☐ KYTC STANDARD THROAT CORRECT.					PG. 1 of 1
☐ ALL PATCHWORK ACCEPTABLE.					