
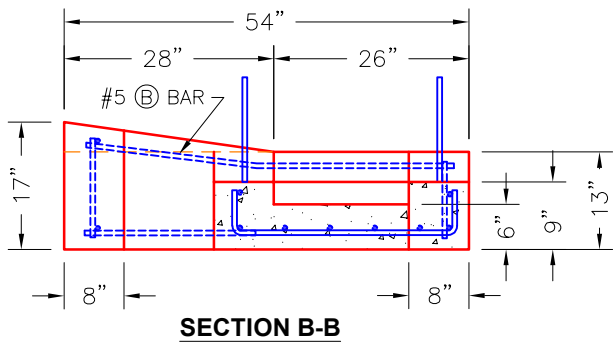
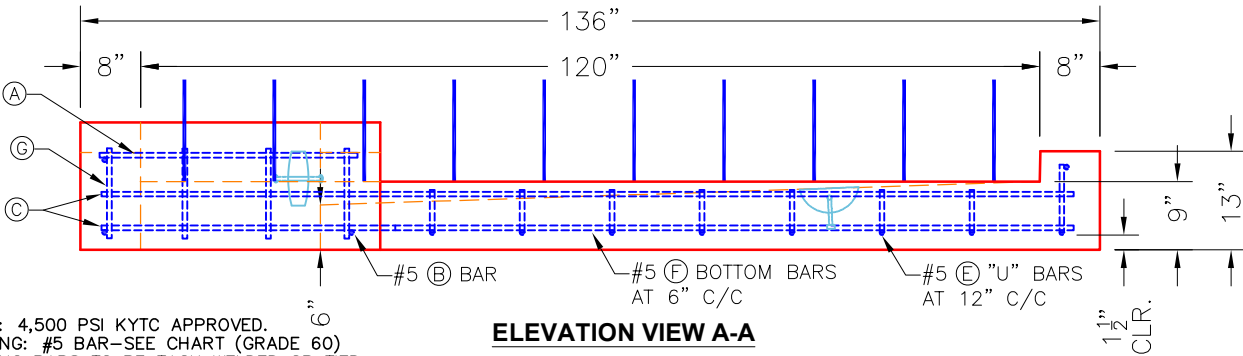
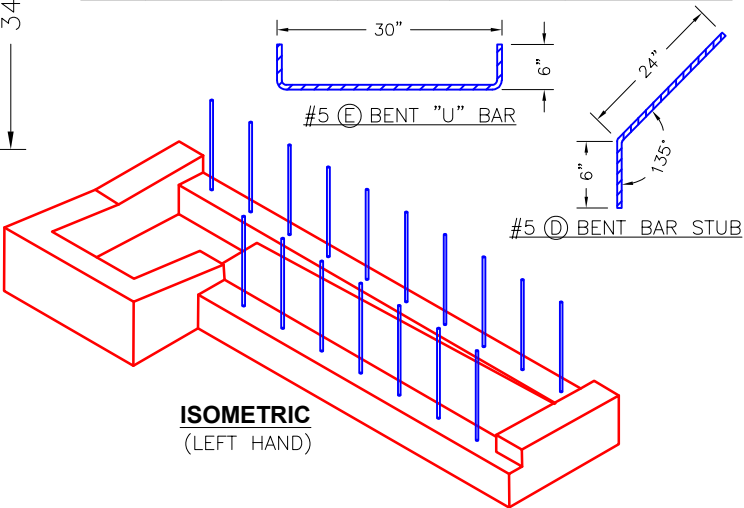


KYTC STATE PRODUCT

REINFORCING CUT LIST

BAR	QTY.	MATERIAL	LENGTH	SHAPE	TOTAL WEIGHT
(A)	3	#5 BAR	34"	STR.	9 LBS.
(B)	2	#5 BAR	48"	STR.	8 LBS.
(C)	3	#5 BAR	132"	STR.	34 LBS.
(D)	17	#5 "L" BAR	30"	BENT	44 LBS.
(E)	8	#5 "U" BAR	42"	BENT	30 LBS.
(F)	5	#5 BAR	100"	STR.	44 LBS.
(G)	8	#5 BAR	12"	STR.	8 LBS.

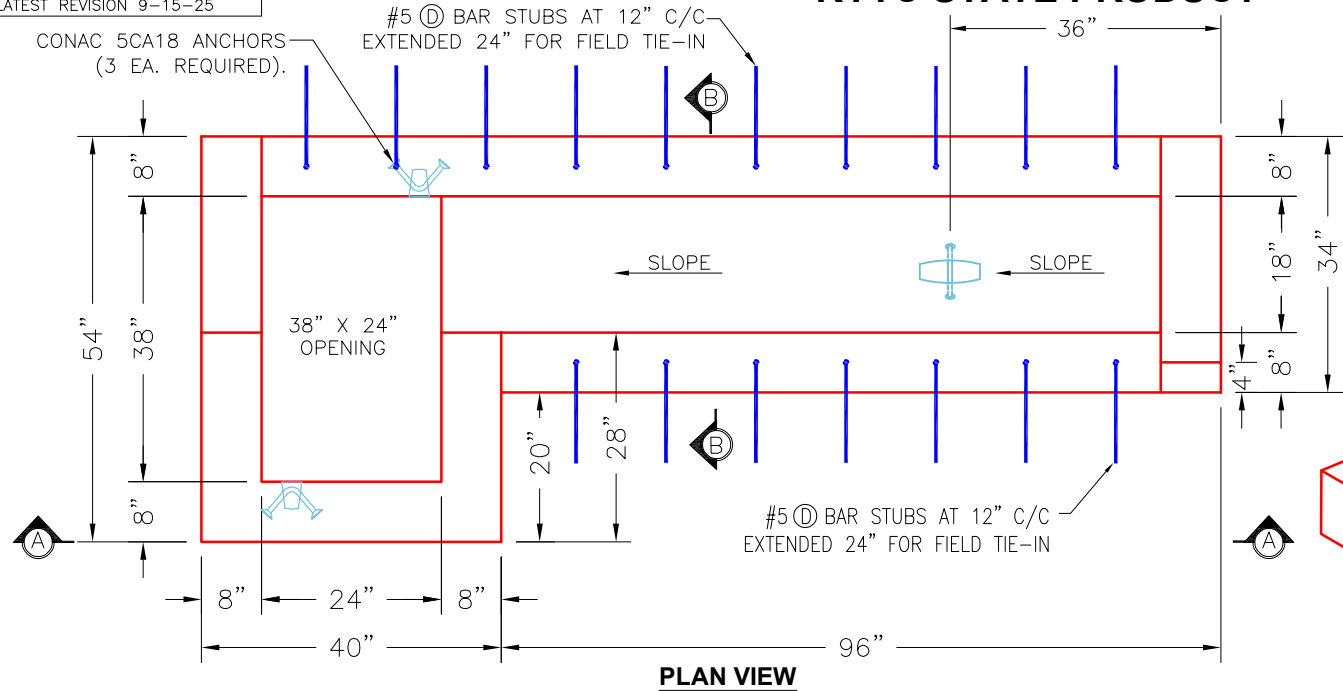

~NOTES:

1. CONCRETE: 4,500 PSI KYTC APPROVED.
2. REINFORCING: #5 BAR-SEE CHART (GRADE 60)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. LIFTING ANCHOR POCKETS TO BE GROUTED AFTER SETTING BY CONTRACTOR.
5. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWINGS RDB-230-09, RDB-231-11, RDB-240-02, AND THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
6. TOP PHASE CAN BE SUPPLIED AS RIGHT HAND, LEFT HAND & SAG. "A" DESIGNATES SAG & "B" DESIGNATES GRADE CONDITION. "1" DESIGNATES REBAR STUBS ON ONE SIDE AND "2" DESIGNATES REBAR STUBS ON BOTH SIDES AS SHOWN.

PRODUCTION WORK ORDER		PRODUCT I.D.: CMBBIT9-B2LH	DESCRIPTION: KYTC MBI B2 TYPE 9 10' TOP PHASE (LEFT HAND)					
	QUALITY CONTROL CHECKLIST		PRODUCT VIEW: RIGHT SIDE UP		CUSTOMER: N/A			
	☐ ALL DIMENSIONS CORRECT. ☐ LIFTERS INSTALLED. ☐ CASTING AT CORRECT LOCATION. ☐ REINFORCING CORRECT. ☐ LIGHT BRUSH FINISH ACCEPTABLE. ☐ KYTC STANDARD THROAT CORRECT. ☐ ALL PATCHWORK ACCEPTABLE.		PLANT: BEAVER DAM, KY.		PROJECT: N/A			
			WEIGHT: 4,000 LBS.		STRUCTURE ID.: STOCK PRODUCT			
			TOP SECTION JOINT: N/A		SALES ORDER NO.: N/A			
			BOTTOM SECTION JOINT: SHIP-LAP GROOVE		PC: J.H. ROSS, PE		DRAWING: N. RICHARDS	
			QC CHECK INITIALS:		DATE: 04/01/26		SCALE: NTS	
							PG. 1 of 1	