

Job Name:
Job Location:
Contractor:

Plant: 100
7/14/2026 7:18:48 AM

Tech: Jared - A
PC:



Structure ID:

HWAW15F


15" - HW AW w/FLAT BOTTOM F/F

DIMENSIONS


TYPE	PIPE Ø	A	B	C	D	E	F	G	WEIGHT
AW	15"	2'-8"	4'-0"	2'-6"	2'-2"	2'-0"	6"	2'-8"	1,285 LBS

GENERAL NOTES:


- CONCRETE: 4,500 PSI AT 28 DAYS
- REINFORCING: #4 BAR @ 12" C.C. E.W.
(GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
- REINFORCING BARS TO BE TACK WELDED OR TIED




ISOMETRIC VIEW

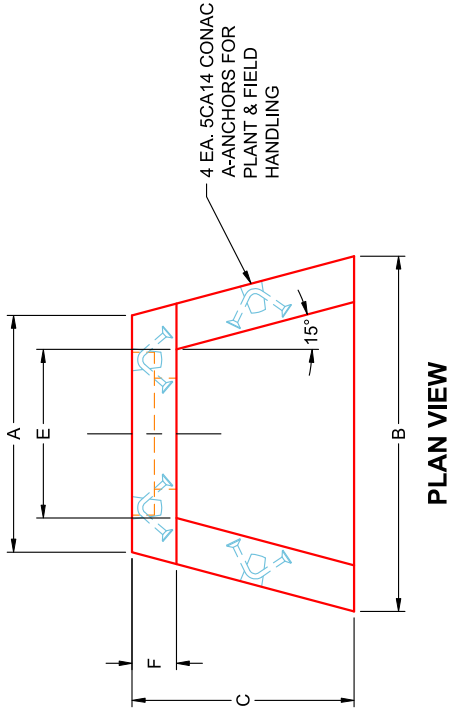

PLAN VIEW

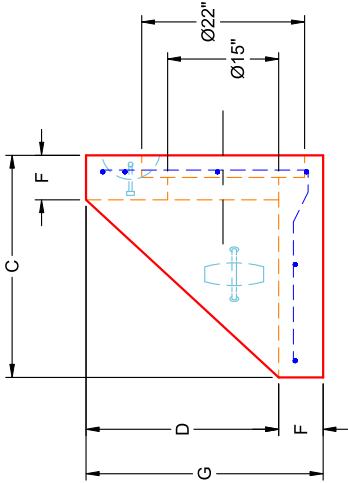

SIDE VIEW

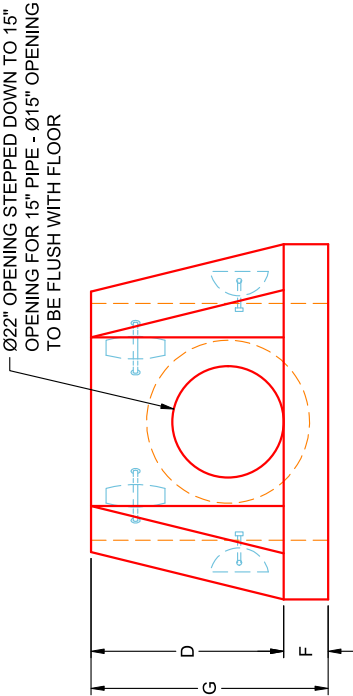

FRONT VIEW

PRODUCTION WORK ORDER

PRODUCT I.D.: HWAW15F	DESCRIPTION: 15" AW HEADWALL W/ FLAT BOTTOM
PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER:
PLANT: BEAVER DAM, KY	PROJECT:
WEIGHT: 1,285 LBS	STRUCTURE:
TOP SECTION JOINT: N / A	ORDER NO:
BASE SECTION JOINT: N / A	PE:
QC CHECK INITIALS:	DRAWING: K. CARDWELL
	SCALE: NTS
	PG. 1 OF 1



THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PRECAST, INC. ANY USE OR DUPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.