




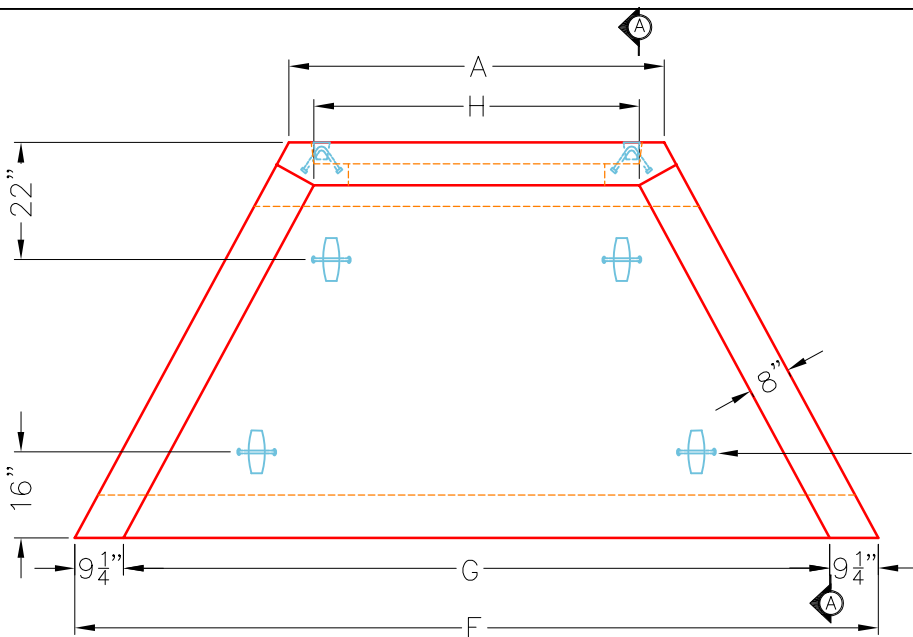


DIMENSIONS									
PIPE ϕ	A	B	C	D	E	F	G	H	WEIGHT
60"	7'-4"	7'-8"	6'-6"	2'-6"	7'-4"	12'-6 1/2"	11'-0"	6'-0"	17,158 lbs.

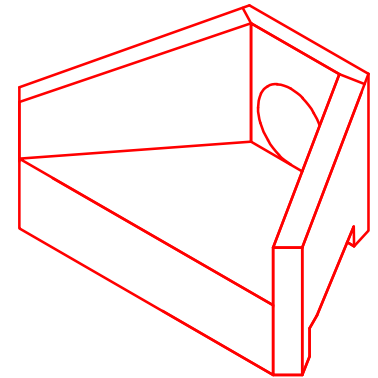

ISOMETRIC VIEW

60" ϕ HEADWALL

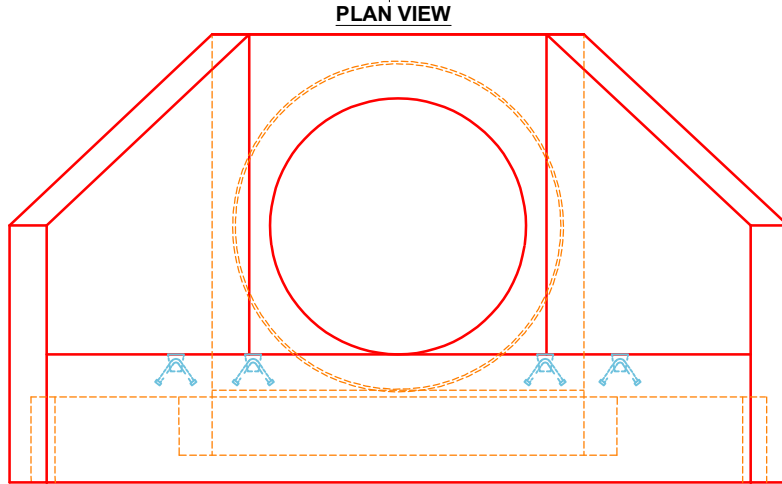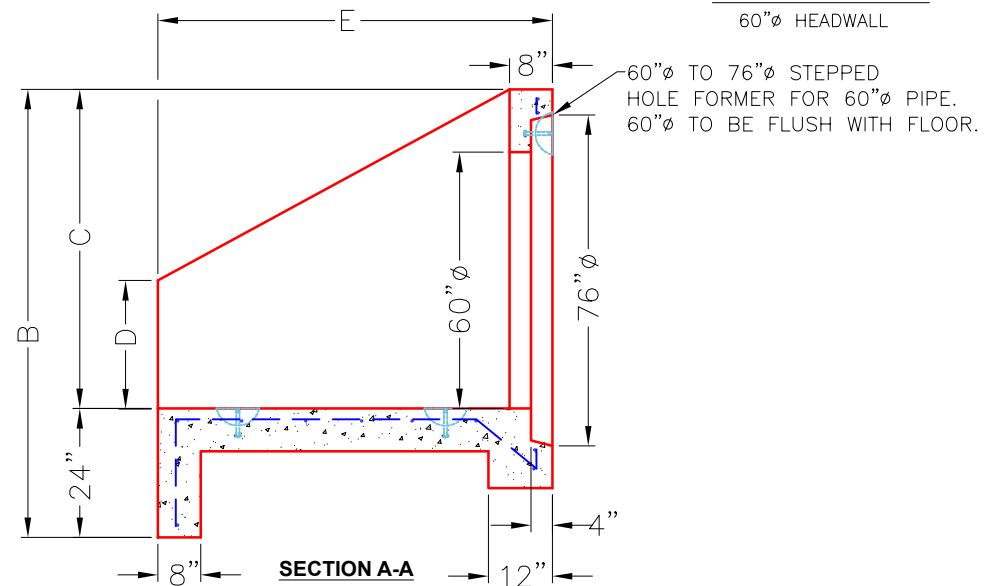

FRONT ELEVATION

~NOTES:

1. CONCRETE: 4500 PSI @ 28 DAYS.
2. REINFORCING: #5 BAR @ 12" C/C E.W.-GRADE 60, (WITH 2" CONCRETE COVER MINIMUM)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWING RDH-110-02, RDH-210-03 AND THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
5. 3/4" CHAMFER ON ALL EXPOSED EDGES.

PRODUCTION WORK ORDER

PRODUCT I.D.: HWPC60

DESCRIPTION: KYTC 60" ϕ PIPE CULVERT HEADWALL

QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ STEPPED HF CORRECT SIZE.
- ☐ REINFORCING CORRECT.
- ☐ SURFACE QUALITY ACCEPTABLE.
- ☐ EDGES CHAMFERED.
- ☐ ALL PATCHWORK ACCEPTABLE.

PRODUCT VIEW: RIGHT SIDE UP

CUSTOMER: STOCK

PLANT: BEAVER DAM, KY.

PROJECT: STOCK INVENTORY

WEIGHT: 17,158 LBS.

STRUCTURE ID.: N/A

TOP SECTION JOINT: N/A

SALES ORDER NO: N/A

BASE SECTION JOINT: N/A

CHECK: J.H. ROSS, PE

DRAWING: N. RICHARDS

QC CHECK INITIALS:

DATE: 05/04/24

SCALE: NTS

PG. 1 of 1

