
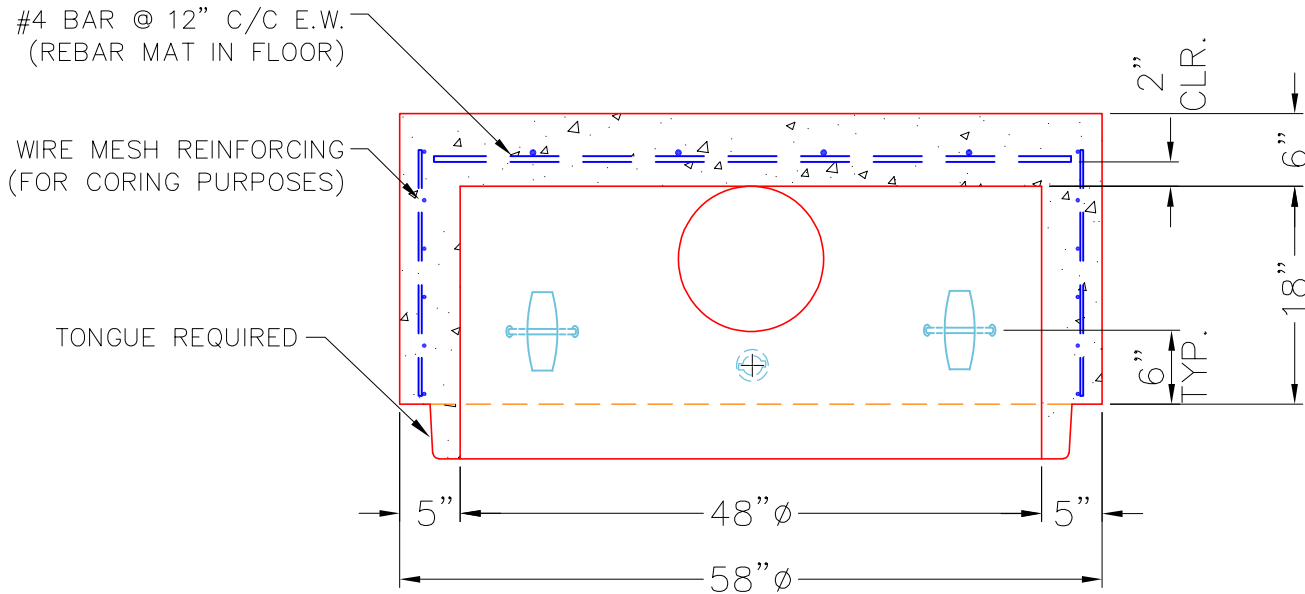


NOTES:

1. MANUFACTURE TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS (MINIMUM).
3. REINFORCING: WWF MESH-USE STANDARD FOR WALLS.
#4 BAR @ 12" C/C E.W. FOR FLOOR.
4. STEP PLUGS NOT REQUIRED.

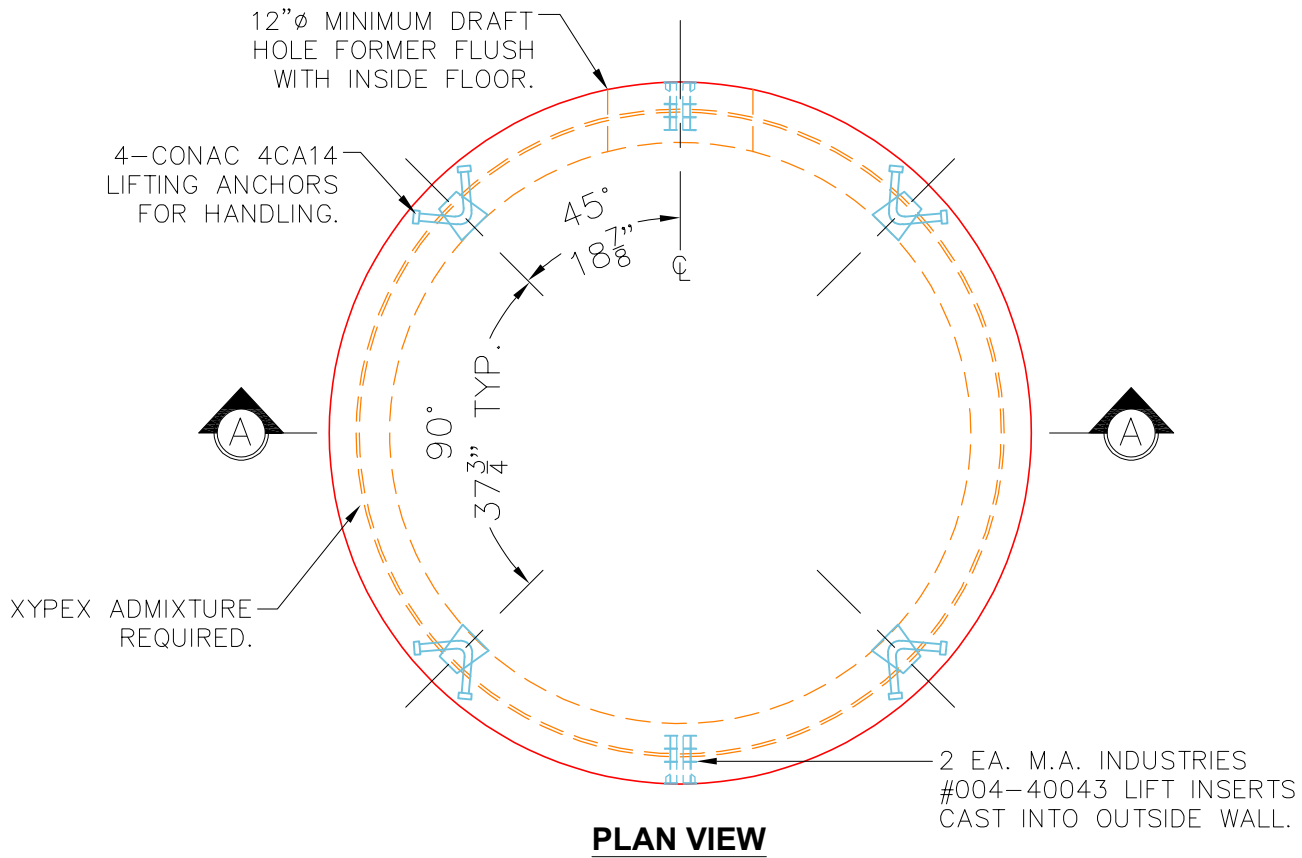

PRODUCTION WORK ORDER

PRODUCT ID.:
MH048BA18X-B

DESCRIPTION:
MANHOLE 48"Ø X 18" BLANK BASE W/XYPEX



QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ HOLE FORMER INSTALLED.
- ☐ NO STEP PLUGS INSTALLED.
- ☐ XYPEX ADMIXTURE ADDED.
- ☐ REINFORCING & SPACING CORRECT.
- ☐ TONGUE JOINT INSTALLED.

PRODUCT VIEW: UPSIDE-DOWN

PLANT: BEAVER DAM, KY.

WEIGHT: 2,766 LBS.

TOP JOINT: TONGUE

BOTTOM JOINT: N/A

QC CHECK INITIALS:

CUSTOMER: STOCK

PROJECT: STOCK

STRUCTURE ID.: 48"Ø X 18" BLANK BASE W/XYPEX

SALES ORDER NO.: N/A

CHK.: J.H. ROSS, PE

DRAWING: N. RICHARDS

DATE: 2/01/24

SCALE: NTS

PG. 1 of 1