


- GENERAL NOTES:
- 1. PER ASTM C-478 LATEST REVISION.
 - 2. CONCRETE: 4,500 PSI AT 28 DAYS.
 - 3. REINFORCING: #4 BAR AS SHOWN.


4 EA. 32"X32"X3"
KNOCKOUT PANELS
(EQUALLY SPACED)

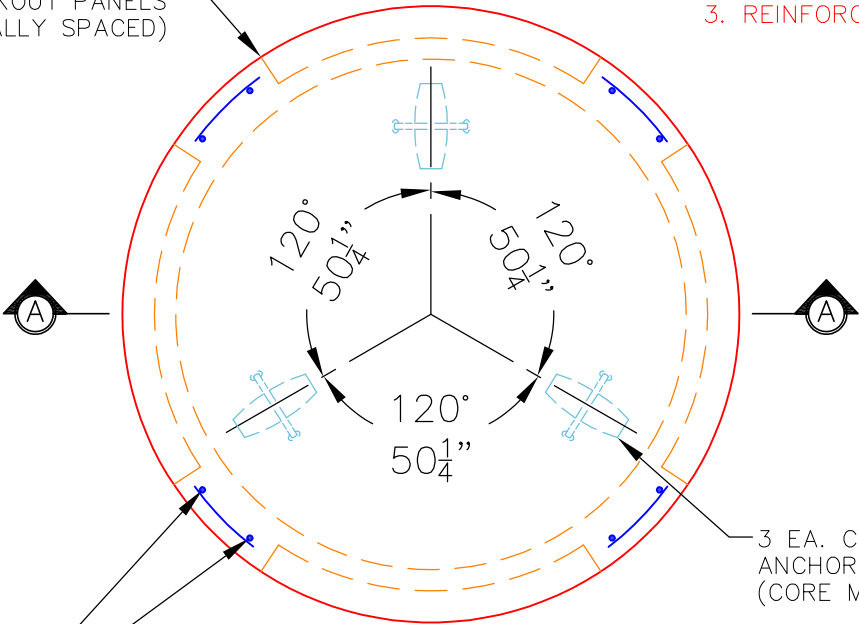

3 EA. CONAC 4CA14 LIFTING
ANCHORS CAST INTO FLOOR.
(CORE MEASUREMENT SHOWN)

PLAN VIEW
(UPSIDE-DOWN)

#4 BAR @ 12" C/C
E.W. MAT IN FLOOR W/
2-#4 VERTICAL BARS
TIED BETWEEN KO PANELS.

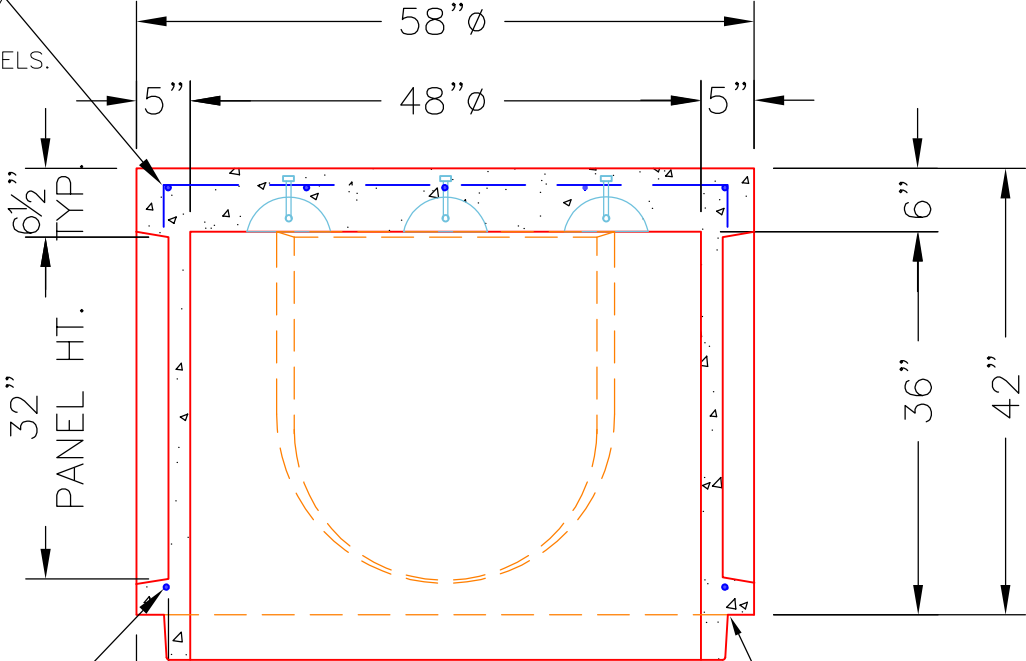

#4 BAR CIRCULAR BAR
TIED ABOVE PANELS.

3"
TYP.

SECTION A-A
(UPSIDE-DOWN)

STANDARD SINGLE
OFFSET TONGUE.

PRODUCTION WORK ORDER

PRODUCT I.D.:
MH048BA36-KO

DESCRIPTION:
KNOCKOUT MANHOLE BASE 48"Ø X 36" (4 PANEL)

QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ KNOCKOUT PANELS CORRECT.
- ☐ REINFORCING CORRECT.
- ☐ SURFACE QUALITY OKAY.
- ☐ TONGUE INSTALLED.
- ☐ BASE CLEAN & FREE OF DEBRIS.

PRODUCT VIEW: UPSIDE-DOWN

PLANT: BEAVER DAM, KY.

WEIGHT: 2,925 LBS.

TOP JOINT: TONGUE

BOTTOM JOINT: N/A

QC CHECK INITIALS:

CUSTOMER: STOCK

PROJECT: STOCK

STRUCTURE ID.: N/A

SALES ORDER NO: N/A

CHK.: J.H. ROSS, PE

DRAWING: N. RICHARDS

DATE: 11/22/23

SCALE: NTS

PG. 1 of 1

