
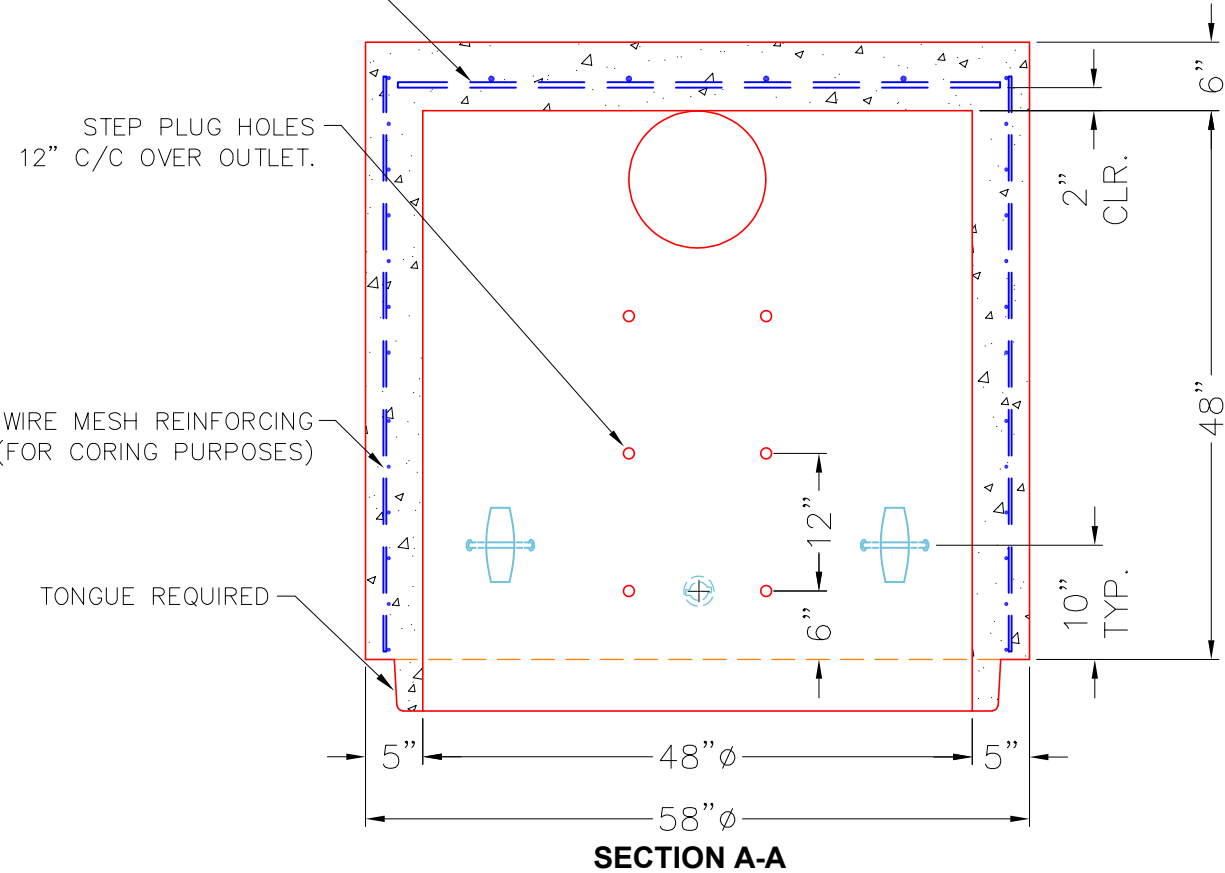


- NOTES:
- 1. MANUFACTURE TO ASTM C-478 (LATEST REVISION).
 - 2. CONCRETE: 4,000 PSI AT 28 DAYS (MINIMUM).
 - 3. REINFORCING: WWF MESH-USE STANDARD FOR WALLS.
#4 BAR @ 12" C/C E.W. FOR FLOOR.
 - 4. STEP PLUGS TO BE INSTALLED OVER THE OUTLET HOLE AT 12" C/C.

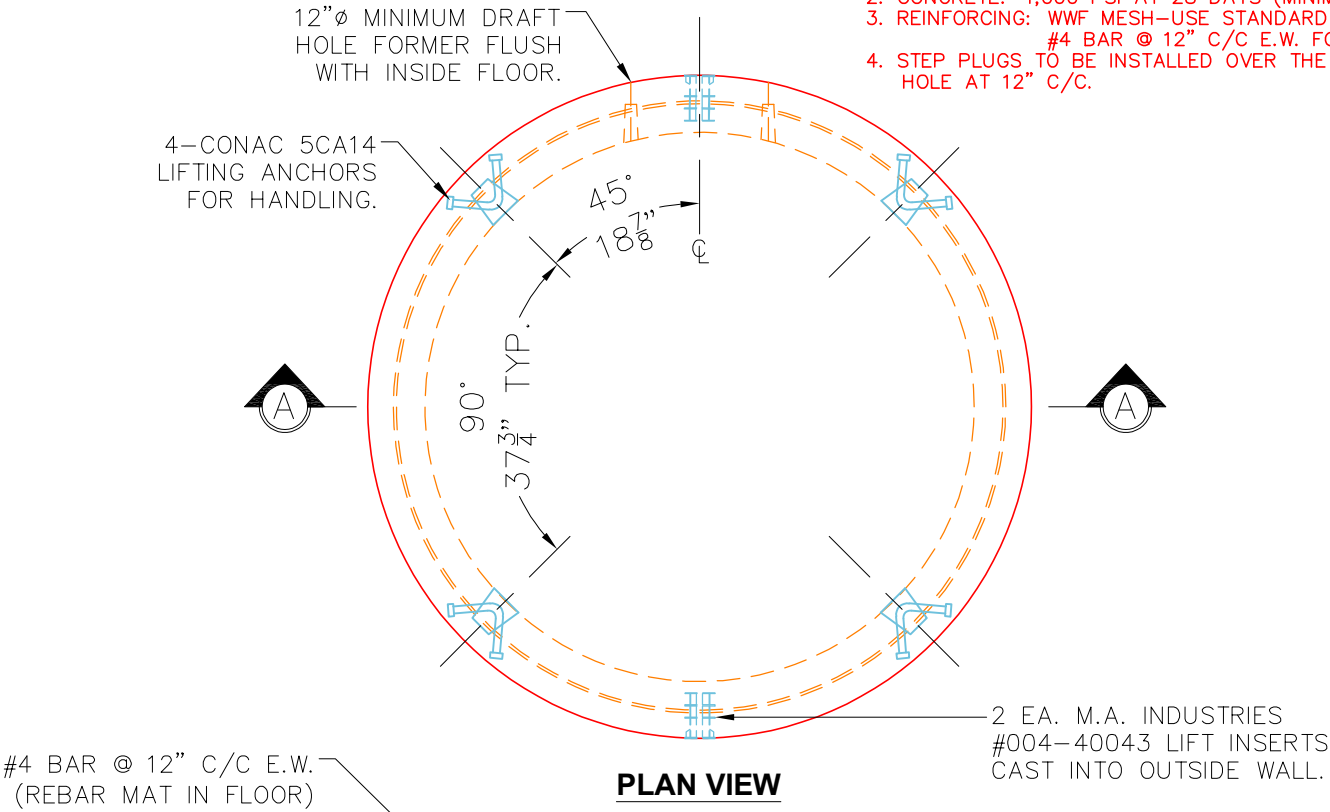

PRODUCTION WORK ORDER		PRODUCT ID.: MH048BA48-B	DESCRIPTION: MANHOLE 48"Ø X 48" BLANK BASE		
	QUALITY CONTROL CHECKLIST	PRODUCT VIEW: UPSIDE-DOWN	CUSTOMER: STOCK		
	☐ ALL DIMENSIONS CORRECT. ☐ LIFTERS INSTALLED. ☐ HOLE FORMER INSTALLED. ☐ STEP PLUGS INSTALLED. ☐ HEIGHT CORRECT. ☐ REINFORCING & SPACING CORRECT. ☐ TONGUE JOINT INSTALLED.	PLANT: BEAVER DAM, KY.	PROJECT: STOCK		
		WEIGHT: 4,933 LBS.	STRUCTURE ID.: 48"Ø X 48" BLANK BASE		
		TOP JOINT: TONGUE	SALES ORDER NO.: N/A		
		BOTTOM JOINT: N/A	CHK.: J.H. ROSS, PE	DRAWING: N. RICHARDS	
		QC CHECK INITIALS:	DATE: 2/27/24	SCALE: NTS	PG. 1 of 1
		THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PRECAST, INC. ANY USE OR DUPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.			