

Job Name: 25-4279 - KYTC Christian Co (251031)
 Job Location: Hopkinsville, KY
 Contractor: CITCO Water

Plant: 100
 5/8/2026 11:22:39 AM

Tech: Jared- F
 PC: C. Goff



Structure ID: VV

P2 MH060LD13SCDARED

MH FLAT TOP w/36"x42" Hatch w/ConBlock-CDA Red F/G

- P2) 60" - MH FLAT TOP w/36"x42" Hatch w/ConBlock-CDA Red F/G - 13"
- P1) 60" - MH BASE w/ConBlock-CDA Red T/n - 54"
- 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
- 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
- 1) ADMIXTURE CONBLOCK CDA RED
- 1) 60" - Conseal CS-102 1.00" (Double)
- 4) Hole - 8
- 1) Hole - 4

1993 lb
 8259 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb



Structure Total: 10251 lb

- Structure Notes:**
1. PER ASCTM C478 SPECIFICATIONS.
 2. CONCRETE = 4,500 PSI AT 28 DAYS.
 3. NO STEPS.
 4. ADMIXTURE = CONBLOCK CDA RED.
 5. ALUMINUM HATCH SUPPLIED BY OTHERS & CAST IN TOP SLAB BY ICAST. CENTERED LOCATION TO BE VERIFIED.

REINFORCING PER ASTM A615 (GRADE 60)
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
 - RISER/WALLS (As .18)
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,500 PSI AT 28 DAYS.
3. CONBLOCK CDA RED ADMIXTURE REQUIRED.
4. REINFORCMENT: #5 BAR @ 6" C.C.E.W. PER ASTM A615 (GRADE 60).
4. JOINT SEALANT - 1" CS-102- DOUBLE
5. HATCH: 36" X 42" ALUMINUM HATCH SUPPLIED BY OTHERS & CAST IN TOP SLAB BY ICAST.

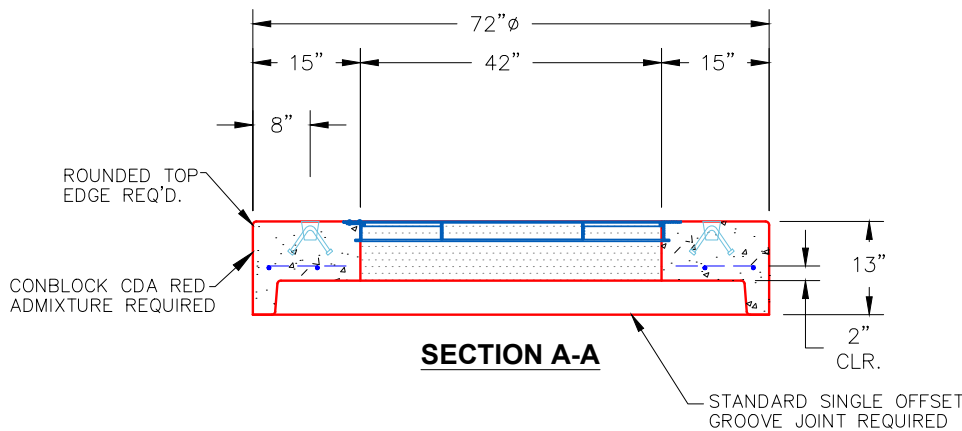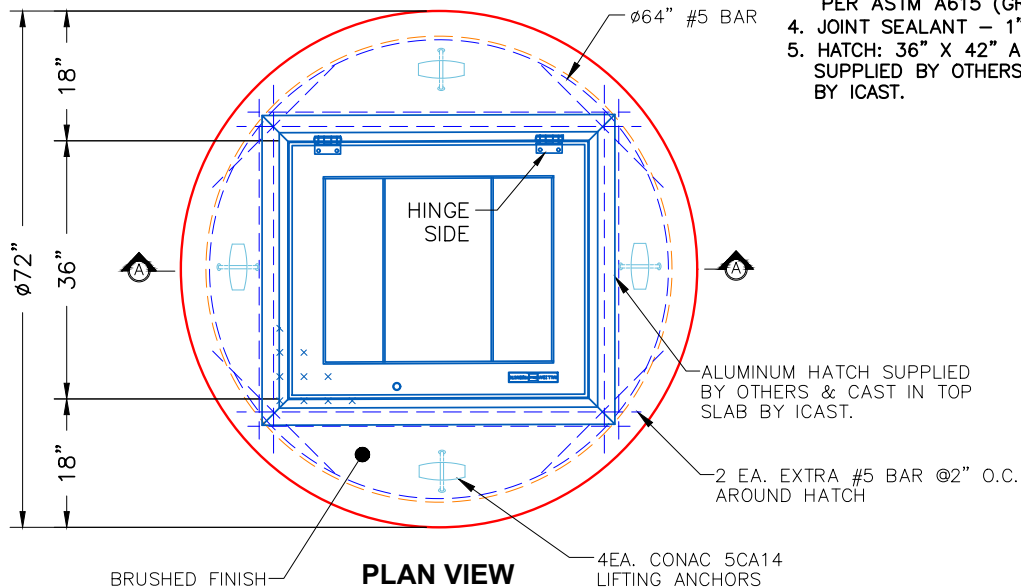

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 6"	Height (Ext): 13"	Weight (Net): 1993 lb Volume (Net): 0.51cu.yd
----------------------------------	----------------------------------	--------------------	-------------------	--