

Job Name: 26-2146 - Fairview Apartments
Job Location: Russell Springs, KY 42642
Contractor: Dirt Design Construction LLC

Plant: 100

8/3/2026 11:47:19 AM

Tech: J. Horsley

PC: M. Sullivan



Structure ID: 20 ST-DCB

P2 BX2436_08LD08

CB FLAT TOP 8"W (18"x36" HOLE)

P3) 18" x 36" - CASTING HEIGHT - 5.5"
P2) 24" x 36" - CB FLAT TOP 8"W (18"x36" HOLE) - 8"
P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 20"
1) 24" x 36" - Conseal CS-102 1.00"
2) Hole - 20

Structure Total:

0 lb
961 lb
3015 lb
0 lb
0 lb
0 lb


3977 lb

Structure Notes:

1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY OTHERS (HOE 580 F/G)

REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB = H20 LOADING
- WALLS (As .31) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

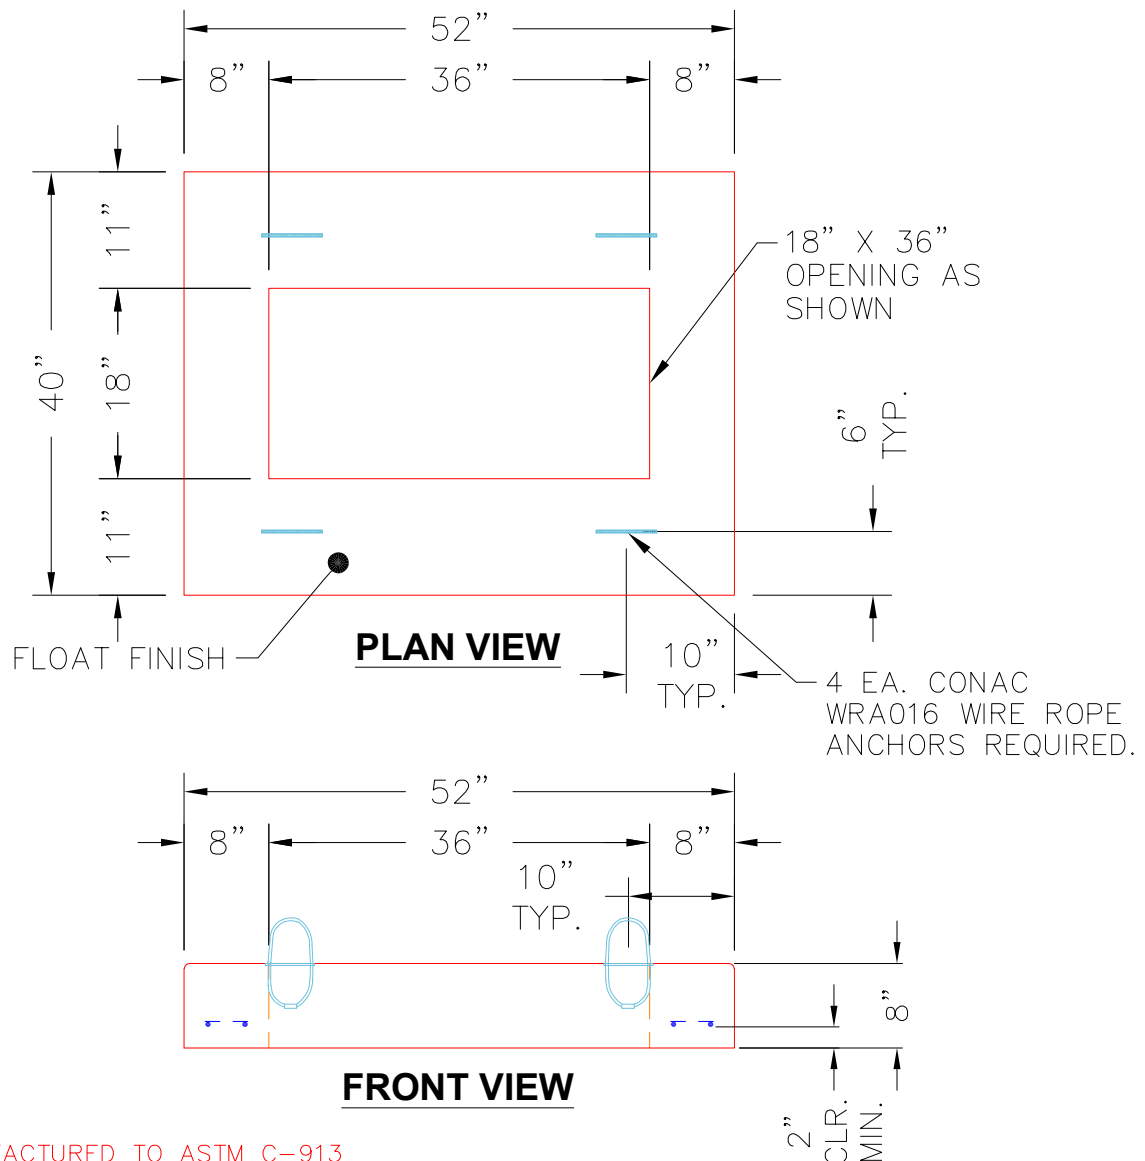

NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: H20 LOADING
#5 BAR @ 6" O.C. E.W.
(GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 961 lb
Volume (Net): 0.25cu.yd