

Job Name: 25-1267B Grocery Owensboro KY
 Job Location: Owensboro, KY
 Contractor: Winwater Hartford KY Co.

Plant: Beaver Dam

9/18/2025 12:10:26 PM

Tech: J. Coppage

PC: A. Chambers



Structure ID: CB-A7


P2 MH048LD07S

MH FLAT TOP w/30"x30" Hole

- P3) 30" x 30" - CASTING HEIGHT - 4"
- P2) 48" - MH FLAT TOP w/30"x30" Hole - 7"
- P1) 48" - MH BASE Custom Ht - 40"
- 1) 48" - SGL 1"x14.5' Butyl (2x)
- 1) DOGHOUSE INVRTD - 38"x40"
- 1) Hole - 30
- 3) MH Step ML-10-TDS-NCR - 10"

- 0 lb Structure Notes:
1. JR HOE HOE-468 PROVIDED BY ICAST.
 2. PER ASTM C478 SPECIFICATIONS.
 3. CONCRETE = 4,000 PSI AT 28 DAYS.
 4. REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
 - RISER/WALLS (As .12)
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Structure Total: 4434 lb

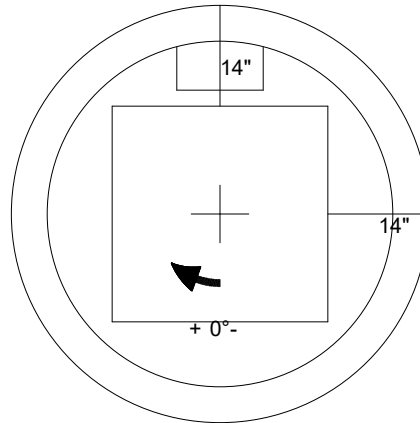

	48" - MH FLAT TOP w/30"x30" Hole - 7" - (P2)	
--	--	--

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: Flat

Wall Thickness: 5"

Height (Ext): 7"

Weight (Net): 1264 lb
 Volume (Net): 0.31cu.yd