




Structure ID: ST2 (4)


P1 HWA15F

15" - HW AW w/FLAT BOTTOM F/F


DIMENSIONS & QUANTITIES									
TYPE	PIPE Ø	A	B	C	D	E	F	G	WEIGHT
AW	15"	2'-8"	4'-0"	2'-6"	2'-2"	2'-0"	6"	0"	1,380 LBS.

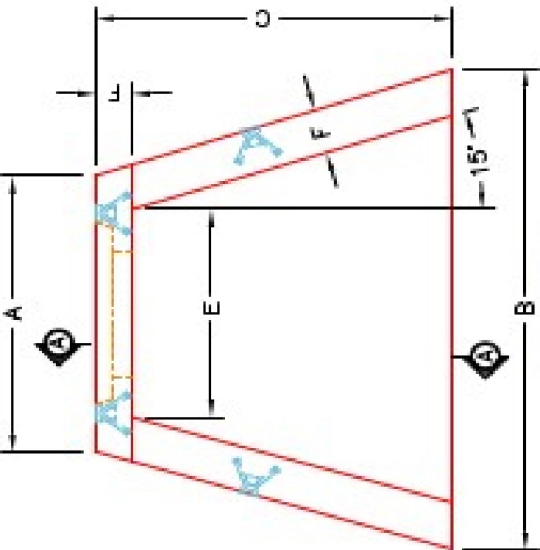


PLAN VIEW

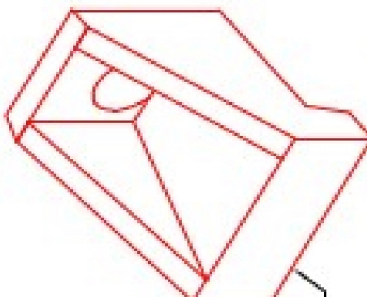

ISOMETRIC VIEW

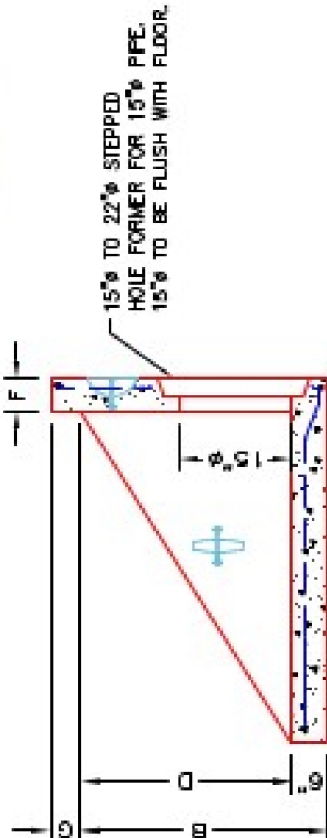

SECTION A-A

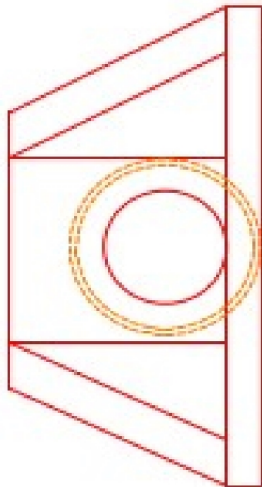

FRONT ELEVATION

NOTES:

1. CONCRETE: 4500 PSI AT 28 DAYS MIN. STRENGTH.
2. REINFORCING: #4 BAR @ 12" C/C E.W.-GRADE 60, (WITH 2" CONCRETE COVER MINIMUM)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.

PRODUCTION WORK ORDER

QUALITY CONTROL CHECKLIST	
☐	ALL DIMENSIONS CORRECT.
☐	LIFTERS INSTALLED.
☐	STEPPED IF CORRECT SIZE.
☐	REINFORCING CORRECT.
☐	CLEARANCE ON REINFORCING CORRECT.
☐	EDGES CHAMFERED.
☐	ALL PATCHWORK ACCEPTABLE.



DESCRIPTION: AW WINGED HEADWALL FOR 15" PIPE	
PRODUCT I.D.: HWA15F	CUSTOMER: STOCK
PRODUCT VIEW: RIGHT SIDE UP	PROJECT: STOCK
PLANT: BEAVER DAM, KY.	STRUCTURE ID: STOCK
WEIGHT: 1,630 LBS.	SALES ORDER NO: T.B.D.
TOP SECTION JOINT: N/A	CHECK: A. WELLS
BASE SECTION JOINT: N/A	DRAWING: J. HORSLEY
QC CHECK INITIALS:	DATE: 09/25/24
	SCALE: NTS
	PG. 1 of 1