




Job Name: 26-2146 - Fairview Apartments Job Location: Russell Springs, KY 42642 Contractor: Dirt Design Construction LLC				Plant: 100 8/3/2026 11:45:39 AM		Tech: J. Horsley PC: M. Sullivan				
Structure ID: 24 ST-SCB										
P1 MH048BAVF				MH BASE Custom Ht						
P3) 32" x 32" - CASTING HEIGHT - 3" P2) 48" - MH FLAT TOP w/32"x32" Hole - 7" P1) 48" - MH BASE Custom Ht - 29" 1) 48" - Conseal CS-102 1.00" 2) Hole - 24 1) Hole - 16 1) Hole - 18 Structure Total: 3717 lb						0 lb 950 lb 2767 lb 0 lb 0 lb 0 lb 0 lb 0 lb Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY OTHERS (HOE 595 F/G) REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB = H20 LOADING. - RISER (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Rim: 1057.33' Rim to Invert: 3.28' Slack: 0.36" Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	1054.05'	0°	0"	18" HDPE	21.2"	Hole 24	24"	25.133"	-1.6"	0"
Invert 2	1054.05'	185°	93.637"	18" HDPE	21.2"	Hole 24	24"	25.133"	-1.6"	0"
Invert 3	1054.05'	279°	141.215"	12" HDPE	14.5"	Hole 16	16"	16.312"	-1.25"	0"
Invert 4	1054.05'	90°	45.553"	12" HDPE	14.5"	Hole 18	18"	18.451"	-1.25"	0"
Invert 5										
Invert 6										
Invert 7										
Invert 8										




RIGHT-SIDE UP VIEW (int. dimensions)

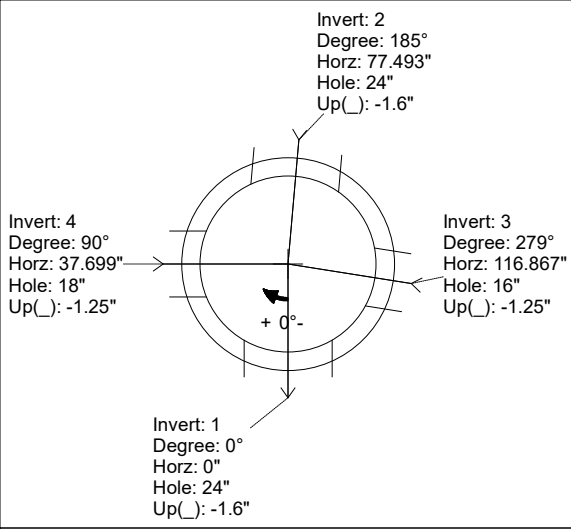

UPSIDE-DOWN VIEW (int. dimensions)

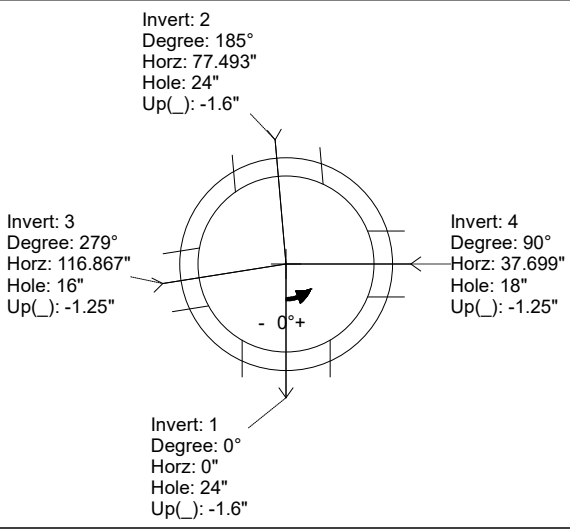

INSIDE WALL DIMENSIONS

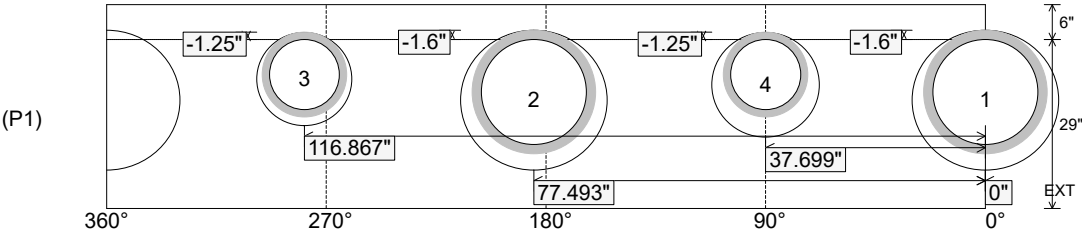

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 29" Height (Ext): 35"	Weight (Net): 2767 lb Volume (Net): 0.71cu.yd
----------------------------------	-------------------------------	--	--	--