

Job Name: 26-2227 - UK Research and Education Center Entrance
Job Location: Princeton, KY
Contractor: J & J Excavating

Plant: Beaver Dam, KY
7/18/2026 11:10:07 AM

Tech: K. Cardwell
PC: E. Bradley




Structure ID: QL1 HW (2)
P1 HWPC1423

23" x 14" - SLOPED & FLARED HEADWALL (ELL. RCP) F/F


GENERAL NOTES:

- 1. THIS DRAWING TO BE USED IN CONJUNCTION WITH KYTC STANDARD DRAWING RDH-020-03 & STANDARD SPECIFICATIONS FOR ROAD & BRIDGE CONSTRUCTION
- 2. CONCRETE: 4,500 PSI AT 28 DAYS
- 3. REINFORCEMENT: #4 BAR @ 12" C.C. E.W. (GRADE 60)
- 4. REINFORCING BARS TO BE TACK WELDED OR TIED
- 5. 3/4" CHAMFER REQUIRED ON ALL EXPOSED EDGES
- 6. PIPE & LIFTING ANCHOR POCKETS TO BE GROUTED BY CONTRACTOR
- 7. WEIGHT: 4,215 LBS

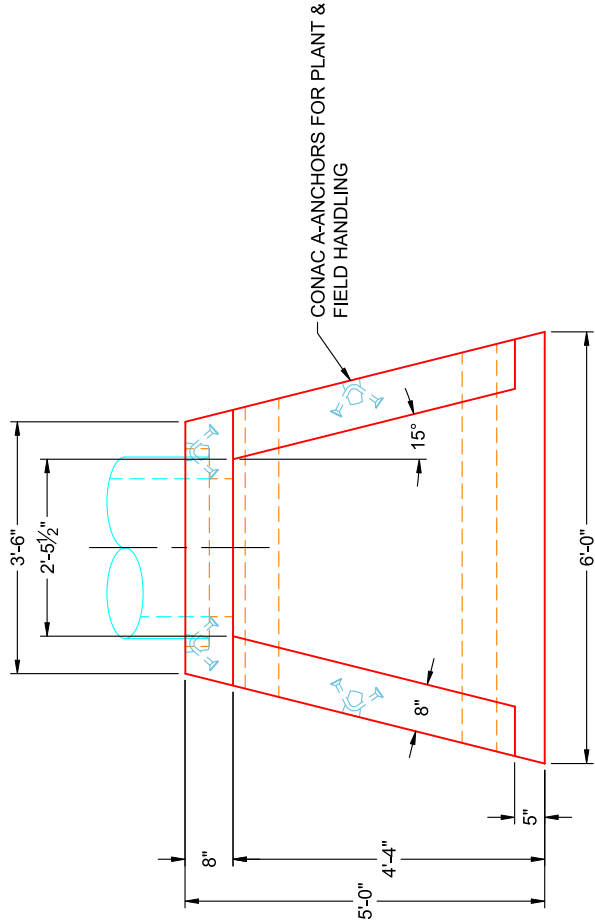


TOP VIEW

2'-9" X 2'-0" OPENING STEPPED DOWN TO 1'-11" X 1'-2" OPENING FOR 23" X 14" HERCP (18" EQ) - 1'-11" X 1'-2" OPENING TO BE FLUSH WITH FLOOR

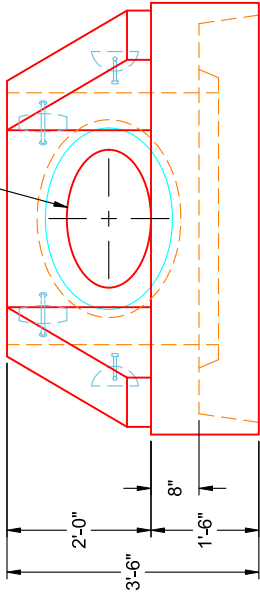

FRONT VIEW

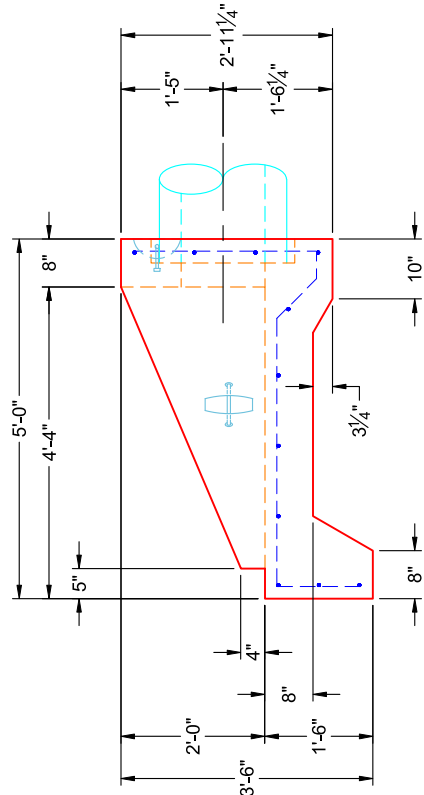

SIDE VIEW