

Job Name: 25-1664 Springfield WWTP
 Job Location: Springfield, TN
 Contractor: Smith Contractors, Inc.

Plant: Beaver Dam

Tech: J. Coppage

2/2/2026 12:06:34 PM

PC: C. Goff





Structure ID: CC-SSMH-0+20.00

P4 MH048CN36X

ECC XYPEX CONE w/ 24" HOLE

| | | |
|-----|---|-----------------|
| P5) | 24" - CASTING HEIGHT - 6" | 0 lb |
| P4) | 48" - ECC XYPEX CONE w/ 24" HOLE - 36" | 2251 lb |
| P3) | 48" - MH RISER w/XYPEX - 72" | 5030 lb |
| P2) | 96" - MH Trans. Slab - 48in Hole ECC, Xypex - 17" | 9251 lb |
| P1) | 96" - MH MONOBASE w/XYPEX 13F, Custom Ht - 96" | 33434 lb |
| 1) | JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 | 0 lb |
| 1) | JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) | 0 lb |
| 1) | SECONDARY POUR - Floor | 0 lb |
| 1) | 96" - Conseal CS-102 1.00" (Double) | 0 lb |
| 2) | 48" - Conseal CS-102 1.00" (Double) | 0 lb |
| 1) | Kor-N-Seal2 - S206-36 | 6 lb |
| 1) | Kor-N-Seal2 - S206-30 | 6 lb |
| 1) | Kor-N-Seal2 - S206-22L | 6 lb |
| | 513.44 SqFt) MASTERSEAL 610 - Two Coats [EXT] | 0 lb |
| | Structure Total: | 49985 lb |

Structure Notes:
 1. JBS-1155 BDWT SANITARY BY ICAST.
 2. PER ASTM C478 SPECIFICATIONS.
 3. CONCRETE = 4,000 PSI AT 28 DAYS.
 4. REINFORCING PER ASTM A615 (GRADE 60).
 - CONE (As .12)
 - TRANS. SLAB - AS SHOWN BY WINFORD PETRONE
 - RISER/WALLS (As .18)
 - FLOOR - AS SHOWN BY WINFORD PETRONE

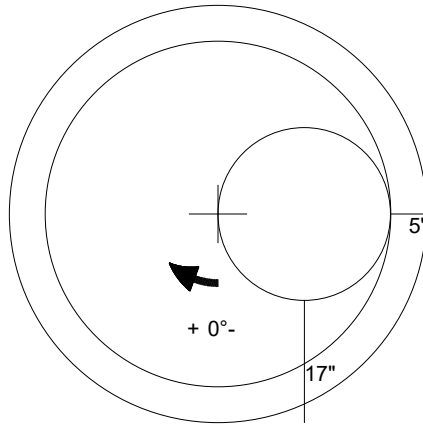

48" - ECC XYPEX CONE w/ 24" HOLE - 36" - (P4)

Coating (Int):
 Coating (Ext): MASTERSEAL 610

Seam Up: Flat
 Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 36"

Weight (Net): 2251 lb
 Volume (Net): 0.57cu.yd