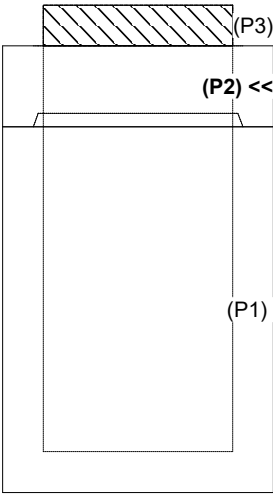

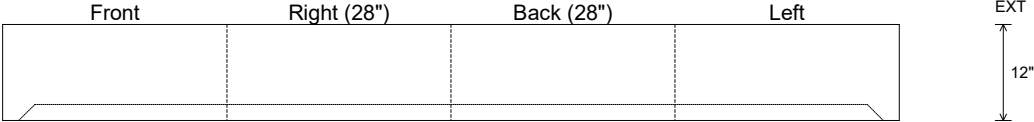


Job Name: 26-2310 - 3rd & Madison Townhomes - Ph. 1 Job Location: Nashville, TN 37208 Contractor: Hayes Pipe Supply				Plant: 100 6/15/2026 10:59:49 AM		Tech: Jared - F PC: E. Bradley					
Structure ID: B1 ST-CB											
P2 BX2828-06R12				BOX RISER 6inW F/G							
P3) 28" x 28" - CASTING HEIGHT - 6" P2) 28" x 28" - BOX RISER 6inW F/G - 12" P1) 28" x 28" - BOX BASE 6inW, 6inF T/n - 48" 2) 28" x 28" - Conseal CS-102 1.00" 1) Hole - 16 1) Hole - 14						0 lb 822 lb 3913 lb 0 lb 0 lb 0 lb ----- Structure Total: 4735 lb		Structure Notes: . 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING SUPPLIED BY OTHERS (JBS 4300 F/G). . REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 427.47' Rim to Invert: 5.56' Slack: 1.97" Sump: 1.25" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)											
											
INSIDE WALL DIMENSIONS											
											
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: Groove		Wall Thickness: 6" Floor Height: 0"		Height (Int): 12" Height (Ext): 12"		Weight (Net): 822 lb Volume (Net): 0.21cu.yd	