

Job Name: 25-4430 KYTC Daviess Co Call 104 (2511035)
 Job Location: Owensboro, KY
 Contractor: Ragle, Inc.

Plant: 100

3/11/2026 2:14:40 PM

Tech: Jared - A

PC: Andy Chambers



Structure ID: 8888R (22)


P2 BX024060-08LD08-1559

BX FLAT LID 8inW, w/15"x59" HOLE (KYTC DBI-13S)


- P3) 15" x 59" - P.I.P. - BY OTHERS - 8"
- P2) 24" x 60" - BX FLAT LID 8inW, w/15"x59" HOLE (KYTC DBI-13S) - 8"
- P1) 24" x 60" - BOX BASE 8inW, 8inF, Variable Ht - 52"
- 1) CASTING - HOE KY-230-S F/G (SAG)
- 1) SECONDARY POUR - Walls
- 1) 24" x 60" - Conseal CS-102 1.00"
- 1) Hole - 38
- 1) Hole - 30
- 2) Hole - 4

- Structure Notes:**
- **KYTC STATE PROJECT**
 - 1. HOE KY-230-S F/G (SAG) PROVIDED BY ICAST.
 - 2. KYTC DBI TYPE 13S / ASTM C-913 SPEC'S.
 - 3. CONCRETE = 4,000 PSI AT 28 DAYS.
 - 4. NO INVERT CHANNEL.
 - 5. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DBL MAT).
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W..
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
 - 6. STUB #5 BARS 12" OUT OF THE TOP OF THE SLAB (SPACED AT 12" CC) AROUND THE 15" X 59".

Structure Total: 9441 lb

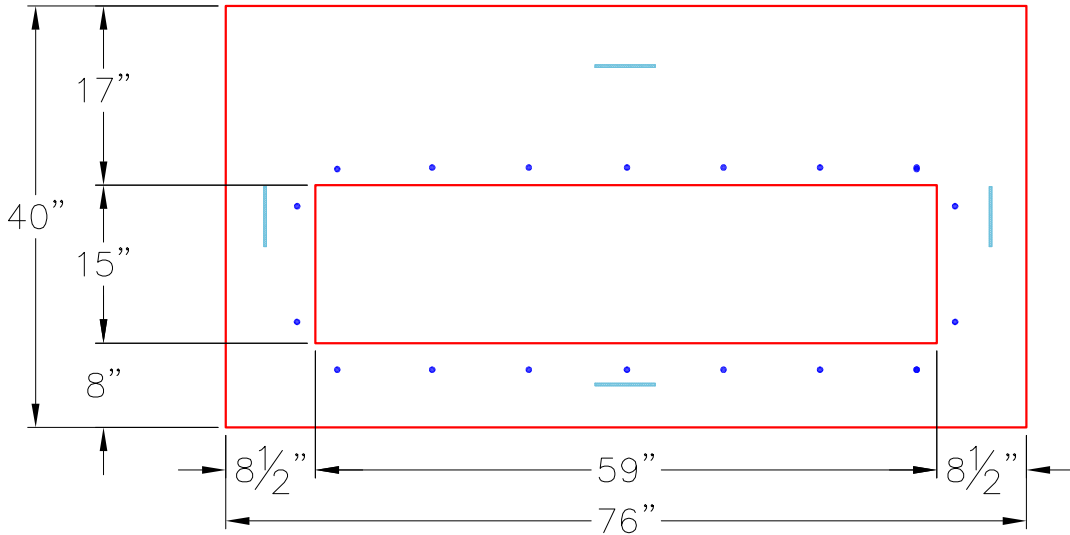

TOP VIEW

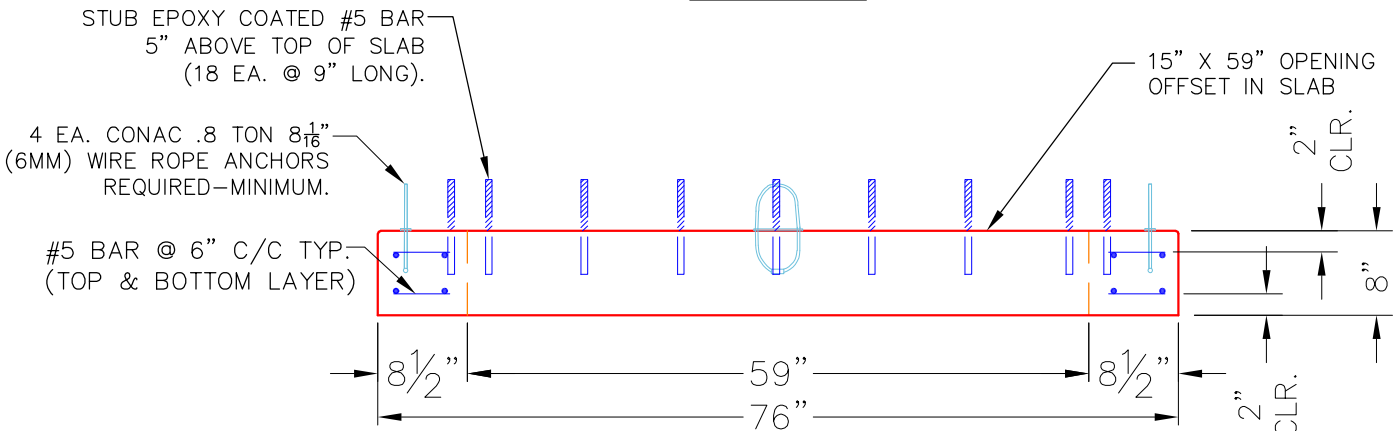

FRONT VIEW

- NOTES:**
- CONCRETE: 4500 PSI @ 28 DAYS.
 - MANUFACTURED TO KYTC & ASTM C-913 SPECIFICATIONS.
 - REINFORCING: #5 BAR AS SHOWN-GRADE 60. (T&B LAYER)
 - 4 EA. CONAC WIRE LOOP LIFTS REQUIRED (MIN.)

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 1461 lb
 Volume (Net): 0.37cu.yd