

Job Name: 25-3579 - Lebanon Rd Clarks Run Trunk Sewer Ph 2
 Job Location: Danville, KY
 Contractor: Hubert Excavating & Contracting

Plant: 100

6/3/2026 3:01:04 PM

Tech: J. Horsley

PC: C. Goff



Structure ID: MH A8

P3 MH048RS72S

MH RISER w/COATING T/G



P5) 24" - CASTING HEIGHT - 7"	0 lb
P4) 48" - ECC CONE w/ 24" HOLE, w/Coating F/G - 42"	3116 lb
P3) 48" - MH RISER w/COATING T/G - 72"	5030 lb
P2) 60" - MH Trans. Slab - 48" Hole ECC, w/Coating T/G - 13"	1928 lb
P1) 60" - MH BASE w/FLANGE (08F/07EF) w/Coating T/n - 70"	10274 lb
1) JOINT WRAP - 12" WD x 060" MAC WRAP	0 lb
1) 60" - MH INVERT CHANNEL - FULL HEIGHT	2692 lb
1) SPECIAL EXTERNAL COATING - Carboline 300M	0 lb
1) SECONDARY POUR - Extended Flange	0 lb
2) JOINT WRAP - 12" WD x 048" MAC WRAP	0 lb
1) 60" - Conseal CS-102 1.00" (Double)	0 lb
2) 48" - Conseal CS-102 1.00" (Double)	0 lb
1) 24" - Conseal CS-102 1.00" (Double)	0 lb
2) A-Lok - 1040	2 lb
16) MH Step ML-10-TDS-NCR - 10"	0 lb
308.6 SqFt) Carboline Bitumastic 300M [EXT]	0 lb
Structure Total:	23043 lb

Structure Notes:
 1. PER ASTM C-478 SPECIFICATIONS
 2. CONCRETE: 4,000 PSI AT 28 DAYS
 3. REINFORCEMENT: PER ASTM A615
 4. CARBOLINE 300M EXTERIOR COATING REQUIRED
 5. STEPS AT 260 DEGREES
 6. HOE MC-375 FRAME & COVER "SANITARY" SUPPLIED BY OTHERS


Rim: 905' Rim to Invert: 16.985' Slack: 2.035" Sump: 2.215" Step Position: 260°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

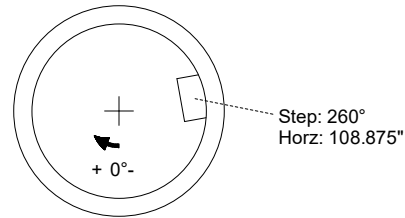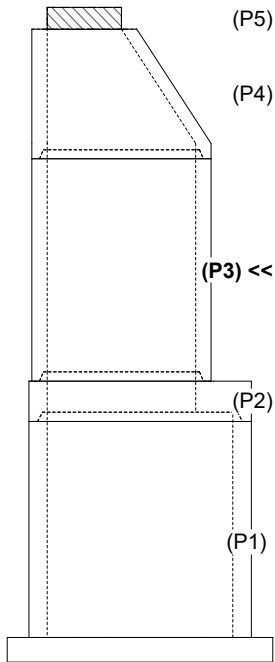

INSIDE WALL DIMENSIONS

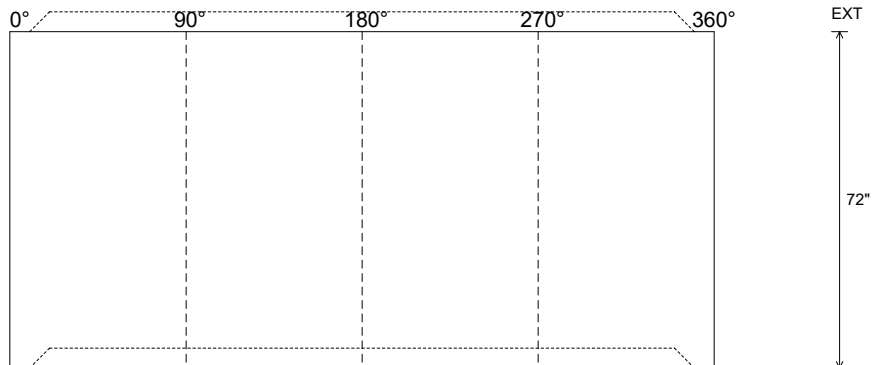

Coating (Int):
 Coating (Ext): Carboline Bitumastic 300M

Seam Up: Tongue
 Seam Dn: Groove

Wall Thickness: 5"
 Floor Height: 0"

Height (Int): 72"
 Height (Ext): 72"

Weight (Net): 5030 lb
 Volume (Net): 1.28cu.yd

Job Number:

25-3579

Job Name:

Lebanon Rd Clarks Run Trunk Sewer
Ph 2

Structure:

MH A8

Note:

This Structure Is To Receive An
External Coating of Carboline 300M
(Supplied By iCast)