

Job Name: 25-1431 - Georgetown Commons
 Job Location: Georgetown, KY
 Contractor: Winwater Hartford KY Co.

Plant: Beaver Dam

4/28/2026 8:56:27 AM

Tech: J. Coppage

PC: A. Chambers



Structure ID: SSMH-196



P3 MH048CN30-S

ECC CONE w/ 24" HOLE NO STEP

- P4) 24" - CASTING HEIGHT - 7"
- P3) 48" - ECC CONE w/ 24" HOLE NO STEP - 30"
- P2) 48" - MH RISER NO STEPS - 48"
- P1) 48" - MH BASE - 24"
- 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
- 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
- 1) 48" - MH INVERT CHANNEL - FULL HEIGHT
- 2) 48" - Conseal CS-102 1.00" (Double)
- 2) A-Lok - 0285

- 0 lb Structure Notes:
- 2050 lb 1. JR HOE MC-375 SELF SEALING SAN BY ICAST
 - 3353 lb 2. PER ASTM C478 SPECIFICATIONS.
 - 2944 lb 3. CONCRETE = 4,000 PSI AT 28 DAYS.
 - 0 lb 4. REINFORCING PER ASTM A615 (GRADE 60).
 - 0 lb - CONE (As .12)
 - 1440 lb - RISER/WALLS (As .12)
 - 0 lb - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
 - 2 lb 5. **NO STEPS**
 -

Structure Total: 9789 lb

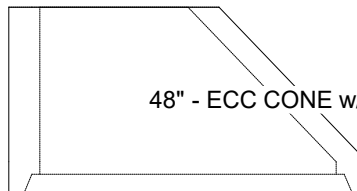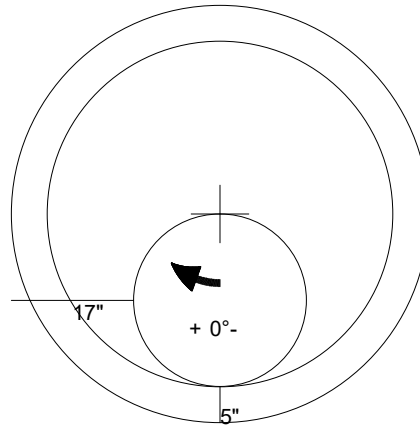

48" - ECC CONE w/ 24" HOLE NO STEP - 30" - (P3)

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 30"

Weight (Net): 2050 lb
 Volume (Net): 0.41cu.yd