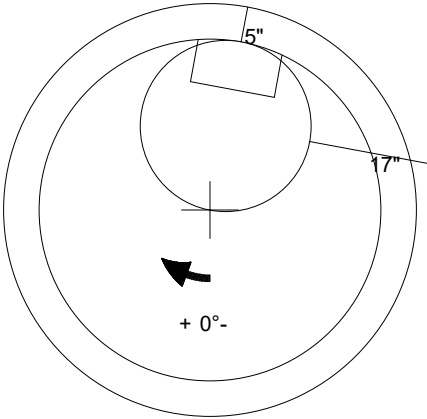



Job Name: 26-2146 - Fairview Apartments Job Location: Russell Springs, KY 42642 Contractor: Dirt Design Construction LLC		Plant: 100 8/3/2026 11:47:11 AM	Tech: J. Horsley PC: M. Sullivan	
Structure ID: MH 1 SS-MH				
P2 MH048CN30		ECC CONE w/ 24" HOLE		
P4) 24" - CASTING HEIGHT - 7" P3) 24" - GRADE RING - 4" P2) 48" - ECC CONE w/ 24" HOLE - 30" P1) 48" - MH BASE - 24" 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 3) PSX - 12-08 NYLO 4) MH Step ML-10-TDS-NCR - 10"		0 lb 270 lb 2050 lb 2863 lb 1440 lb 0 lb 0 lb 0 lb 0 lb 24 lb 0 lb ----- 6647 lb Structure Total:	Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY OTHERS (HOE MC-420 F/C). REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.	
				
 48" - ECC CONE w/ 24" HOLE - 30" - (P2)				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 30"	Weight (Net): 2050 lb Volume (Net): 0.41cu.yd