

Job Name: 25-1267B Grocery Owensboro KY
 Job Location: Owensboro, KY
 Contractor: Winwater Hartford KY Co.

Plant: Beaver Dam

9/18/2025 12:10:31 PM

Tech: J. Coppage

PC: A. Chambers



Structure ID: CB-C1



P2 MH048LD12S

MH FLAT TOP w/30"x30" Hole

- P3) 30" x 30" - CASTING HEIGHT - 4"
- P2) 48" - MH FLAT TOP w/30"x30" Hole - 12"
- P1) 48" - MH BASE - 54"
- 1) 48" - SGL 1"x14.5' Butyl (2x)
- 2) Hole - 26
- 4) MH Step ML-10-TDS-NCR - 10"

- Structure Notes:
- 1. JR HOE HOE-468 PROVIDED BY ICAST.
 - 2. PER ASTM C478 SPECIFICATIONS.
 - 3. CONCRETE = 4,000 PSI AT 28 DAYS.
 - 4. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
 - RISER/WALLS (As .12)
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Structure Total: 5986 lb

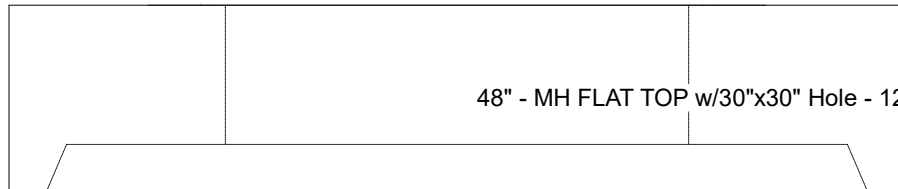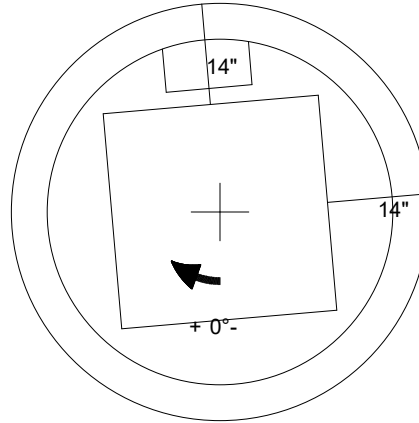

48" - MH FLAT TOP w/30"x30" Hole - 12" - (P2)

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 12"

Weight (Net): 1350 lb
 Volume (Net): 0.33cu.yd