
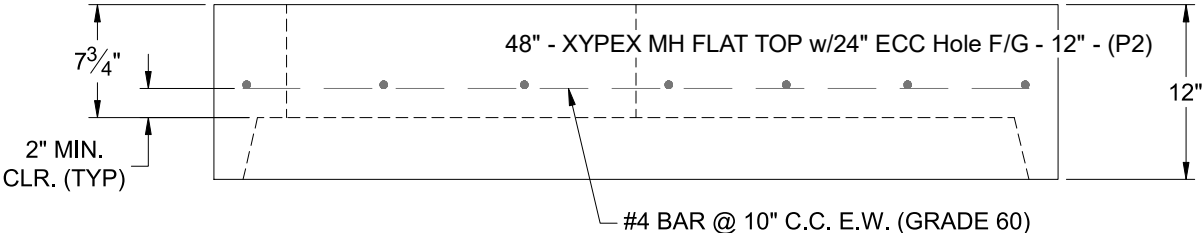


Job Name: 25-2541 - Wartrace Creek Interceptor Job Location: Springfield, TN 37172 Contractor: Cumberland Pipeline LLC	Plant: Beaver Dam, KY 6/7/2026 10:44:51 AM	Tech: C. Russ PC: E. Bradley	
Structure ID: SF-100			
P2 MH048LD12X			
XYPEX MH FLAT TOP w/24" ECC Hole F/G			

- P4) 24" - CASTING HEIGHT - 6"
 P3) 24" - XYPEX GRADE RING F/F - 4"
 P2) 48" - XYPEX MH FLAT TOP w/24" ECC Hole F/G - 12"
 P1) 48" - MH BASE Custom Ht, w/XYPEX T/n - 72"
 1) 48" - MH INVERT CHANNEL w/XYPEX - FULL HEIGHT
 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
 1) ADMIXTURE XYPEX C-500 NF RED
 1) CASTING - JBS 1155 F/C SANITARY
 1) 48" - Conseal CS-102 1.00" (Double)
 2) 24" - Conseal CS-102 1.00" (Double)
 2) A-Lok - 0820
 1) PSX - 16Y NYLO
 1) PSX - 12-08 NYLO

0 lb	Structure Notes:
270 lb	
2205 lb	1. PER ASTM C-478 SPECIFICATIONS
5721 lb	2. CONCRETE: 4,000 PSI AT 28 DAYS
1440 lb	3. REINFORCEMENT: #4 BAR @ 10" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
0 lb	4. XYPEX C-500 ADMIXTURE REQUIRED
0 lb	5. JBS 1155 FRAME & COVER "SANITARY" SUPPLIED BY ICAST
250 lb	6. LIFTERS: 3 EA. WRA016 CONAC WIRE ROPE ANCHORS FOR PLANT & FIELD HANDLING
0 lb	7. TOP SURFACE TO RECEIVE FLOATED FINISH
0 lb	
2 lb	
8 lb	
8 lb	
Structure Total: 9904 lb	

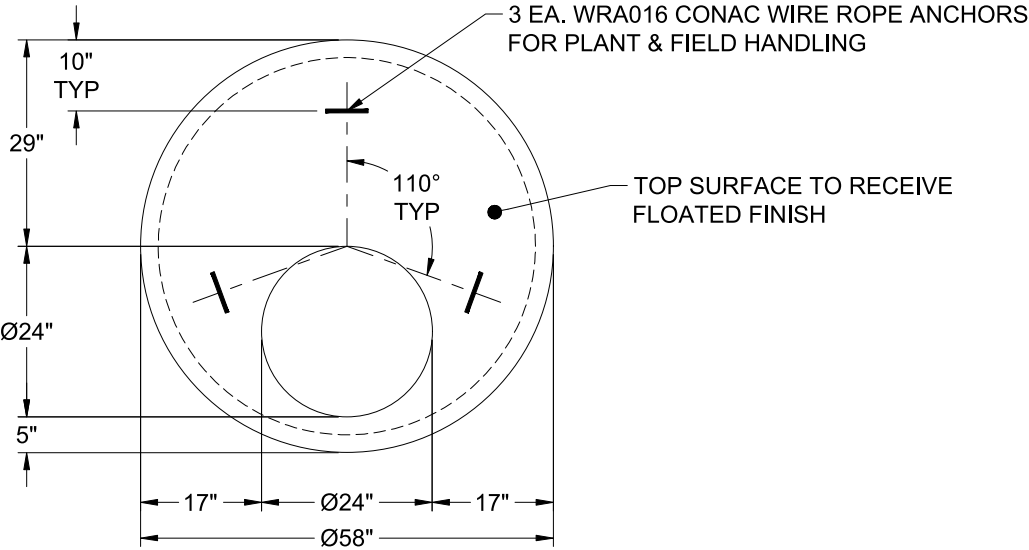

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 12"	Weight (Net): 2205 lb Volume (Net): 0.56cu.yd
----------------------------------	----------------------------------	--------------------	-------------------	--