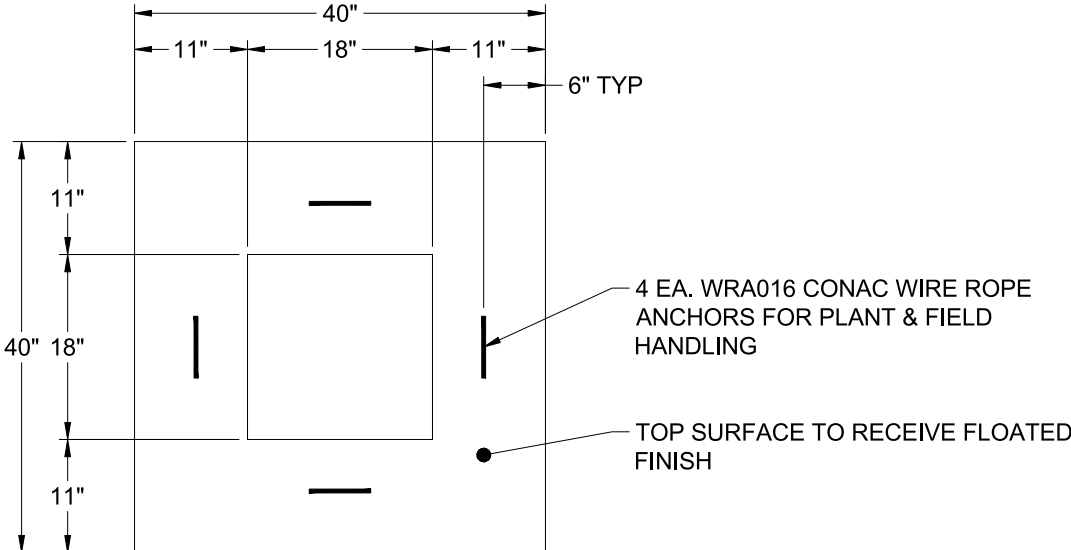
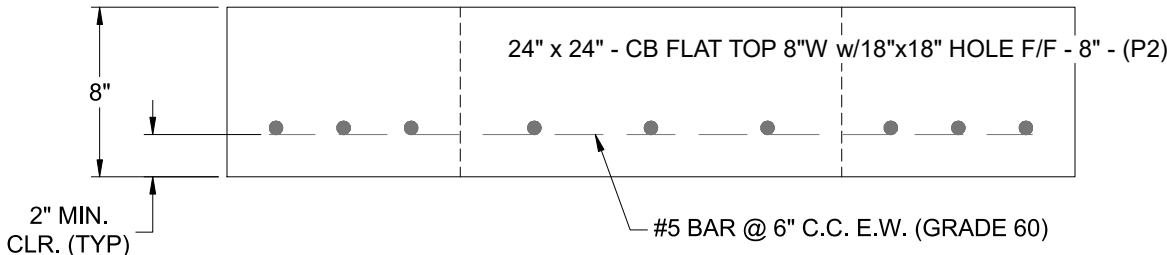


Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315)		Plant: 100	Tech: J. Horsley - A	
Job Location: Indiana, KY Contractor: Louisville Paving and Construction		6/17/2026 5:41:42 PM	PC: J. Jarvis	
Structure ID: 134				
P2 BX024024-08LD08S		CB FLAT TOP 8"W w/18"x18" HOLE F/F		
P3) 18" x 18" - CASTING HEIGHT - 4" P2) 24" x 24" - CB FLAT TOP 8"W w/18"x18" HOLE F/F - 8" P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht F/n - 57" 1) 24" x 24" - Conseal CS-102 1.00" 1) 18" x 18" - Conseal CS-102 1.00" 1) Hole - 20 1) Hole - 22 1) Hole - 18		0 lb 857 lb 5335 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 0 lb Structure Total: 6192 lb	<u>Structure Notes:</u> 1. PER MSD YARD DRAIN / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 6" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE 165-A FRAME & GRATE SUPPLIED BY OTHERS 5. LIFTERS: 4 EA. WRA016 CONAC WIRE ROPE ANCHORS FOR PLANT & FIELD HANDLING 6. TOP SURFACE TO RECEIVE FLOATED FINISH	
				
				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 8"	Height (Ext): 8"	Weight (Net): 857 lb Volume (Net): 0.22cu.yd