

Job Name: 25-3040B - Stonedale Farms	Plant: 100	Tech: Jared - F	
Job Location: Nicholasville, KY	9/4/2026 12:09:41 PM	PC: T. Ryan	
Contractor: Weddle Enterprises, Inc			

Structure ID: PS 1


P1 MH144EBVF12-OCT-CDARED MH BASE EXT OCTAGON (12"F) Custom Ht, w/ConBlock-CDA Red

P4) 144" - MH FLAT TOP w/84" HOLE w/Conblock CDA Red F/G - 18"	18956 lb	Structure Notes: 1. PER ASCTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. ADMIXTURE = CONBLOCK CDA RED. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DOUBLE MAT) - WALLS/RISER (As .36) - FLOOR (As .31) #5 BARS AT 10" C.C.E.W. (DOUBLE MAT) NOTE: 8 EA. 8CA18 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING – 4 EA. INSTALLED AT 45, 135, 225 & 315, 18" FROM TOP OF WALLS & 4 EA. INSTALLED IN FLOOR
P3) 144" - MH RISER Custom Ht, w/ConBlock-CDA Red T/G - 96"	51405 lb	
P2) 144" - MH RISER Custom Ht, w/ConBlock-CDA Red T/G - 96"	51254 lb	
P1) 144" - MH BASE EXT OCTAGON (12"F) Custom Ht, w/ConBlock-CDA Red T/n - 48"	52843 lb	
3) JOINT WRAP - 12" WD x 144" MAC WRAP	0 lb	
1) ADMIXTURE CONBLOCK CDA RED	0 lb	
3) 144" - Conseal CS-231 1.00" (Double)	0 lb	
1) 84" - Conseal CS-231 1.00" (Double)	0 lb	
2) Kor-N-Seal2 - S206-20L	13 lb	
1) PSX - 8QRS-S NYLO	6 lb	
1) PSX - 12M NYLO	8 lb	
1) PSX - 12-06 NYLO	8 lb	
Structure Total:	174493 lb	


Rim: 992.5'	Rim to Invert: 20'	Slack: 0"	Sump: 18"	Step Position:						
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	972.5'	0°	0"	16" DI	17.5"	Kor-N-Seal2 S206-20L	20"	20.065"	16"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

FIRST POUR DRAWING


WEIGHTS
FIRST POUR - 44,303 LBS
SECOND POUR - 8,540 LBS
TOTAL - 52,843 LBS

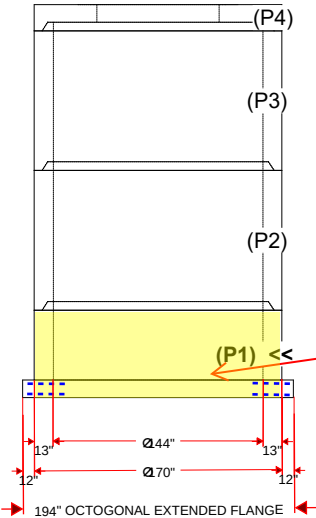

RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimenions)

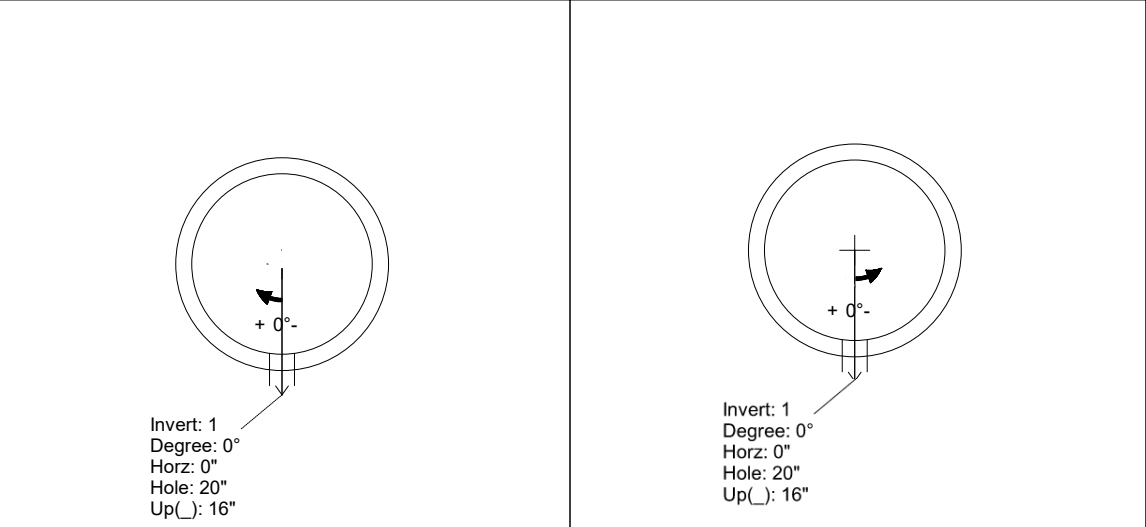

INSIDE WALL DIMENSIONS

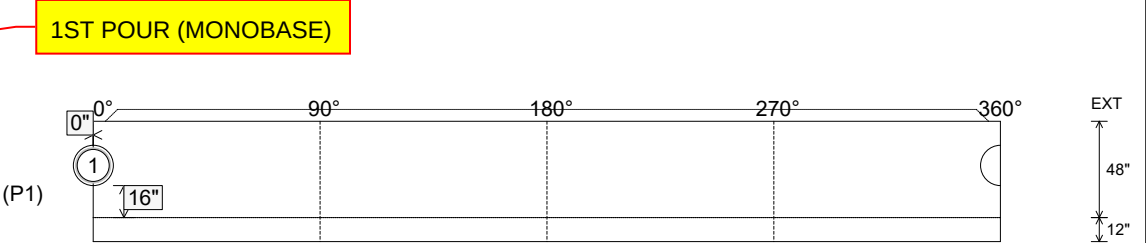

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 13" Floor Height: 12"	Height (Int): 48" Height (Ext): 60"	Weight (Net): 52843 lb Volume (Net): 13.5cu.yd
----------------------------------	---------------------------------	--	--	---

Job Name: 25-3040B - Stonedale Farms
Job Location: Nicholasville, KY
Contractor: Weddle Enterprises, Inc

Plant: 100

Tech: Jared - F

9/4/2026 12:09:41 PM

PC: T. Ryan



Structure ID: PS 1

P1 MH144EBVF12-OCT-CDARED

MH BASE EXT OCTAGON (12"F) Custom Ht, w/ConBlock-CDA Red

- P4) 144" - MH FLAT TOP w/84" HOLE w/Conblock CDA Red F/G - 18"
P3) 144" - MH RISER Custom Ht, w/ConBlock-CDA Red T/G - 96"
P2) 144" - MH RISER Custom Ht, w/ConBlock-CDA Red T/G - 96"
P1) 144" - MH BASE EXT OCTAGON (12"F) Custom Ht, w/ConBlock-CDA Red T/n - 48"
3) JOINT WRAP - 12" WD x 144" MAC WRAP
1) ADMIXTURE CONBLOCK CDA RED
3) 144" - Conseal CS-231 1.00" (Double)
1) 84" - Conseal CS-231 1.00" (Double)
2) Kor-N-Seal2 - S206-20L
1) PSX - 8QRS-S NYLO
1) PSX - 12M NYLO
1) PSX - 12-06 NYLO

18956 lb
51405 lb
51254 lb
52843 lb
0 lb
0 lb
0 lb
0 lb
13 lb
6 lb
8 lb
8 lb

Structure Total: 174493 lb

Structure Notes:

1. PER ASCTM C478 SPECIFICATIONS.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. ADMIXTURE = CONBLOCK CDA RED.
- REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DOUBLE MAT)
- WALLS/RISER (As .36)
- FLOOR (As .31) #5 BARS AT 10" C.C.E.W. (DOUBLE MAT)

Rim: 992.5' Rim to Invert: 20' Slack: 0" Sump: 18" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (L)	Offset
Invert 1	972.5'	0°	0"	16" DI	17.5"	Kor-N-Seal2 S206-20L	20"	20.065"	16"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)




SECOND POUR DRAWING

WEIGHTS


FIRST POUR - 44,303 LBS

SECOND POUR - 8,540 LBS

TOTAL - 52,843 LBS

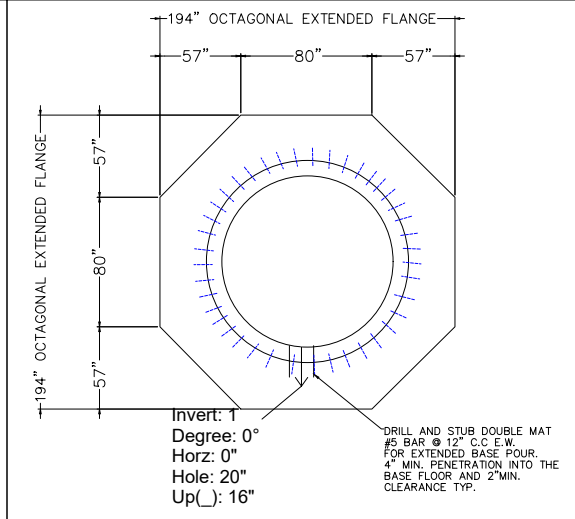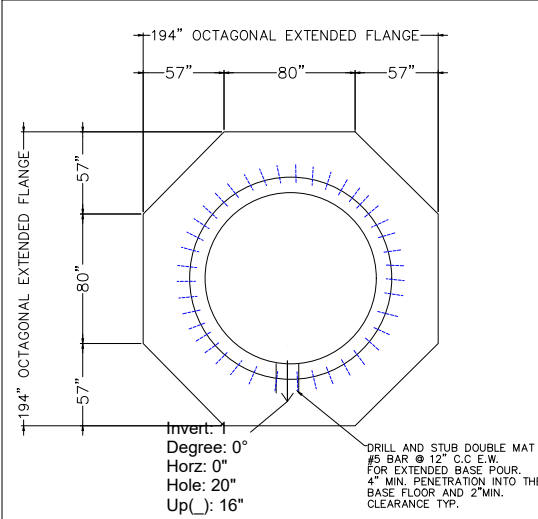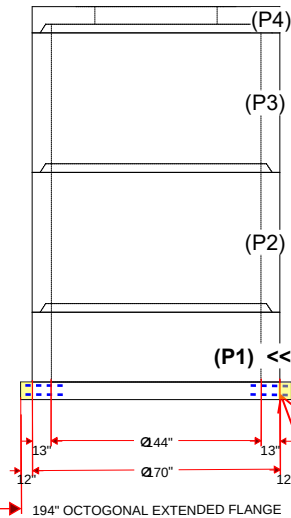

INSIDE WALL DIMENSIONS

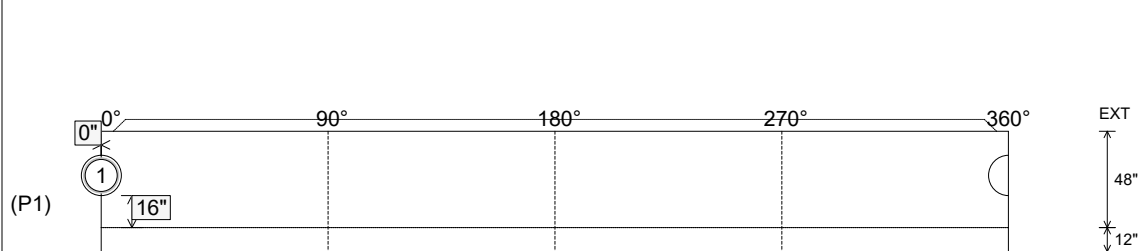

2ND POUR (EXTENDED FLANGE)

Coating (Int):
Coating (Ext):

Seam Up: Tongue
Seam Dn: n/a

Wall Thickness: 13"
Floor Height: 12"

Height (Int): 48"
Height (Ext): 60"

Weight (Net): 52843 lb
Volume (Net): 13.5cu.yd