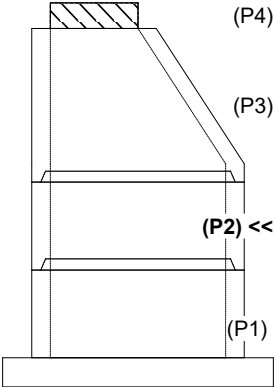
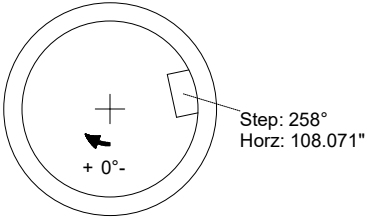
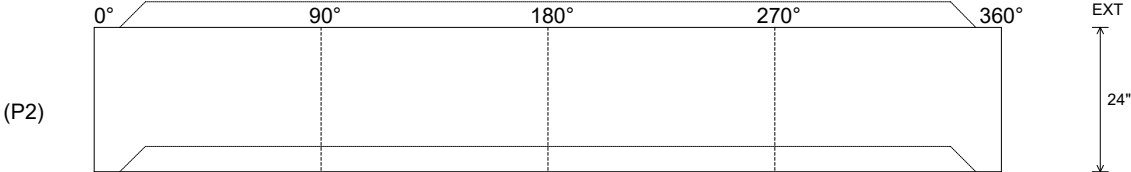


Job Name: 25-3579 - Lebanon Rd Clarks Run Trunk Sewer Ph 2					Plant: 100		Tech: J. Horsley					
Job Location: Danville, KY					8/21/2026 1:12:54 PM		PC: C. Goff					
Contractor: Hubert Excavating & Contracting												
Structure ID: MH E1												
P2		MH048RS24S										
MH RISER w/COATING T/G												
P4) 24" - CASTING HEIGHT - 7" P3) 48" - ECC CONE w/ 24" HOLE, w/Coating F/G - 42" P2) 48" - MH RISER w/COATING T/G - 24" P1) 48" - MH BASE w/FLANGE (08F/08EF) w/Coating T/n - 24" 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) JOINT WRAP - 12" WD x 048" MAC WRAP 1) SPECIAL EXTERNAL COATING 2) 48" - Conseal CS-102 1.00" (Double) 2) PSX - 16M NYLO 8) MH Step ML-10-TDS-NCR - 10" 117.49 SqFt) Carboline Bitumastic 300M [EXT]					0 lb 3116 lb 1677 lb 4392 lb 1440 lb 0 lb 0 lb 0 lb 16 lb 0 lb 0 lb ----- Structure Total: 10641 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY OTHERS (HOE WT-375 SAN. F/C). 4. ALL PIECES TO HAVE EXTERIOR COATING (CARBOLINE BITUMASTIC 300M). REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 903.3'					Rim to Invert: 7.92'		Slack: 0.04"		Sump: 2"		Step Position: 258°	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset		
Invert 1												
Invert 2												
Invert 3												
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												
RIGHT-SIDE UP VIEW (int. dimensions)												
												
INSIDE WALL DIMENSIONS												
												
Coating (Int):			Seam Up: Tongue			Wall Thickness: 5"			Height (Int): 24"			
Coating (Ext): Carboline Bitumastic 300M			Seam Dn: Groove			Floor Height: 0"			Height (Ext): 24"			
									Weight (Net): 1677 lb			
									Volume (Net): 0.43cu.yd			

Job Number:

25-3579

Job Name:

Lebanon Rd Clarks Run Trunk Sewer Ph 2

Structure:

MH E1

Note:

This structure is to receive an external coating of carboline 300M (supplied by ICAST)