

Structure ID: C-11 SS-MH

P2 MH048RS60

MH RISER T/G

P4) 24" - CASTING HEIGHT - 7" P3) 48" - ECC CONE w/ 24" HOLE F/G - 30" P2) 48" - MH RISER T/G - 60" P1) 48" - MH BASE T/n - 24" 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) Inflow Dish FOR MC-315 1) CASTING - HOE MC-315 Self Seal F/C Sanitary 2) 48" - Conseal CS-102 1.00" (Double) 1) PSX - 12-08 NYLO 9) MH Step ML-10-TDS-NCR - 10"	0 lb 2050 lb 4192 lb 2959 lb 1440 lb 0 lb 0 lb 2 lb 258 lb 0 lb 8 lb 0 lb ----- Structure Total: 10908 lb
--	--



Structure Notes:

1. PER ASTM C-478 SPECS
2. CONCRETE: 4,000 PSI AT 28 DAYS
3. REINFORCEMENT: PER ASTM A615
4. STEPS AT 0 DEGREES
5. HOE MC-315 FRAME & COVER "SANITARY" SUPPLIED BY ICAST
6. HOE MC-315 INFLOW DISH SUPPLIED BY ICAST


Rim: 454' Rim to Invert: 10.06' Slack: 1.72" Sump: 2" Step Position: 0°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

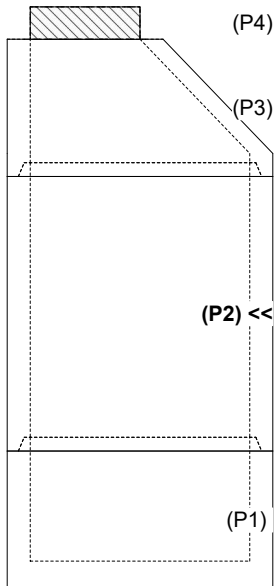

INSIDE WALL DIMENSIONS

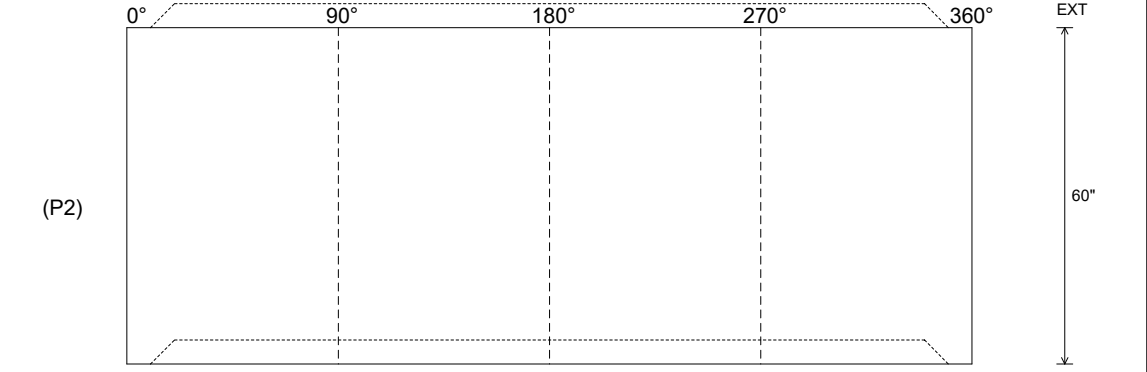

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 60" Height (Ext): 60"	Weight (Net): 4192 lb Volume (Net): 1.07cu.yd
----------------------------------	------------------------------------	--	--	--