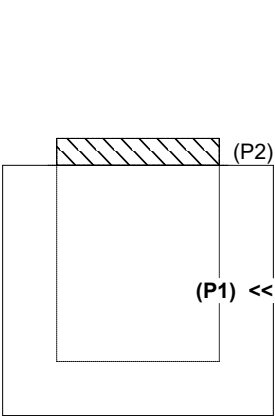
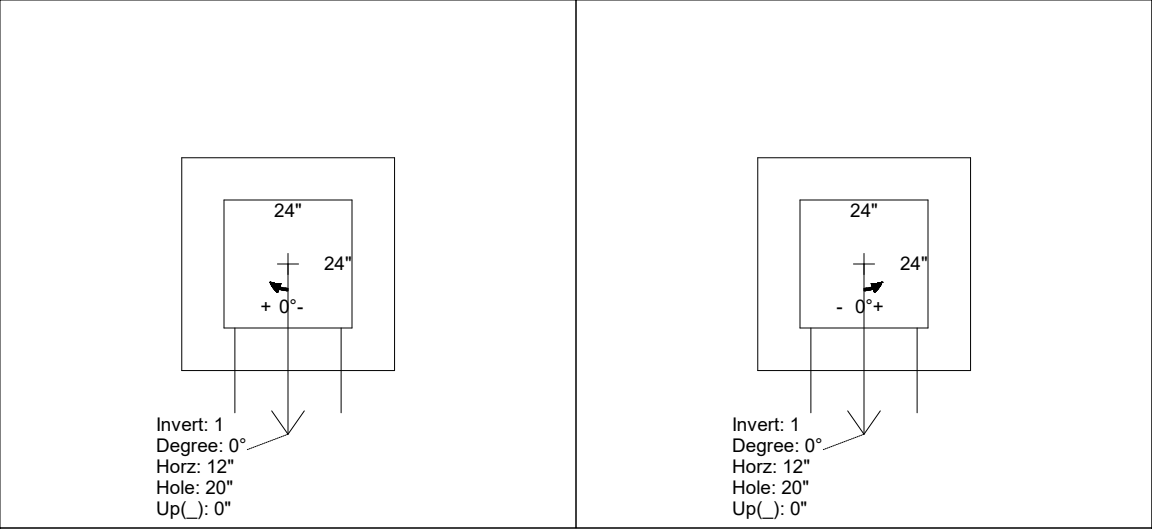
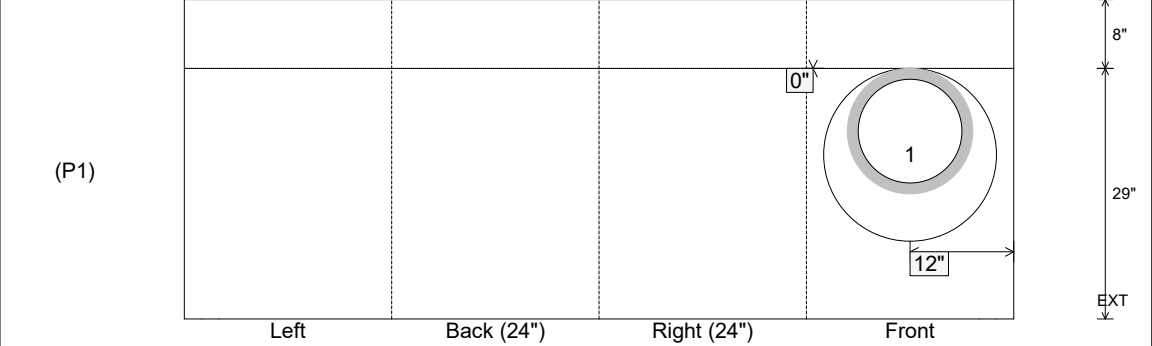


Job Name: 26-1364 - Ollie Car Wash Job Location: Owensboro, KY Contractor: Winwater Hartford KY Co.				Plant: 100 6/8/2026 12:13:28 PM		Tech: Jared - F PC: A. Chambers					
Structure ID: 471,62-4 ST-DBI											
P1 BX2424-08BAVF				BOX BASE 8inW, 8inF, Variable Ht F/n							
P2) 24" x 24" - CASTING HEIGHT - 4" P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht F/n - 29" 1) CASTING - HOE 280T F/G 1) 24" x 24" - Conseal CS-102 1.00" 1) Hole - 20				0 lb 3355 lb 182 lb 0 lb 0 lb ----- Structure Total: 3537 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 280T F/G) REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.					
Rim: 474.3'				Rim to Invert: 2.68'		Slack: 0.41"		Sump: 1.25"		Step Position:	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	471.62'	0°	20"	12" HDPE	14.5"	Hole 20	20"	20"	0"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimenions)  INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: n/a		Wall Thickness: 8" Floor Height: 8"		Height (Int): 29" Height (Ext): 37"		Weight (Net): 3355 lb Volume (Net): 0.86cu.yd	