

Job Name: 26-1430 Commercial Strip Center at Gateway Commons  
 Job Location: Owensboro, KY  
 Contractor: Winwater Hartford KY Co.

Plant: 100

4/27/2026 9:25:37 AM

Tech: Jared - A

PC: Andy Chambers



**Structure ID: BE-8**

**P1 BX3030-06BA18**

**BOX BASE 6inW, 6inF F/n**

- P2) 30" x 30" - CASTING HEIGHT - 4"
- P1) 30" x 30" - BOX BASE 6inW, 6inF F/n - 18"
- 1) CASTING - HOE 468 F/G
- 1) 30" x 30" - Conseal CS-102 1.00"
- 1) Hole - 15

0 lb  
 2077 lb  
 489 lb  
 0 lb  
 0 lb  
 -----  
 Structure Total: 2566 lb



- Structure Notes:
1. PER ASTM C-913 SPECIFICATIONS
  2. CONCRETE: 4,000 PSI AT 28 DAYS
  3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
  4. NO STORM INVERT
  5. NO STEPS
  6. HOE 468 FRAME & GRATE SUPPLIED BY ICAST

Rim: 467.01'    Rim to Invert: 1.88'    Slack: 0.81"    Sump: 0.25"    Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1	465.13'	320°	16.375"	12" PVC SDR35	12.5"	Hole 15	15"	19.581"	0"	10"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)



INSIDE WALL DIMENSIONS

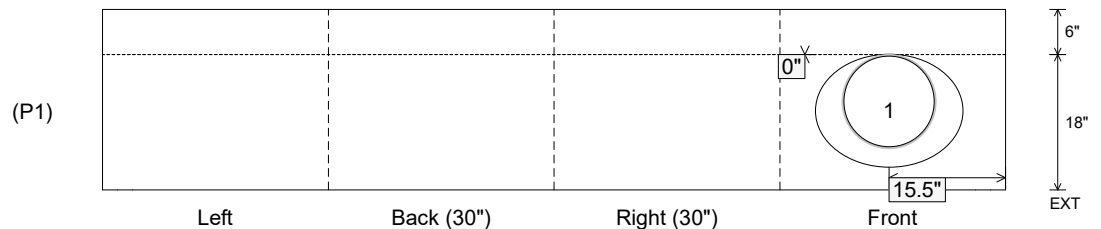

Coating (Int):  
 Coating (Ext):

Seam Up: Flat  
 Seam Dn: n/a

Wall Thickness: 6"  
 Floor Height: 6"

Height (Int): 18"  
 Height (Ext): 24"

Weight (Net): 2077 lb  
 Volume (Net): 0.53cu.yd