

Job Name: 26-1456 Double Kwik
Job Location: Whitesburg, KY
Contractor: Rising Sun Development Company

Plant: Beaver Dam
6/17/2026 2:56:33 PM

Tech: S. Felletter
PC: E. Bradley



Structure ID: 87 59-7 DBI10

P2 BX024030-08LD08-16x28


BX FLAT LID 8inW w/16"x28" HOLE F/F

P3) 16" x 28" - CASTING HEIGHT - 5"
P2) 24" x 30" - BX FLAT LID 8inW w/16"x28" HOLE F/F - 8"
P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht F/n - 39"
1) CASTING - HOE KY-550 F/G (DBI TY 10)
1) 24" x 30" - Conseal CS-102 1.00"
2) Hole - 18
1) Hole - 10

0 lb
934 lb
4498 lb
550 lb
0 lb
0 lb
0 lb

Structure Total: 5982 lb

Structure Notes:
1. KYTC DBI TYPE 10 / ASTM C-913 SPEC'S.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. NO STEPS.
5. CASTING BY ICAST (HOE KY-550 F/G).
REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- WALLS (As .31) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

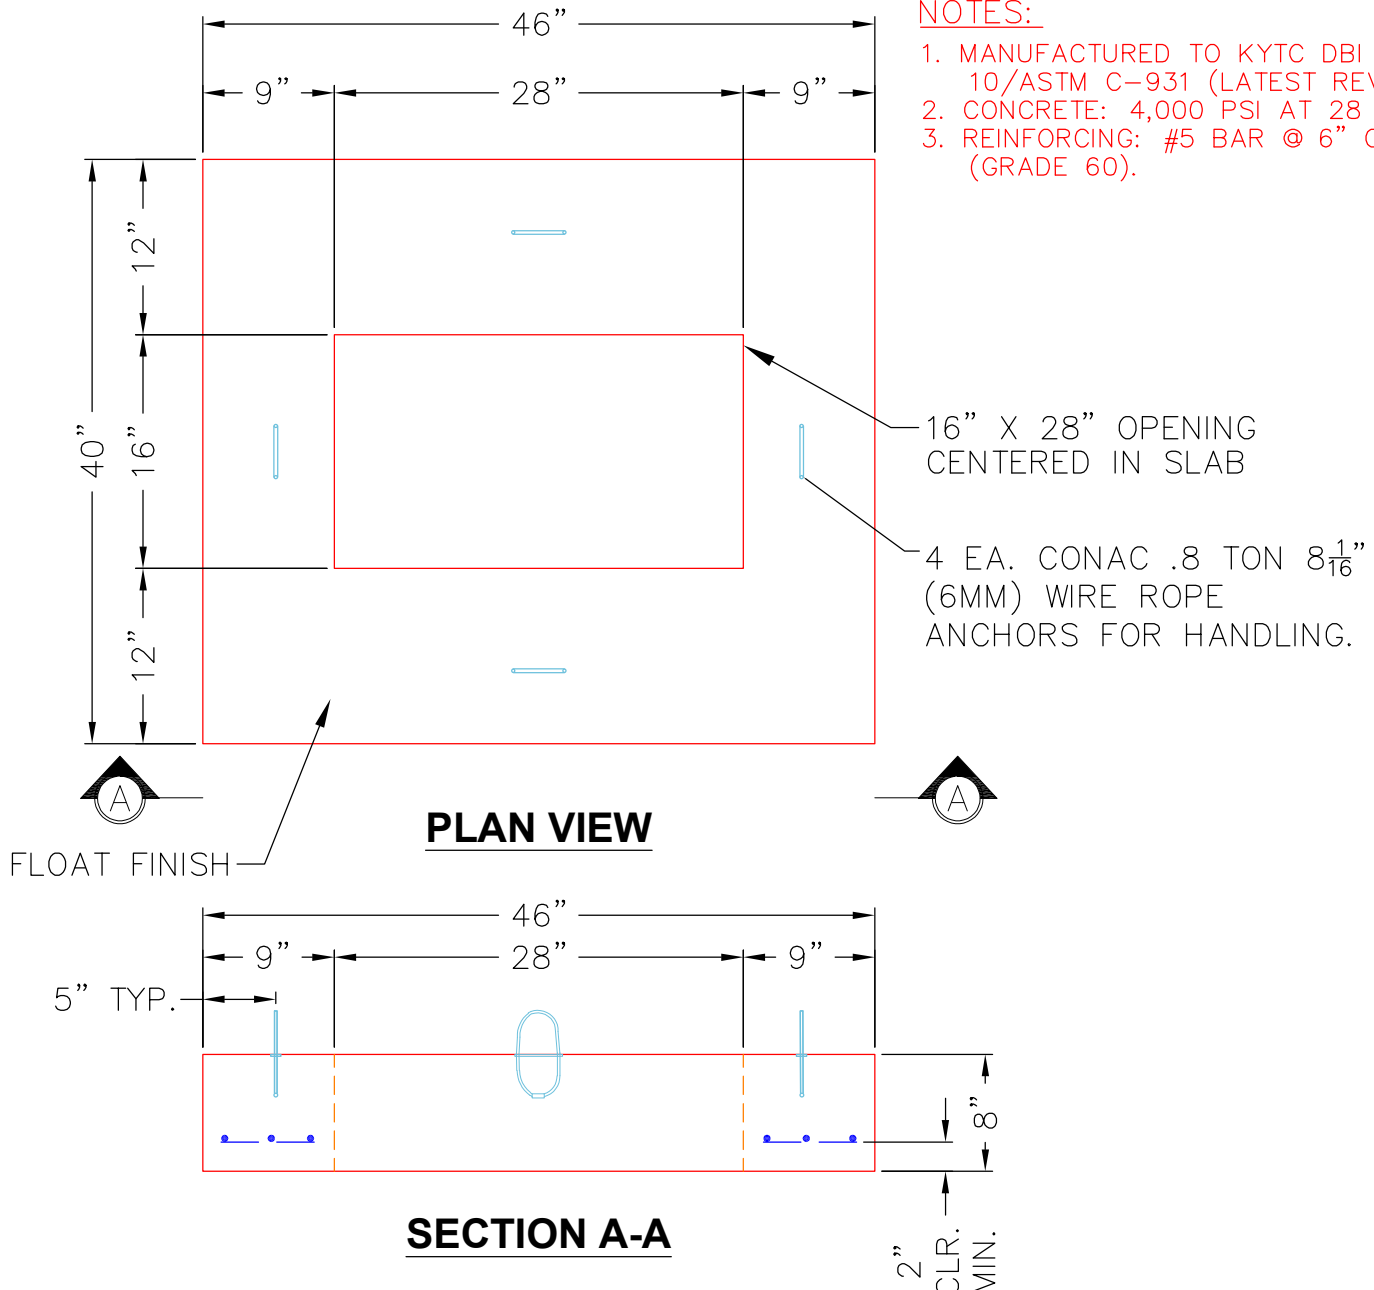

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 934 lb
Volume (Net): 0.24cu.yd