



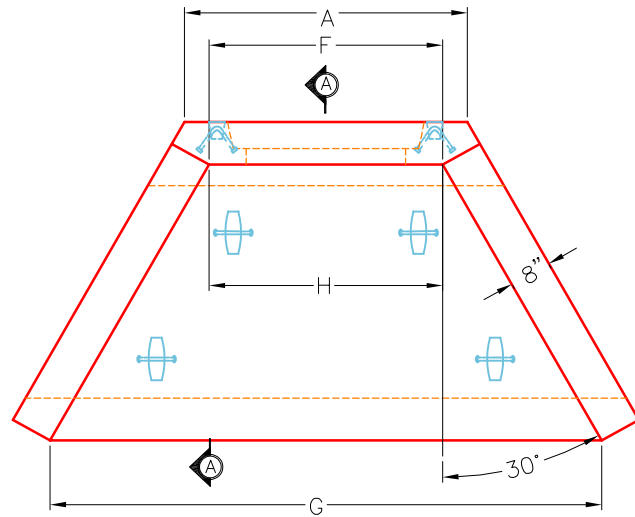


PLAN VIEW

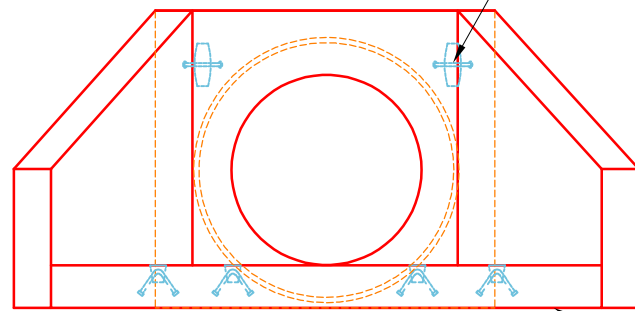


FRONT ELEVATION

DIMENSIONS									
PIPE ϕ	A	B	C	D	E	F	G	H	WEIGHT
36"	4'-6"	4'-8"	4'-0"	1'-6"	5'-0"	4'-0"	8'- 8"	3'-8"	8,820 lbs.

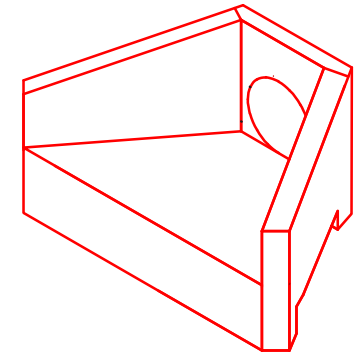

ISOMETRIC VIEW

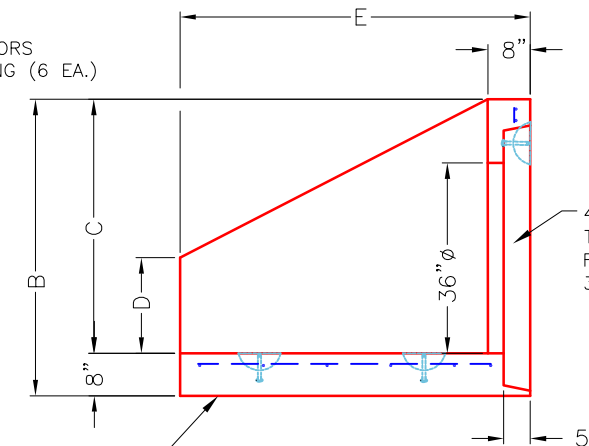

SECTION A-A

~NOTES:

1. CONCRETE: 4500 PSI @ 28 DAYS.
2. REINFORCING: #5 BAR @ 12" C/C E.W.-GRADE 60, (WITH 2" CONCRETE COVER MINIMUM)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWING RDH-110-02, RDH-210-03 AND THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
5. $\frac{3}{4}$ " CHAMFER ON ALL EXPOSED EDGES.

PRODUCTION WORK ORDER		PRODUCT I.D.: HWPC36F	DESCRIPTION: 36" PIPE CULVERT HEADWALL w/FLAT BOTTOM		
	QUALITY CONTROL CHECKLIST ☐ ALL DIMENSIONS CORRECT. ☐ LIFTERS INSTALLED. ☐ STEPPED HF CORRECT SIZE. ☐ REINFORCING CORRECT. ☐ DISSIPATOR BLOCKS INSTALLED. ☐ EDGES CHAMFERED. ☐ ALL PATCHWORK ACCEPTABLE.	PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER: JOHNNY HUNTER CONSTRUCTION		
		PLANT: BEAVER DAM, KY.	PROJECT: MOUNTAIN GOAT TRAIL SEWANEE TO CONWAY		
		WEIGHT: 8,820 LBS.	STRUCTURE ID.: QLL12 HW (P1)		
		TOP SECTION JOINT: N/A	QUOTE/SALES ORDER NO: 26-1771		
		BASE SECTION JOINT: N/A	CHECK: B. SMITH DRAWING: J. HORSLEY		
		QC CHECK INITIALS:	DATE: 07/21/26	SCALE: NTS	PG. 1 of 1