

Job Name: 26-2080 - The Cumberland
Job Location: Bowling Green, KY
Contractor: J & J Concrete & Excavating, LLC

Plant: 100

6/22/2026 6:26:03 PM

Tech: Jared - A
PC: E. Bradley



Structure ID: D3 ST-CI

P3 GR24x36x8x3

GRADE RING F/F


- P4) 24" x 36" - CASTING HEIGHT - 6"
P3) 24" x 36" - GRADE RING F/F - 3"
P2) 48" - MH FLAT TOP w/24"x36" Hole F/G - 12"
P1) 48" - MH BASE T/n - 42"
1) CASTING - HOE 525 SET (F/G/H)
1) 48" - Conseal CS-102 1.00"
2) 24" x 36" - Conseal CS-102 1.00"
1) Hole - 20
4) MH Step ML-10-TDS-NCR - 10"

0 lb
306 lb
1300 lb
4129 lb
442 lb
0 lb
0 lb
0 lb
0 lb

Structure Total: 6177 lb

Structure Notes:

1. PER ASTM C-913 SPECIFICATIONS
2. CONCRETE: 4,000 PSI AT 28 DAYS
3. REINFORCEMENT: #4 BAR AS SHOWN (GRADE 60)
4. LIFTERS: 2 EA. WRA016 CONAC WIRE ROPE ANCHORS FOR PLANT & FIELD HANDLING

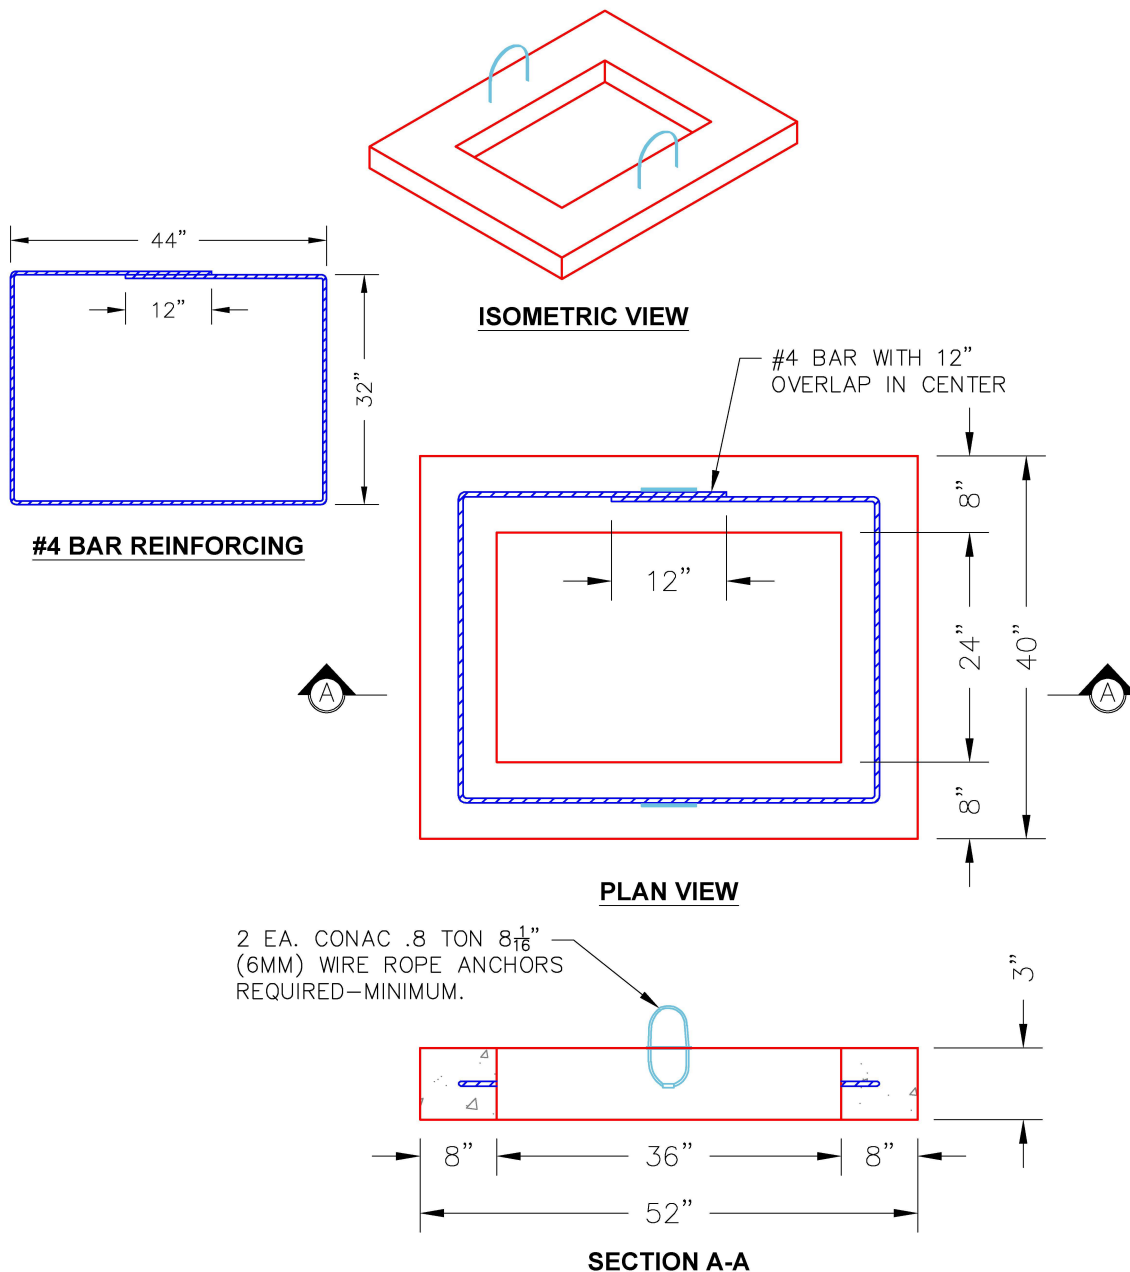

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 3"

Weight (Net): 306 lb
Volume (Net): 0.08cu.yd