


Job Name: 26-2146 - Fairview Apartments Job Location: Russell Springs, KY 42642 Contractor: Dirt Design Construction LLC					Plant: 100 8/3/2026 11:45:24 AM		Tech: J. Horsley PC: M. Sullivan				
Structure ID: 02 ST-SCB											
P1 MH048BAVF			MH BASE Custom Ht								
P3) 32" x 32" - CASTING HEIGHT - 3" P2) 48" - MH FLAT TOP w/32"x32" Hole - 12" P1) 48" - MH BASE Custom Ht - 29" 1) 48" - Conseal CS-102 1.00" 2) Hole - 20						0 lb 1629 lb 3086 lb 0 lb 0 lb ----- Structure Total: 4715 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY OTHERS (HOE 595 F/G) REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB = H20 LOADING. - RISER (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 1058.17' Rim to Invert: 3.7' Slack: 0.4" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	1054.47'	0°	0"	15" HDPE	17.6"	Hole 20	20"	20.629"	-1.3"	0"	
Invert 2	1054.47'	131°	66.305"	15" HDPE	17.6"	Hole 20	20"	20.629"	-1.3"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)

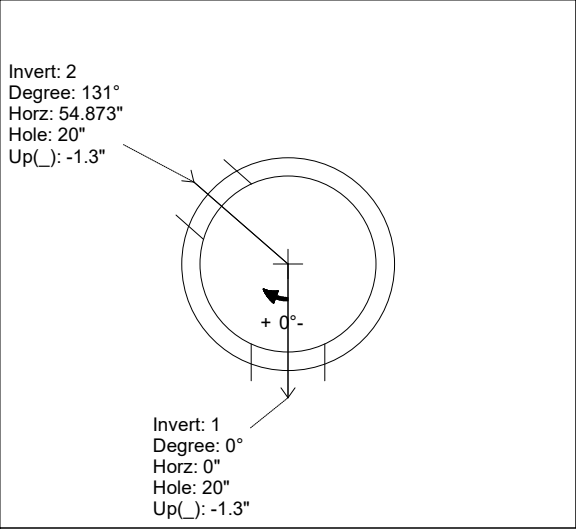

Invert: 2
Degree: 131°
Horz: 54.873"
Hole: 20"
Up(): -1.3"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 20"
Up(): -1.3"


UPSIDE-DOWN VIEW (int. dimenions)

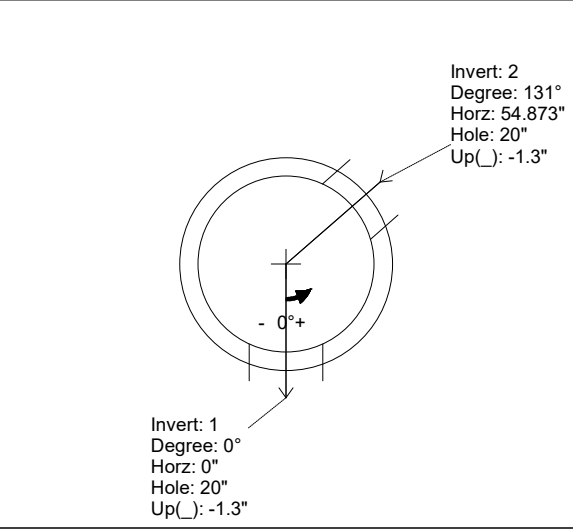

Invert: 2
Degree: 131°
Horz: 54.873"
Hole: 20"
Up(): -1.3"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 20"
Up(): -1.3"

INSIDE WALL DIMENSIONS

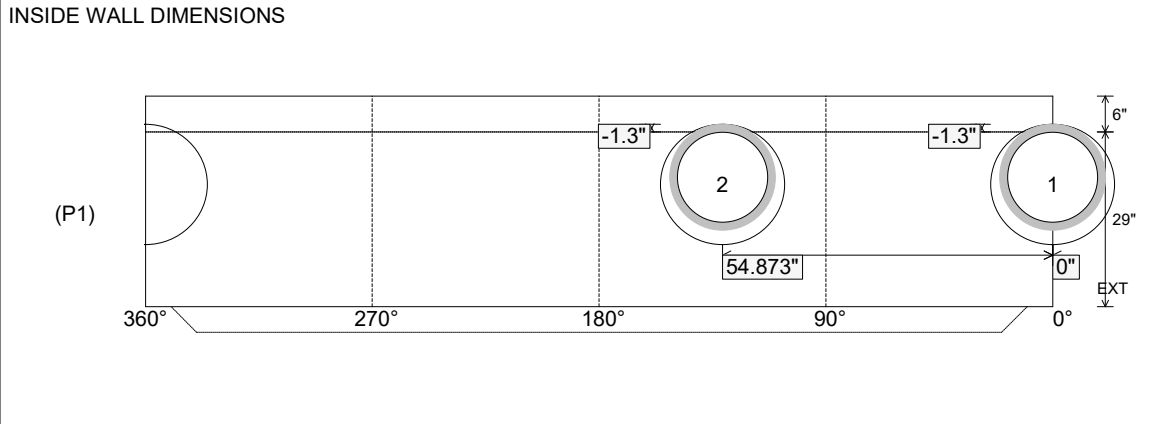

(P1)

360° 270° 180° 90° 0°

6" 29" 0" EXT

1 2

54.873" -1.3" -1.3"

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 29" Height (Ext): 35"	Weight (Net): 3086 lb Volume (Net): 0.79cu.yd
----------------------------------	---------------------------------	--	--	--