




Structure ID: CC1 HW

P1 HWSF15



15" - SLOPED & FLARED HEADWALL

DIMENSIONS										
PPE Ø	A	B	C	D	E	F	G	H	I	WEIGHT
15"	2'-0"	3'-0"	2'-0"	1'-0"	4'-0"	3'	2'-0"	2'-0"	4'-0"	3,181 LBS.

*A-ANCHOR® LIFTING SYSTEM
FOR PLANT & FIELD HANDLING.

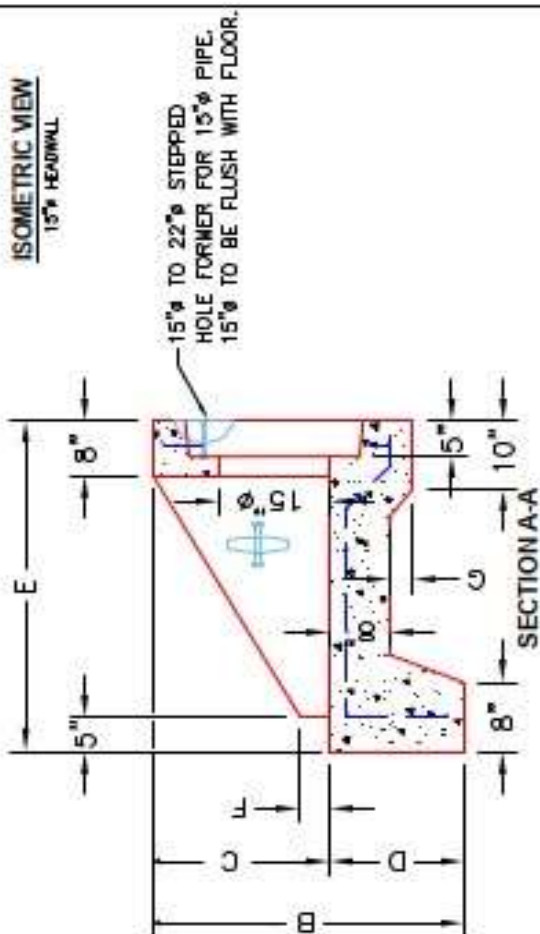

ISOMETRIC VIEW
15" HEADWALL

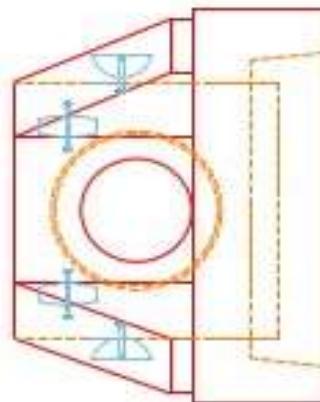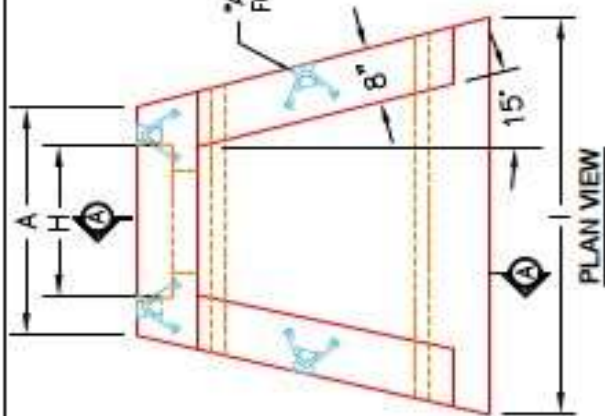


FRONT ELEVATION

- NOTES:**
1. CONCRETE: 4500 PSI @ 28 DAYS.
 2. REINFORCING #4 BAR @ 12" C/C E.W.—GRADE @0, (WITH 2" CONCRETE COVER MINIMUM).
 3. REINFORCING BARS TO BE LACK WELDED OR TIED.
 4. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWING RDH-020-03 AND THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
 5. ~~5. CHAMFER ON ALL EXPOSED EDGES.~~

PRODUCTION WORK ORDER



PRODUCTION WORK ORDER		PRODUCT I.D.: HWSF15	DESCRIPTION: KYTC 15"φ SLOPED & FLARED HEADWALL
	QUALITY CONTROL CHECKLIST	PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER: STOCK
	☐ ALL DIMENSIONS CORRECT. ☐ UPTERS INSTALLED. ☐ STEPPED IF CORRECT SIZE. ☐ REINFORCING CORRECT. ☐ DISSIPATOR BLOCK INSTALLED. ☐ EDGES CHAMFERED. ☐ ALL PATCHWORK ACCEPTABLE.	PLANT: BEAVER DAM, KY.	PROJECT: STOCK INVENTORY
		WEIGHT: 3,161 LBS.	STRUCTURE D.: N/A
		TOP SECTION JOINT: N/A	QUOTE/SALES ORDER NO: N/A
		BASE SECTION JOINT: N/A	CHECK: J.H. ROSS, PE DRAWING: N. RICHARDS
	QC CHECK INITIALS:	DATE: 09/15/22	SCALE: NTS PG. 1 of 1

THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PRECAST, INC. ANY USE OR DUPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.