Job Name: 25-1965 ACEE'S MARKET & DELI
Job Location: Fulton, KY
Contractor: Rinker Underground

Plant: Beaver Dam | Tech: J. Coppage
12/2/2025 7:54:14 AM | PC: J.Jarvis

Structure ID: FES-3

P1 FES15S 15" - RCP FLARED END SECTION SPIGOT (INLET)

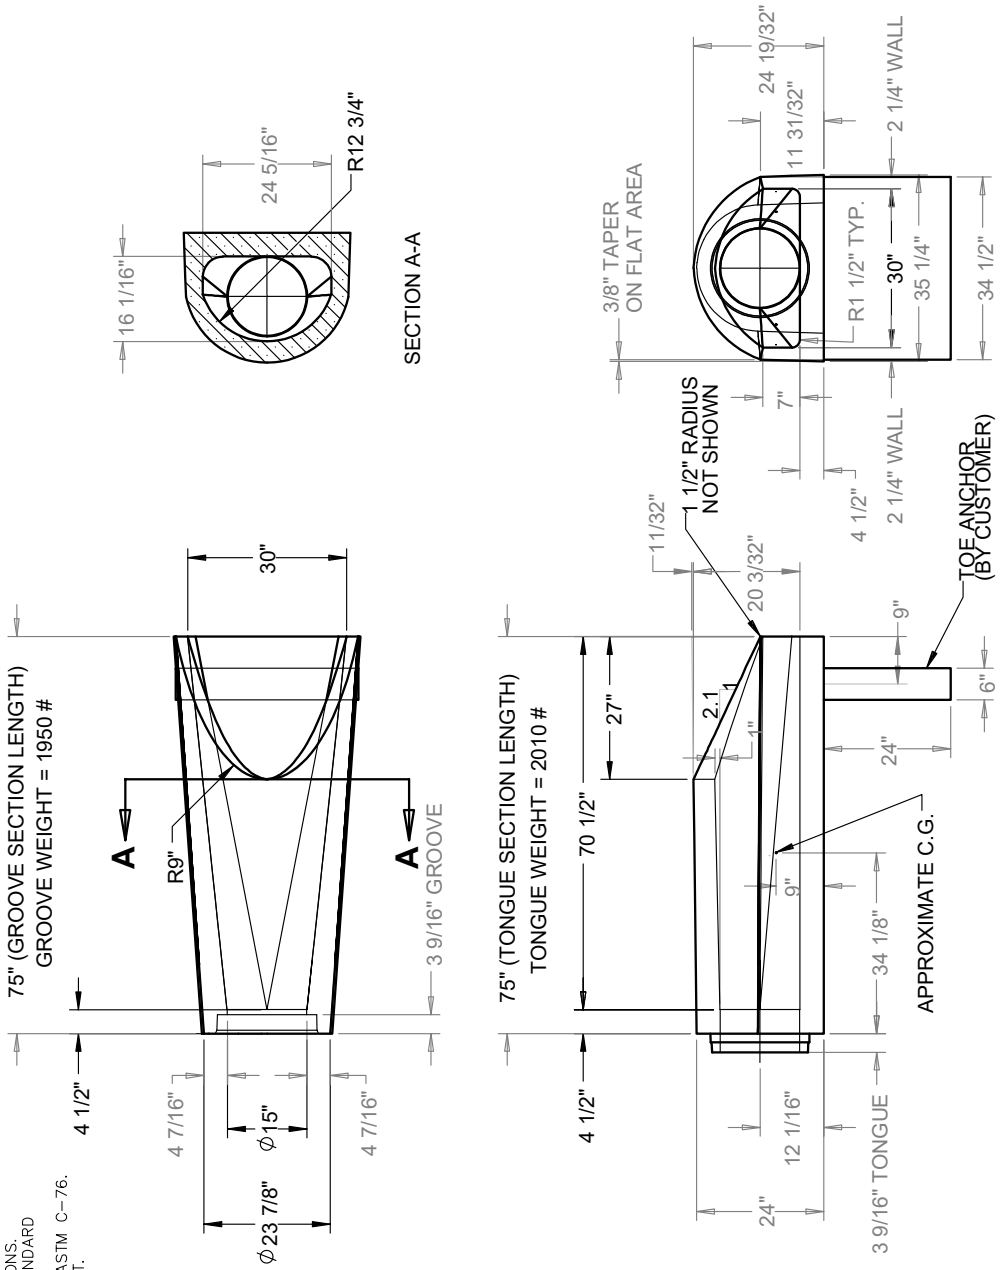

ISOMETRIC VIEW

GENERAL NOTES:

1. FLARED END SECTION IS MANUFACTURED AND TESTED IN ACCORDANCE WITH ASTM C-76 OR ASTM C-655 AND AASHTO M-170 SPECIFICATIONS.
2. ALL PIPE JOINTS MEET ASTM C-443 AND C-361 SPECIFICATIONS.
3. INSTALL REINFORCED CONCRETE PIPE PER ASTM C-1479-STANDARD PRACTICE FOR INSTALLATION OF PRECAST CONCRETE PIPE.
4. FLARED END SECTION REINFORCING IS IN ACCORDANCE WITH ASTM C-76.
5. WEIGHT SHOWN IS CALCULATED USING 150 LBS. PER CUBIC FT. UNIT WEIGHT OF CONCRETE.