

Job Name: 26-3293 - 2025 Sewer System Rehab
Job Location: Westmoreland, TN
Contractor: Luttrell & Sons, LLC

Plant: Beaver Dam

Tech: J. Coppage

9/10/2026 9:04:40 AM

PC: A. Chambers





Structure ID: SMH-3B SS-MH

P3 MH048CN36CDARED

ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red

- P4) 24" - CASTING HEIGHT - 7"
- P3) 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red - 36"
- P2) 48" - MH RISER w/ConBlock-CDA Red - 36"
- P1) 48" - MH BASE w/ConBlock-CDA Red - 24"
- 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
- 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
- 1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT
- 1) CASTING - JBS 1150 F/C SANITARY
- 2) 48" - Conseal CS-102 1.00" (Double)
- 1) 24" - Conseal CS-102 1.00" (Double)
- 1) PSX - 12-08 NYLO
- 8) MH Step ML-10-TDS-NCR - 10"

- Structure Notes: .
- 1. JBS-1150 SAN PROVIDED BY ICAST.
 - 2. PER ASTM C478 SPECIFICATIONS.
 - 3. CONCRETE = 4,000 PSI AT 28 DAYS.
 - 4. ADMIXTURE = CONBLOCK CDA RED.
 - 5. REINFORCING PER ASTM A615 (GRADE 60).
- CONE (As .12)
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
- 0 lb
- 2251 lb
- 2515 lb
- 2959 lb
- 0 lb
- 0 lb
- 1440 lb
- 250 lb
- 0 lb
- 0 lb
- 8 lb
- 0 lb
-
- Structure Total: 9423 lb

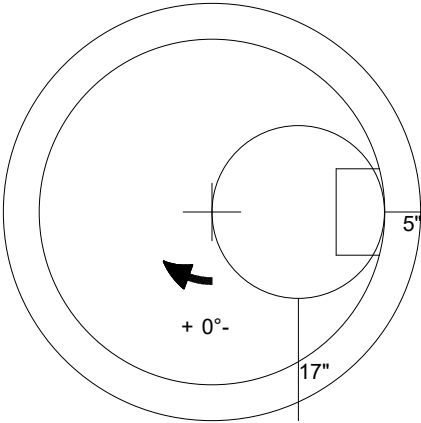

48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red - 36" - (P3)

Coating (Int):	Seam Up: Flat	Wall Thickness: 5"	Height (Ext): 36"	Weight (Net): 2251 lb
Coating (Ext):	Seam Dn: Groove			Volume (Net): 0.57cu.yd