



DIMENSIONS										
PIPE Ø	A	B	C	D	E	F	G	H	I	WEIGHT
15"	2'-9"	3'-6"	2'-0"	1'-6"	4'-0"	3"	28"	2'-0"	4'-9"	3,161 LBS. 1 EA.

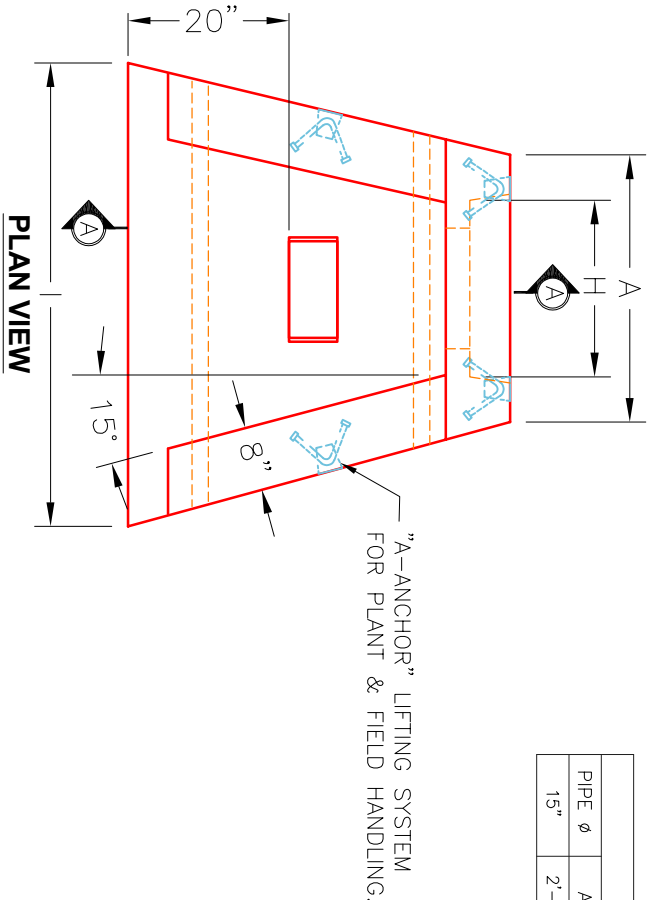


12"X12"X6" ENERGY DISSIPATOR BLOCK (1 EA.).

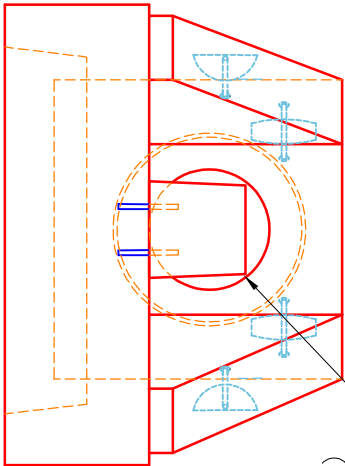


FRONT ELEVATION

- NOTES:**
1. CONCRETE: 4500 PSI @ 28 DAYS.
 2. REINFORCING: #4 BAR @ 12" C/C E.W.-GRADE 60, (WITH 2" CONCRETE COVER MINIMUM)
 3. REINFORCING BARS TO BE TACK WELDED OR TIED.
 4. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWING RDH-020-03 AND THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
 5. 3/4" CHAMFER ON ALL EXPOSED EDGES.

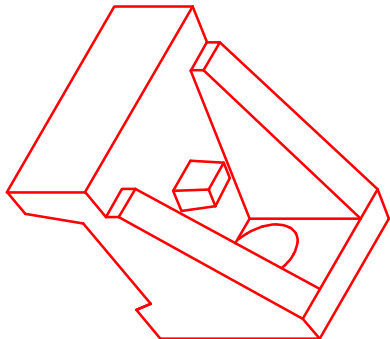


ISOMETRIC VIEW

15"Ø HEADWALL

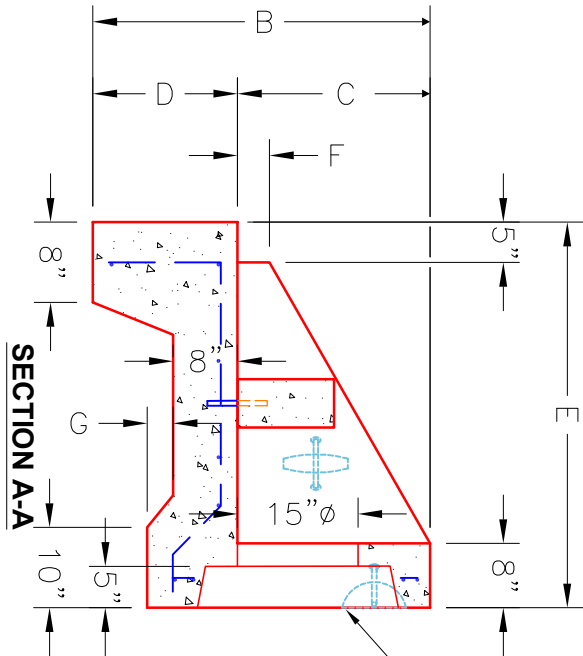

SECTION A-A

2-#5 BAR STUBS FOR POST MOUNTING TO HEADWALL FLOOR.



DISSIPATOR BLOCK DETAIL

PRODUCTION WORK ORDER

PRODUCT I.D.: HWSF15D DESCRIPTION: KYTC 15"Ø SLOPED & FLARED HEADWALL W/DISSIPATORS

QUALITY CONTROL CHECKLIST

ALL DIMENSIONS CORRECT.

LIFTERS INSTALLED.

STEPPED HF CORRECT SIZE.

REINFORCING CORRECT.

DISSIPATOR BLOCK INSTALLED.

EDGES CHAMFERED.

ALL PATCHWORK ACCEPTABLE.

PRODUCT VIEW: RIGHT SIDE UP
PLANT: BEAVER DAM, KY.

CUSTOMER: STOCK
PROJECT: STOCK INVENTORY

WEIGHT: 3,161 LBS.

STRUCTURE ID.: N/A

TOP SECTION JOINT: N/A

QUOTE/SALES ORDER NO: N/A

BASE SECTION JOINT: N/A

CHECK: J.H. ROSS, PE

DRAWING: N. RICHARDS

QC CHECK INITIALS:

DATE: 09/06/22

SCALE: NTS

PG. 1 of 1

